


C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU

JVC

SERVICE MANUAL

COLOUR TELEVISION

C-F14EE/C-FT14EE/C-FT14EBU
C-F20EE/C-FT20EE/C-FT20EBU
C-F21EE/C-FT21EE/C-FT21EBU

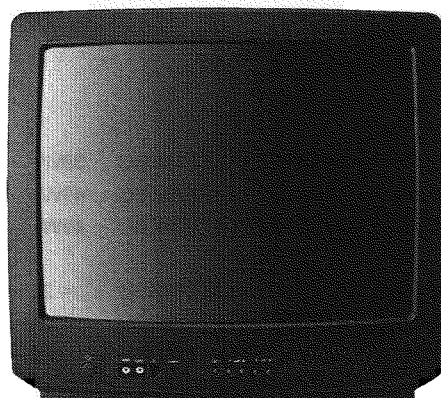

[20" MODEL]

CONTENTS

■ SPECIFICATIONS	1-2
■ SAFETY PRECAUTIONS	1-4
■ SPECIFIC SERVICE INSTRUCTIONS	1-5
■ SERVICE ADJUSTMENTS	1-7
★ STANDARD CIRCUIT DIAGRAM (APPENDED)	
★ PARTS LIST	2-1

C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU


SPECIFICATIONS

Item	Content
TV System	CCIR (B/G , D/K)
Colour System	PAL / SECAM / NTSC (play back only)
Teletext System	C-F14EE/C-F20EE/C-F21EE : Teletext function is not available. C-FT14EE/C-FT20EE/C-FT21EE : TOP / FLOF (8pages memory) C-FT14EBU/C-FT20EBU/C-FT21EBU : TOP / FLOF (8pages memory) [Cyrillic]
Channel Coverage	
VHF band (L)	E2~E4
VHF band (H)	E5~12
UHF band	E21~E69
Cable TV	Mid(X,Y,Z, S1~S10) Super(S11~S20) and Hyper(S21~S41) bands can be received.
Intermediate Frequency	
Video	38.9MHz
Sound	33.4MHz(B/G) , 32.4MHz(D/K)
Colour Sub Carrier Freq.	
PAL	4.43MHz
SECAM	4.40625MHz / 4.25MHz
NTSC	3.58MHz / 4.43MHz
Video/Sound Separation	5.5MHz(B/G) , 6.5MHz(D/K)
Antenna Input Impedance	75 Ω unbalanced, Aerial-type
Power Input	230V AC, 50Hz
Power Consumption	
Stand-by	8W
Operating	C-F14EE / C-FT14EE / C-FT14EBU : 39W C-F20EE / C-FT20EE / C-FT20EBU : 49W C-F21EE / C-FT21EE / C-FT21EBU : 49W
High Voltage	C-F14EE / C-FT14EE / C-FT14EBU : =22~23kV C-F20EE / C-FT20EE / C-FT20EBU : =25~26kV C-F21EE / C-FT21EE / C-FT21EBU : =25~26kV
Speaker	5cm × 9cm (16 Ω)
Audio Output	3W
AV Connection	21 pin scart socket (SCART) × 1 VIDEO input RCA × 1 AUDIO input RCA × 1
Headphone juck	Mini jack (dia. 3.5mm)
Dimensions	C-F14EE / C-FT14EE / C-FT14EBU : 366mm(W) × 341mm(H) × 422mm(D) C-F20EE / C-FT20EE / C-FT20EBU : 492mm(W) × 446mm(H) × 468mm(D) C-F21EE / C-FT21EE / C-FT21EBU : 512mm(W) × 462mm(H) × 489mm(D)
Mass	C-F14EE / C-FT14EE / C-FT14EBU : 10.8kg (TV set only) C-F20EE / C-FT20EE / C-FT20EBU : 17.5kg (TV set only) C-F21EE / C-FT21EE / C-FT21EBU : 19.8kg (TV set only)

Design & specification subject to change without notice.

■ 21-pin Euro connector (SCART socket)

PIN	Signal Designation	Matching Value
1	Audio Out(linked with 3)	0.5Vrms,Imp<1 k Ω (RF 60% MOD)
2	Audio In(linked with 6)	0.5Vrms,Imp>10 k Ω
3	Audio Out(linked with 1)	0.5Vrms,Imp<1 k Ω (RF 60% MOD)
4	Audio Earth	
5	Blue Earth	
6	Audio in (linked with 2)	0.5Vrms,Imp>10 k Ω
7	Blue in	0.7Vpp \pm 3 dB,Imp75 Ω
8	Slow(Function) Switching	TV:0-2V,PERI:9.5-12V,Imp>10 k Ω
9	Green Earth	
10	NC	
11	Green In	0.7Vpp \pm 3 dB,Imp75 Ω
12	NC	
13	Red Earth	
14	NC	
15	Red In, C In	0.7Vpp \pm 3 dB,Imp75 Ω
16	Rapid(Blanking) switching	Logic 0:0-0.4V,Logic 1:1-3V,Imp 75 Ω
17	Video Earth	
18	Rapid Blanking Earth	
19	Video Out	1Vpp \pm 3 dB,Imp75 Ω
20	Video In, Y In	1Vpp \pm 3 dB,Imp75 Ω
21	Common Earth	

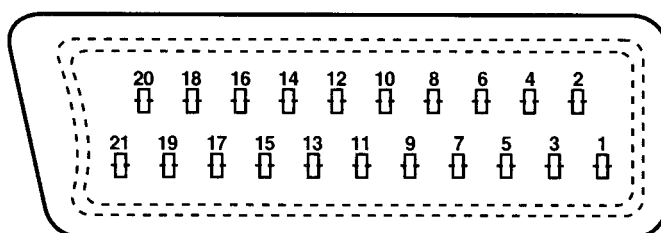


SAFETY PRECAUTIONS

1. The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (\triangle) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
4. **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (\perp) side GND, the ISOLATED(NEUTRAL) : (\nwarrow) side GND and EARTH : (\oplus) side GND. Don't short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND and never measure with a measuring apparatus (oscilloscope etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND at the same time.
If above note will not be kept, a fuse or any parts will be broken.
5. If any repair has been made to the chassis, it is recommended that the +B setting should be checked or adjusted (See +B ADJUSTMENT).
6. The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
7. Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10k Ω 2W resistor to the anode button.
8. When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

SPECIFIC SERVICE INSTRUCTIONS

CONTROL LOCATION

1. Power Switch (ON / OFF)
2. Video Input
3. Audio Input
4. Earphone Jack
5. Power Led
6. Remote Sensor
7. TV / AV Button
8. Volume (Up·Down) Button
9. Program (Up·Down) Button
10. Aerial Jack (TUNER)
11. 21 Pin Socket

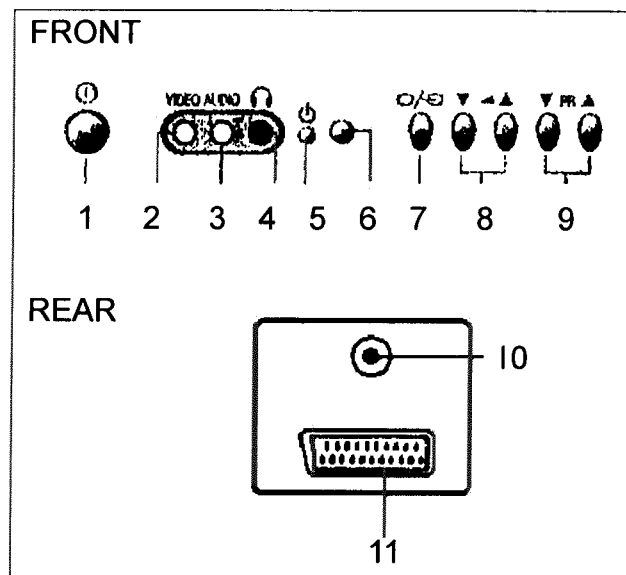


REMOTE HANDSET UNIT

TV MODE

1. Power Button
2. Number Buttons (0~9)
3. Menu Button
4. TV / AV Button
5. Program Up Button
6. Volume Up Button
7. OK Button
8. Program Down Button
9. Volume Down Button
10. Muting Button
11. Recall Button
12. Sleep Button
13. Skip Button
14. Move Button
15. Delete Button
16. Video Text Button
17. Mode Button
18. Time Button

VIDEO TEXT MODE [C-FT14/ 20/21EE , C-FT14/20/21EBU only]

1. Power Button
2. Number Buttons(0~9)
3. Menu Button
4. TV / AV Button
5. Page Up Button
6. Sub page Button
7. Index Button
8. Page Down Button
9. Hold Button
10. Muting Button
11. Reveal Button
12. Size Button
13. Cancel Button
14. G (Volume Up)
15. R (Volume Down)
16. TV Button
17. C (Bright Up)

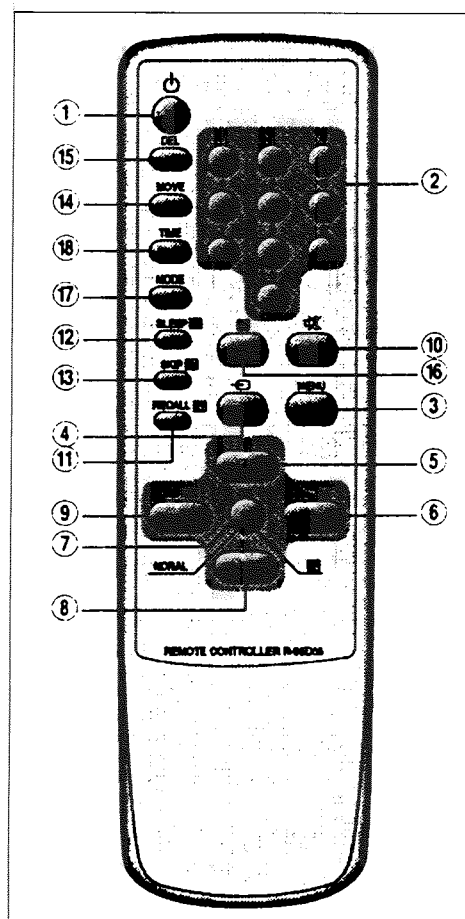


C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU

DISASSEMBLY PROCEDURE

Note : Before starting work, disconnect the power plug from the outlet.

HOW TO REMOVE THE REAR COVER

1. Remove the 5 screws marked A.
2. Remove the rear cover backward.

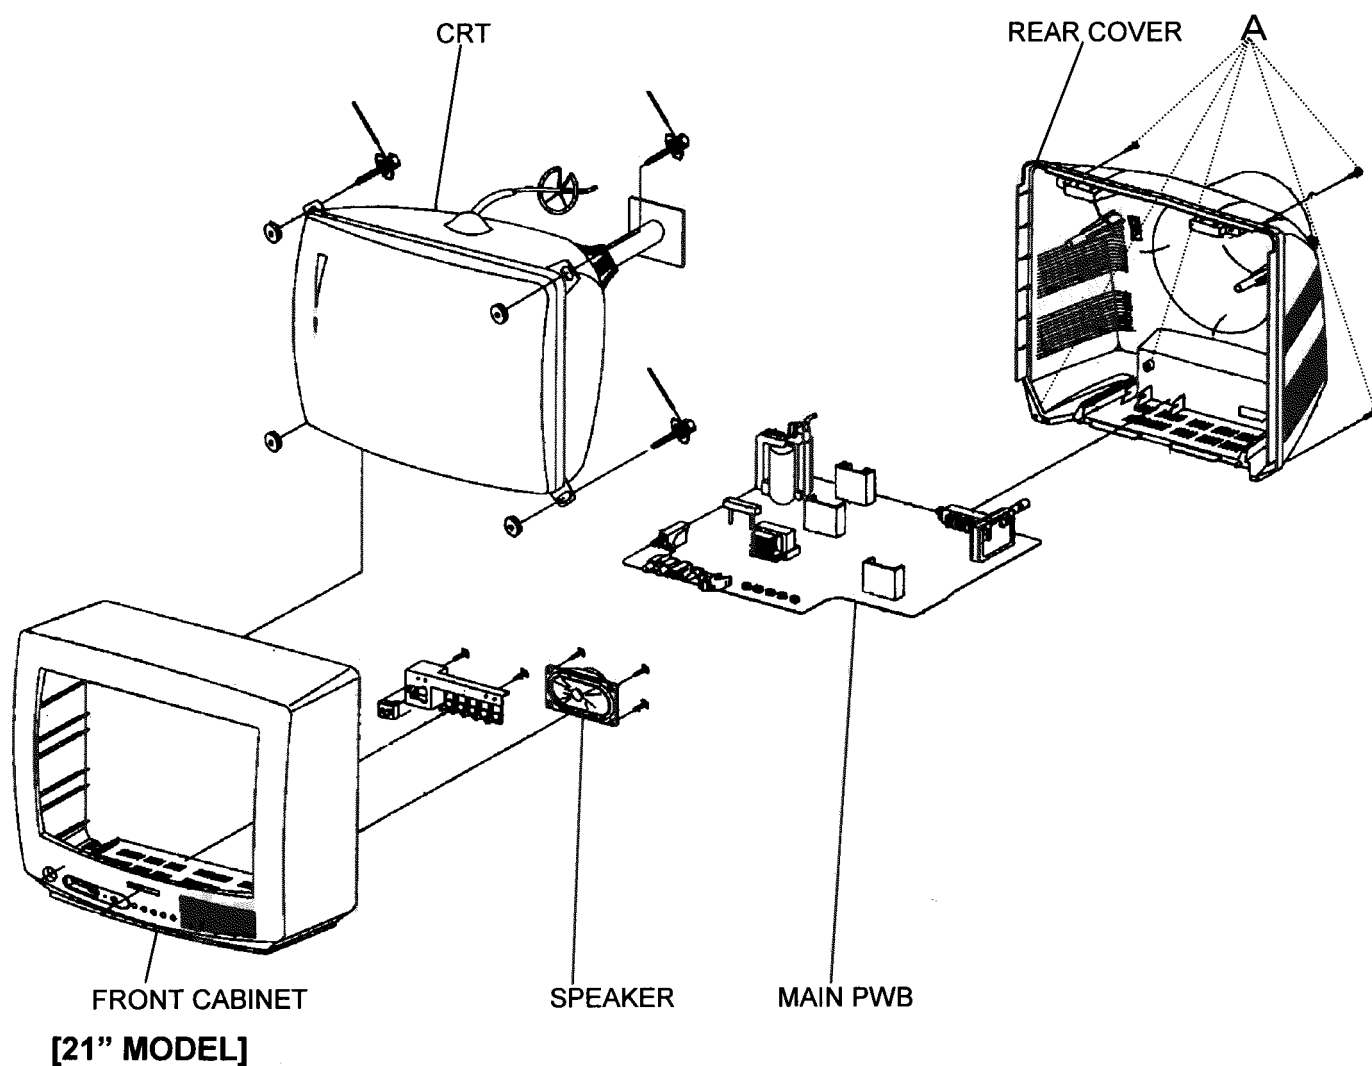

SERVICE ADJUSTMENTS

BEFORE ADJUSTMENT AND MAINTENANCE

1. Don't short any two soldering points or connect any component while TV set is power on.
2. Withdraw power plug before maintenance.
3. In order to ensure safety all components replaced should be identical. (For further details, refer to the component name and component No. in PARTS LIST.)
4. Must be warm up the set for 30 minutes or more and degauss CRT thoroughly with demagnetiser coil before adjustment.

EQUIPMENT FOR ADJUSTMENT

1. Pattern Generator
2. Digital volt meter
3. Oscilloscope
4. Demagnetiser

ADJUSTMENTS PROCEDURES

+B VOLTAGE CHECK

1. Receive a standard colour bar signal.
2. Connect digital volt meter between + of J042 [TP- B+] and GND.
3. Confirm that voltage is DC 110V \pm 1.5V [14" / 20"] , DC 123V \pm 1.5V [21"].

SERVICE REMOTE CONTROLLER

The service remote controller can be used for the following adjustments.

SERVICE MODE

1. Entry: Press the SVC key to enter the service mode.
The title SERVICE is displayed on the screen (Fig. 1).
Exit: Again press the SVC key to release the service mode.
SERVICE extinguishes and normal operation is resumed.
2. After entering the service mode (SERVICE displayed) press the NOR key.
The normal 1 mode is entered and NOR 1 is displayed for several seconds (Fig. 2).
Afterwards, each time the NOR key is pressed, the mode shifts in the sequence NOR 1, NOR 2, white screen (in absence of malfunction), NOR 1.
3. Adjustments for the selected mode are enabled.

Fig 1 : SERVICE MODE






Fig 2 : NOR 1 MODE

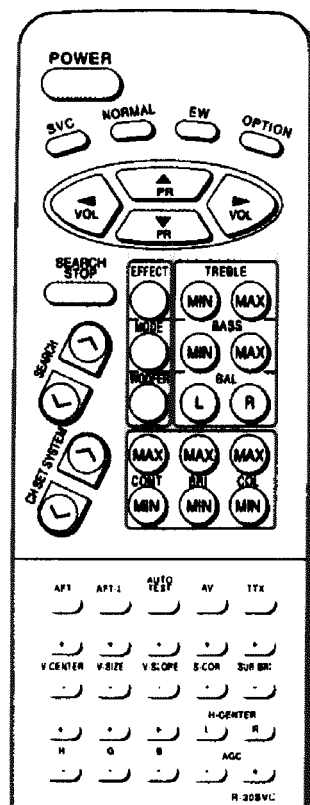

SERVICE REMOTE CONTROLLER

C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU


ADJUSTMENTS WITH SERVICE REMOTE CONTROLLER

■ RF AGC

1. Receive a broadcast signal.
2. Press the AGC + and - keys to where noise appears in the screen.
3. Adjust with the AGC + and - keys to extinguish noise from the screen.
4. Change channels and confirm normal picture.

■ SCREEN

1. Receive a standard color bar signal.
2. Press the CONT MAX and BRI MAX keys to set the contrast and brightness to maximum.
3. Press the COL MIN key to minimize the color.
4. Set the R + and -, G + and -, and B + and - keys to their respective centers (31).
5. Measure the CRT socket PWB connector P908 R, G and B pins with an oscilloscope.
Connect the oscilloscope to the pin with the highest peak voltage.
6. Adjust the Screen knob of the FBT to set the voltage between black level and ground to 160 VDC (20" and 21") or 130 VDC (14").

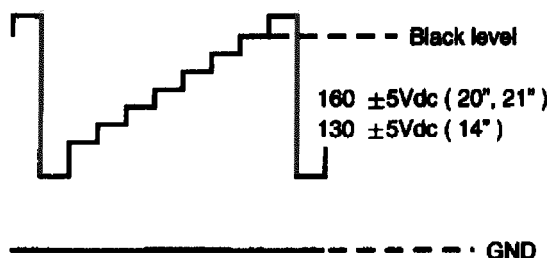

■ WHITE BALANCE

1. Receive a crosshatch (B/Q pattern) signal.
2. Set the R + and -, G + and -, and B + and - keys to their respective centers (31).
3. Respectively adjust the R + and -, G + and -, and B + and - keys for the same R/G/B brightness (white).

■ FOCUS

1. Receive a crosshatch signal.
2. Adjust the Focus knob of the FBT for the clearest picture.

■ DEFLECTION ADJUSTMENTS

VERTICAL CENTER


1. Receive a crosshatch signal.
2. Press the V-CENTER + and - keys to display the picture only on the upper half of the screen.
3. Adjust V-CENTER + and - keys to where the bottom edge of the upper half picture is at the center of the CRT.



VERTICAL SIZE

*Confirm Vertical Center has been adjusted.


1. Receive a crosshatch signal (or a signal having top and bottom symmetrical).
2. Press the V-SIZE + and - keys to change the size of the top and bottom halves of the picture.
3. Adjust the V-SIZE + and - keys to adjust the size of only the bottom half of the picture.
(With overall picture taken as 100 %, adjust for overscan to display about 90 % of the picture.)



VERTICAL SLOPE


*Confirm Vertical Center and Vertical Size have been adjusted.

1. Receive a crosshatch signal (or a signal having top and bottom symmetrical).
2. Adjust the V-SLOPE + and - keys to adjust the size of the bottom half of the picture.
3. Adjust the vertical size of only the bottom half picture with the V-SLOPE + and - keys.
(With overall picture taken as 100 %, adjust for overscan to display about 90 % of the picture.)



VERTICAL S CORRECTION

1. Receive a crosshatch signal.
2. Adjust the S-COR + and - keys for equal spacing between horizontal lines.



HORIZONTAL CENTER

1. Receive a crosshatch signal (or a signal having left and right symmetrical).
2. Press the H-CENTER L and R keys to shift the overall picture left and right.
3. Adjust the H-CENTER L and R keys to align the picture center with the CRT center.


C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU

EEPROM (1703) REPLACEMENT NOTE

The CPU automatically initializes a new EEPROM (not containing data).
Therefore, channel presetting is required after replacing the EEPROM.
Set to the option mode and adjust using the service remote controller.

1. Press the SVC key to enter the service mode.
Exit : Again press the SVC key to release the service mode and resume normal operation.
2. Press the Option key of the service remote controller to produce the option mode.
3. Observe that Option Mode Setting is items are correctly set (AV : A2、BAND : 3BAND、FRANCE : OFF、ATS : ON).
4. To change one or more settings, press the up and down arrow (PR) keys to select the item, then the left and right arrow (VOL) keys of the service remote controller to change the setting.
5. Again press the Option key to release the option mode.

Fig 3 : OPTION MODE

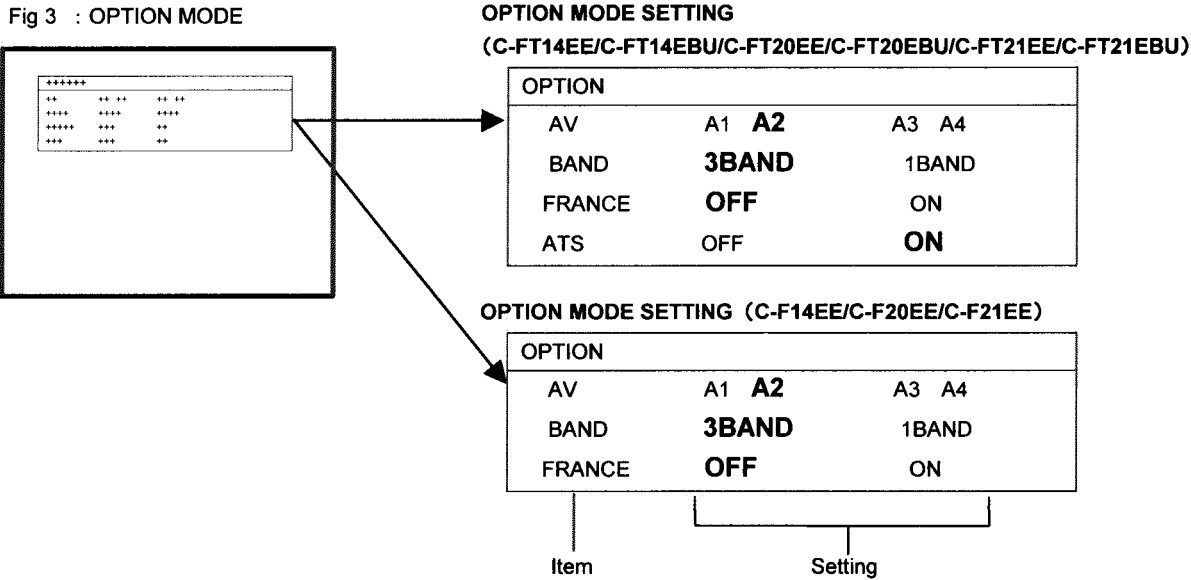


Item : Selected item is magenta. Setting : Selected setting is red.


EEPROM INITIAL DATA (I703)

Item	Variable range	Initial value	Item	Variable range	Initial value
V-CENTER	0~64	33	R	0~64	30
V-SIZE	0~64	30	G	0~64	30
V-SLOPE	0~64	33	B	0~64	30
S-CORRECTION	0~64	0	AGC	0~64	10
H-CENTER	0~64	30			

S.C.D(1)-a

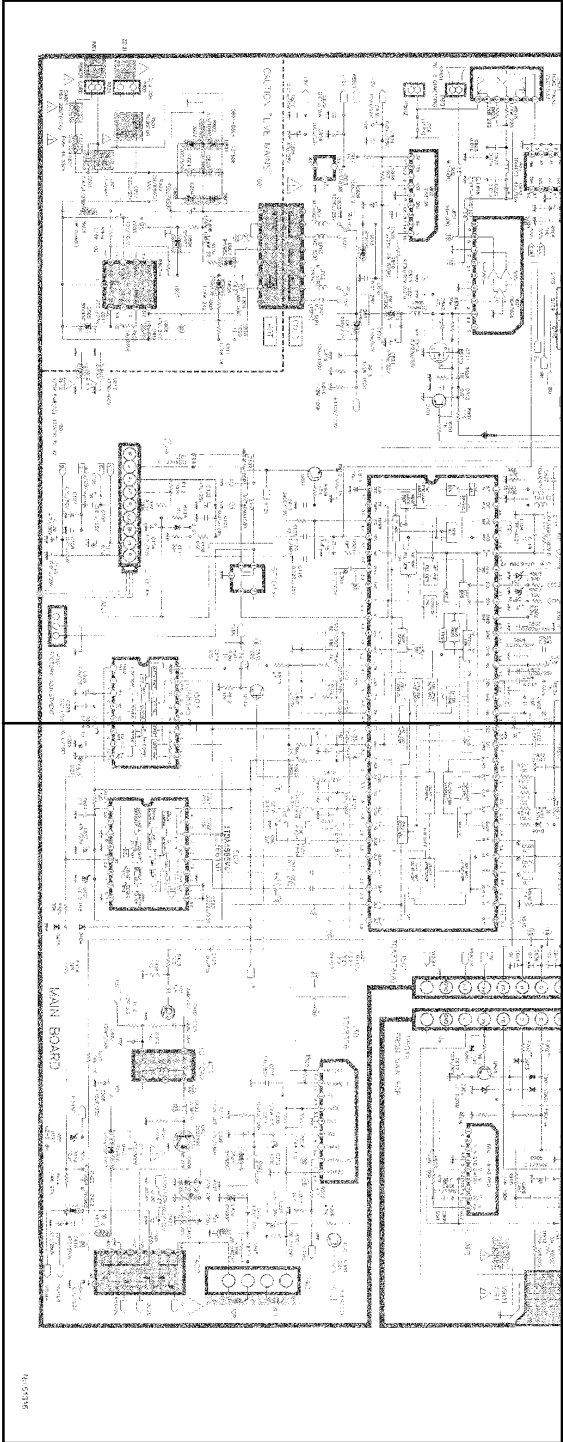

S.C.D(1)-b

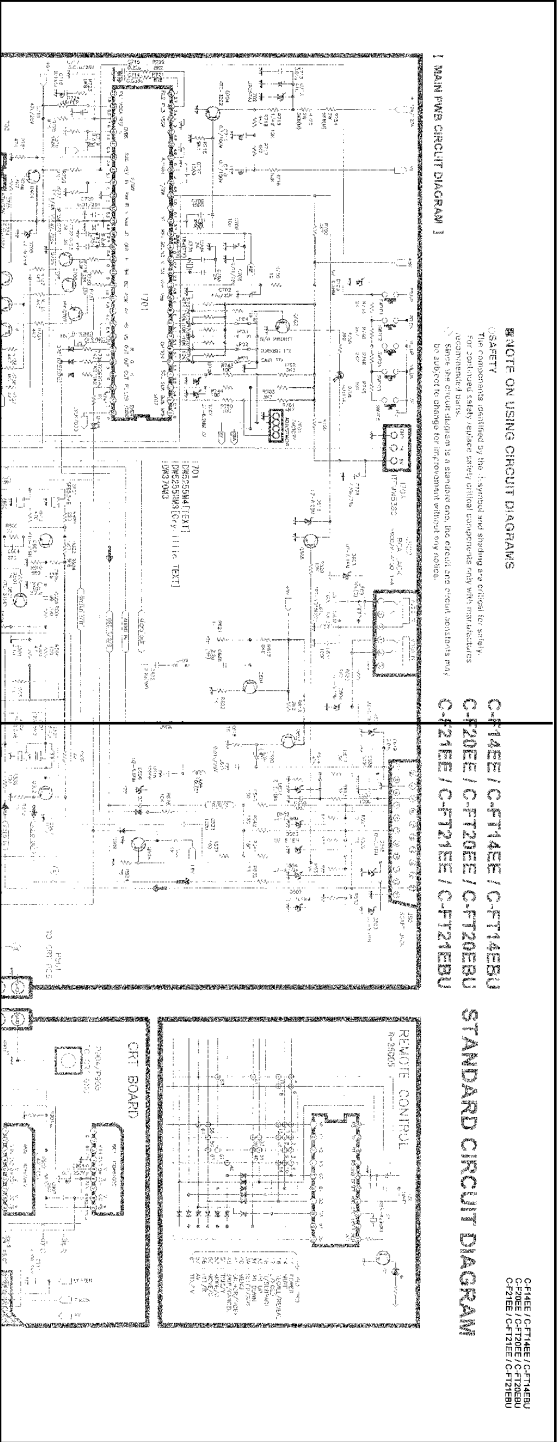


S.C.D(1)-c



S.C.D(1)-d



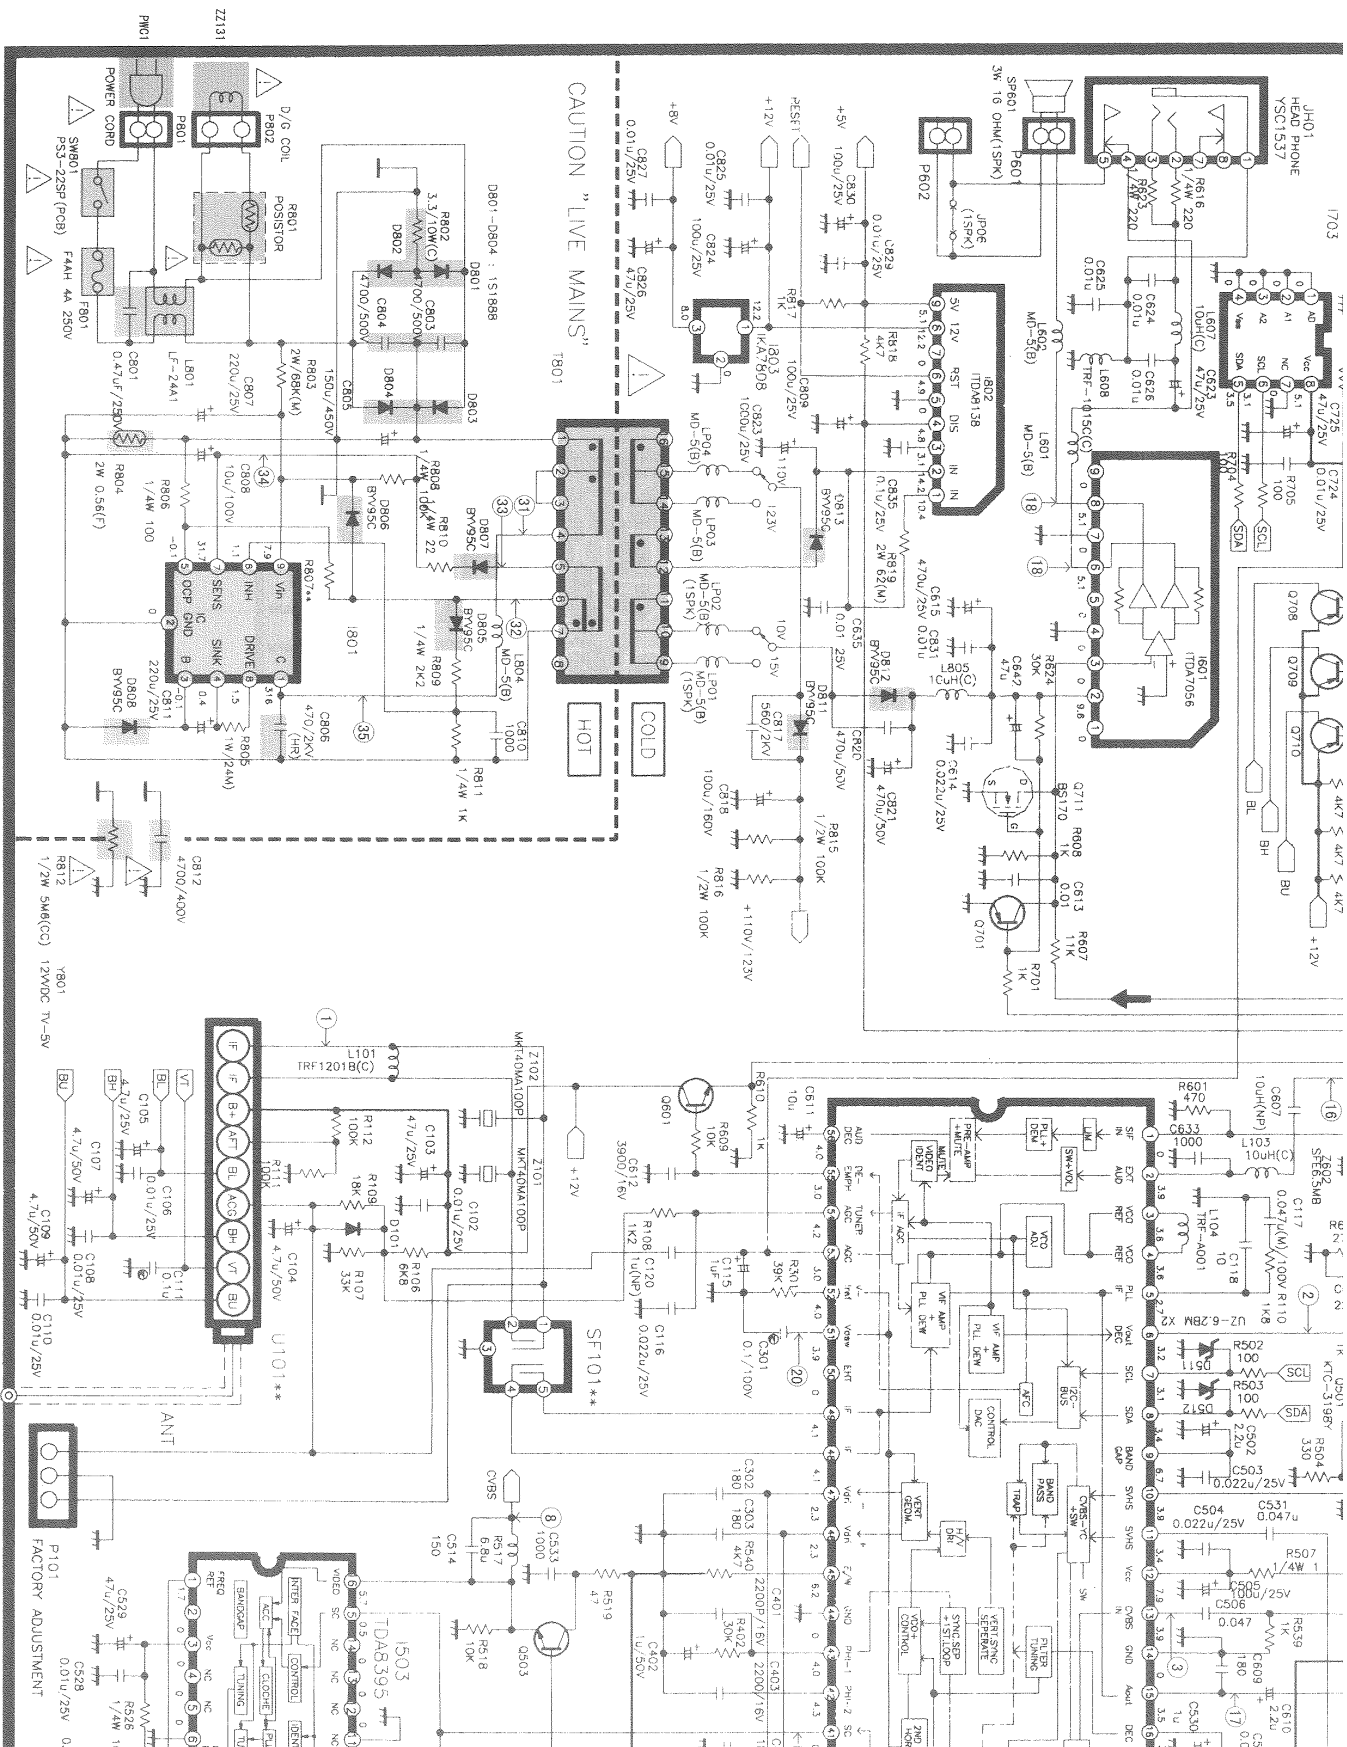




○ SAFETY





◇ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

C-F14EE / C-FT14EE / C-FT14EBU
C-F20EE / C-FT20EE / C-FT20EBU
C-F21EE / C-FT21EE / C-FT21EBU

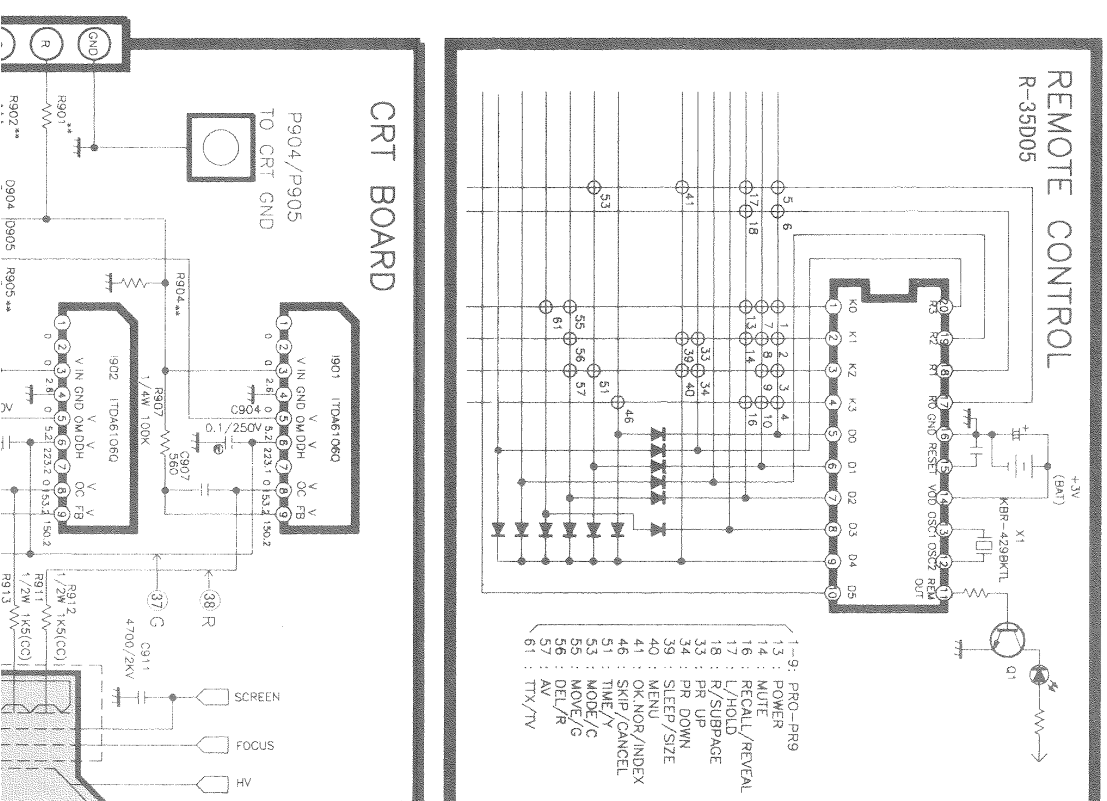

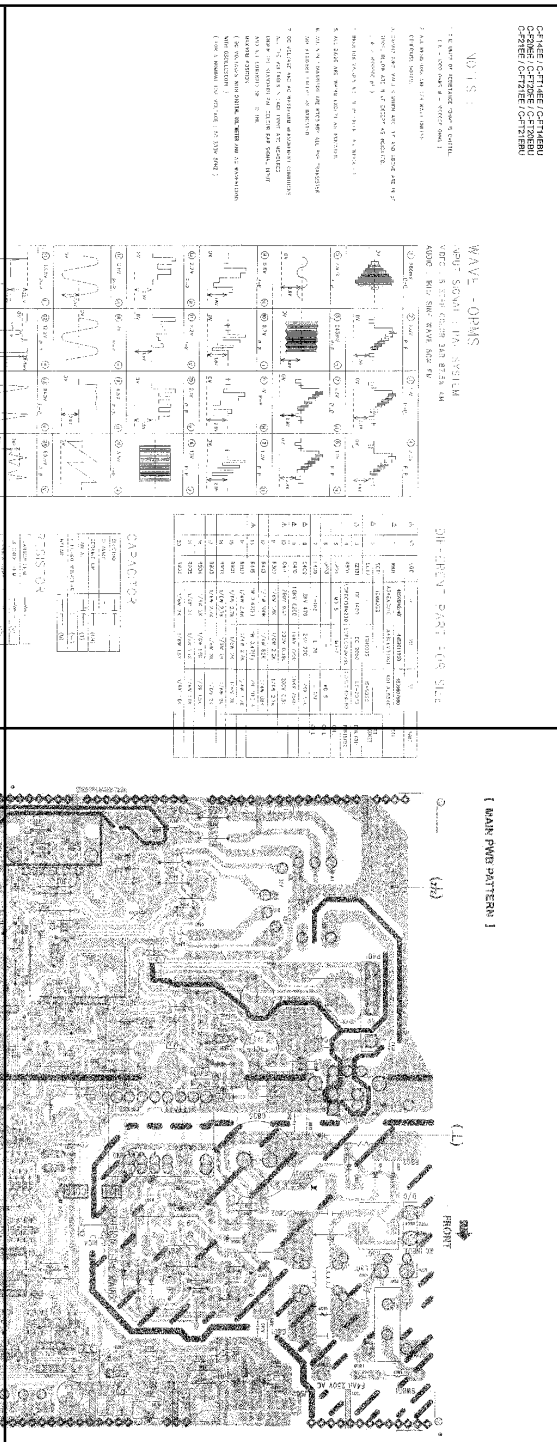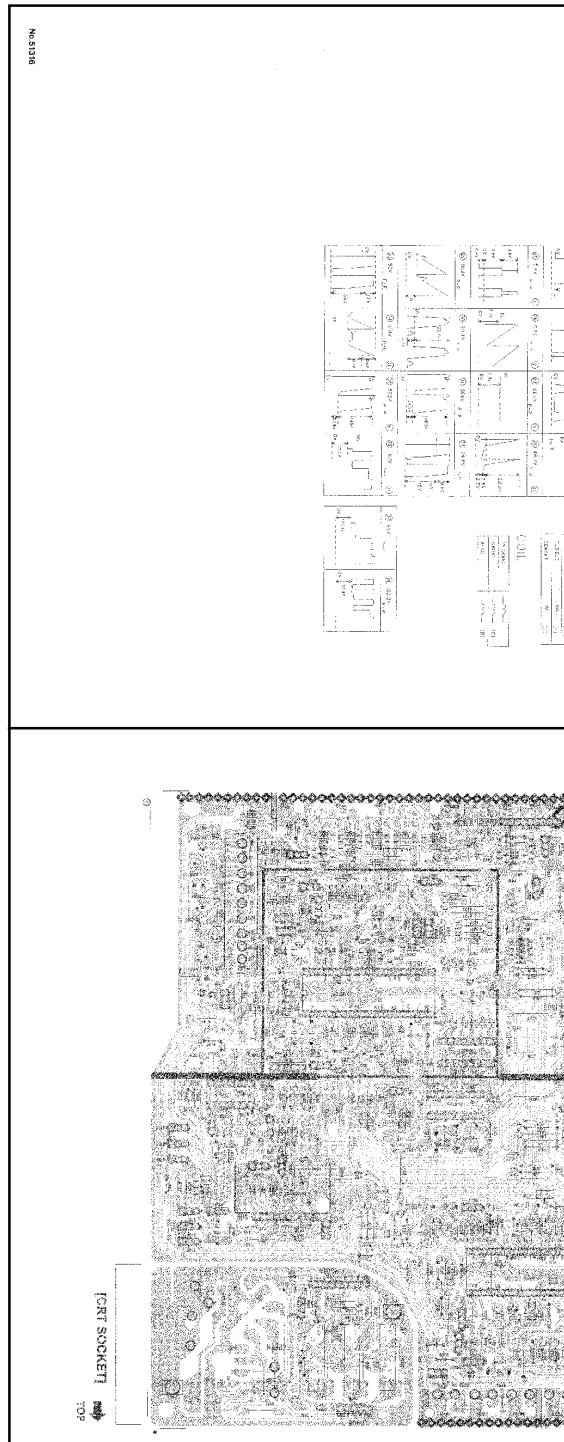
S.C.D(1)-d







M-OXIDE FILM		(M)
CARBON COMP		(CC)
FUSIBLE		(F)
CEMENT		(C)

COIL

PEAKING		(C)
CHOKE		(B)
BEAD		(B)

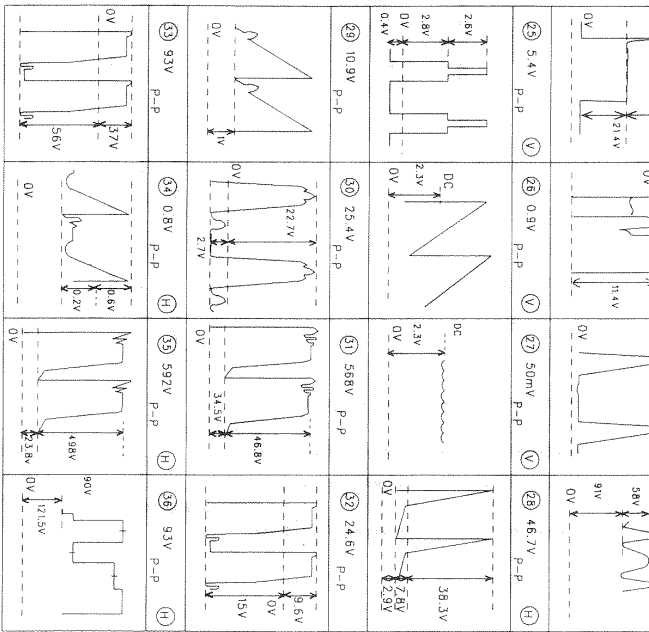

C-F14EE /C-FT14EE/C-FT14EBU
C-F20EE /C-FT20EE/C-FT20EBU
C-F21EE /C-FT21EE/C-FT21EBU

NOTES :


1. THE UNITS OF RESISTANCE "OHM" IS OMITTED.
(K = 1000 OHMS M = 100000 OHMS)
2. ALL RESISTORS ARE 1/6 WATT UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES WHICH ARE .10 AND ABOVE ARE IN P.F. THOSE BELOW ARE IN U.F EXCEPT AS INDICATED.
(U.F = 1000000 P.F)
4. INDUCTOR VALUES ARE IN UH EXCEPT AS INDICATED.
5. ALL DIODE ARE 1N4148 EXCEPT AS INDICATED.
6. ALL NPN TRANSISTOR ARE KTC3198Y ALL PNP TRANSISTOR ARE KIA266Y EXCEPT AS INDICATED.
7. DC VOLTAGE AND AC WAVEFORM MEASUREMENT CONDITIONS. ALL THE VOLTAGES IN EACH POINT ARE MEASURED UNDER THE STANDARD PAL COLOUR BAR SIGNAL INPUT AND ALL CONTROLS SET TO THE MAXIMUM POSITION.
(DC VOLTAGES WITH DIGITAL VOLTMETER AND AC WAVEFORMS WITH OSCILLOSCOPE)
(FOR A NOMINAL LINE VOLTAGE : AC 230V 50HZ)

WAVE FORMS

INPUT SIGNAL : PAL SYSTEM

VIDEO : 8 STEP COLOR BAR 87.5% AM

AUDIO : 1KHZ SINE WAVE 60% FM

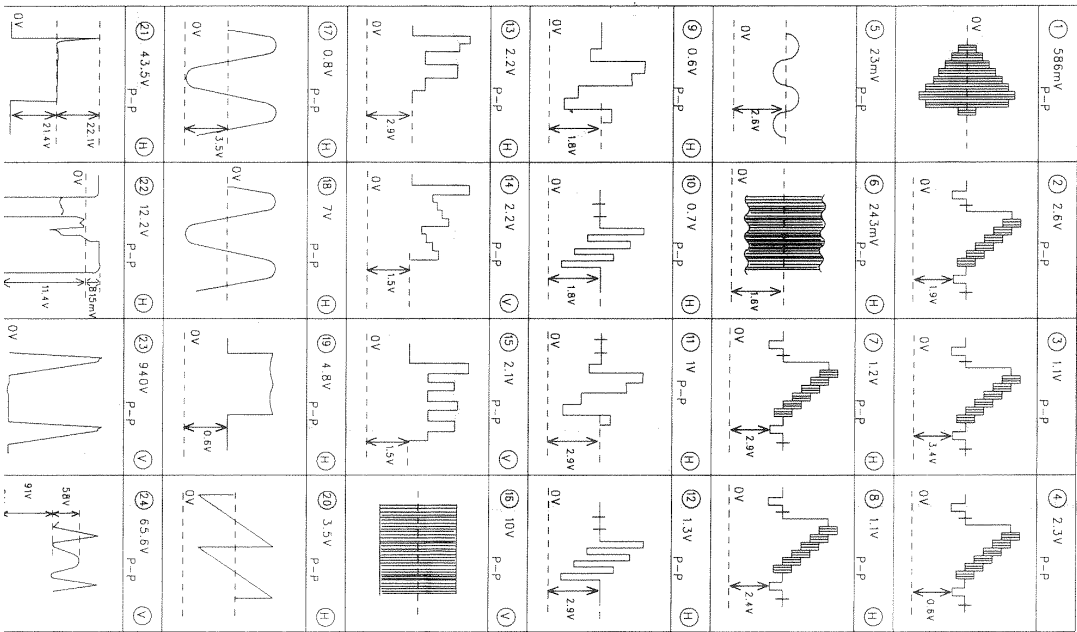

DIFFERENT PART FOR SIZE

Δ	NO.	LOC.	14"	20"	21"	NAME
Δ	1	V901	4859606240	4859611280	4859607860	ORT
			A34EAC01X	A48EY35X01	A51EAL55X01	
Δ	2	SC11	ISMA03S	-	-	ORT SOCKET
		SC12	-	ISHS09S	ISHS09S	
Δ	3	Z2131	DC-1450	DC-2050	DC-2070	DEG.COIL
		R801	ECPC180W290	ECPC180W290	ECPC140W290	POSISTOR
	4	LP04	MO-5	MO-5	-	COIL
	5	LP03	-	-	MO-5	COIL
	6	LP03	-	-	-	COIL
	7	L405	L-102	L-76	L-102	COIL
Δ	8	C409	2KV 470	2KV 220	2KV 470	
Δ	9	C410	1.8KV 6200	1.8KV 7200	1.8KV 7500	
Δ	10	C411	200V 0.51	200V 0.39u	200V 0.51	
	11	R302	1/6W 1.8K	1/6W 2.2K	1/6W 2.7K	
	12	R413	1/4W 100K	1/4W 82K	1/4W 68K	
Δ	13	R416	1W 0.47(F)	1W 0.47(F)	2W 3(F) A	
	14	R807	1/4W 2.4K	1/4W 2.7K	1/4W 2.7K	
	15	R901	1/6W 2.7K	1/6W 2K	1/6W 2K	
	16	R902	1/6W 2.7K	1/6W 2K	1/6W 2K	
	17	R903	1/6W 2.7K	1/6W 2K	1/6W 2K	
	18	R904	1/6W 2K	1/6W 1.5K	1/6W 1.5K	
	19	R905	1/6W 2K	1/6W 1.5K	1/6W 1.5K	
	20	R906	1/6W 2K	1/6W 1.5K	1/6W 1.5K	

CAPACITOR

ELECTRO	
CERAMIC	
CERAMIC CH	
TANTAL	
ELECTRO NONPOLAR	
MYLAR	

RESISTOR


CARBON FILM	
M-OXIDE FILM	
CARBON COMP	
FUSIBLE	



[illegible]

PARTS LIST

CAUTION

- The parts identified by the  symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety .
- The parts not indicated in this Parts List and those which are filled with lines — in the Parts No. columns will not be supplied .
- P. W. Board Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied .

ABBREVIATIONS OF RESISTORS,TRANSISTOR,CAPACITORS AND TOLERANCES

RESISTORS&TRANSISTOR		CAPACITORS	
C R	Carbon Resistor	CERA C	Ceramic Capacitor
V R	Variable Resistor	ELECTRO C	Electrolytic Capacitor
TR	Transistor	MYLAR C	Mylar Capacitor

TOLERANCES									
F	G	J	K	M	N	R	H	Z	P
± 1%	± 2%	± 5%	± 10%	± 20%	± 30%	+ 30% - 10%	+ 50% - 10%	+ 80% - 20%	+ 100% - 0%

■TELETEXT DIFFERENCE LIST

Non-TTX (C-F14EE,C-F20EE,C-F21EE)

I701	JP01	X701
1DW370M3	- (don't care)	5XE20R000E [20MHz]

[East Europe] TELETEXT (C-FT14EE,C-FT20EE,C-FT21EE)

I701	JP01	X701
1DW5255M4	OPEN	5XE18R000E [18MHz]


Cyrillic TELETEXT (C-FT14EBU,C-FT20EBU,C-FT21EBU)


I701	JP01	X701
1DW5255RM3	- (don't care)	5XE18R000E [18MHz]

DIFFERENCE OF PARTS LIST

△	LOC.	NAME	C-F14EE/FT14EE/FT14EBU	C-F20EE/FT20EE/FT20EBU	C-F21EE/FT21EE/FT21EBU
△	C409	CERA C	CCXB3D471K (2KV 470)	CCXB3D221K (2KV 220)	CCXB3D471K (2KV 470)
△	C410	MYLAR C	CMYH3C622J (1.6KV 6200)	CMYH3C722J (1.6KV 7200)	CMYH3C752J (1.6KV 7500)
△	C411	MYLAR C	CMYE2D514J (200V 0.51)	CMYE2D394J (200V 0.39)	CMYE2D514J (200V 0.51)
	L405	H-LINEARITY COIL	58H0000016 (L-102)	58H0000020 (L-76)	58H0000016 (L-102)
	LP03	BEAD COIL	--	--	5MC0000100 [MD-5(HC-3550)]
	LP04	BEAD COIL	5MC0000100 [MD-5(HC-3550)]	5MC0000100 [MD-5(HC-3550)]	--
	R302	C-FILM R	RD-AZ182J (1/6W 1.8K)	RD-AZ222J (1/6W 2.2K)	RD-AZ272J (1/6W 2.7K)
	R413	C-FILM R	RD-4Z823J (1/4W 82K)	RD-4Z823J (1/4W 82K)	RD-4Z683J (1/4W 68K)
△	R415	FUSIBLE R	RF01Z478J [1W 0.47(F)]	RF01Z478J [1W 0.47(F)]	RF01Z309JA [1W 3A(F)]
△	R801	POSISTOR	DEC180M290 (ECPCC180M290)	DEC180M290 (ECPCC180M290)	DEC140M290 (ECPCC140M290)
	R807	C-FILM R	RD-4Z242J (1/4W 2.4K)	RD-4Z272J (1/4W 2.7K)	RD-4Z272J (1/4W 2.7K)
	R901-3	C-FILM R	RD-AZ302J (1/6W 3K)	RD-AZ202J (1/6W 2K)	RD-AZ202J (1/6W 2K)
	R904-6	C-FILM R	RD-AZ202J (1/6W 2K)	RD-AZ162J (1/6W 1.6K)	RD-AZ162J (1/6W 1.6K)
△	SCT1	CRT SOCKET	4859303030 (ISMM03S)	--	--
△	SCT2	CRT SOCKET	--	4859302930 (ISHS09S)	4859302930 (ISHS09S)
△	V901	CRT(I.T.C.)	4859606240 (A34EAC01X)	4859611260 (A48EEV33X01)	4859607660 (A51EAL55X01)
△	ZZ131	DEGAUSSING COIL	58G0000084 (DC1450)	58G0000086 (DC2050)	58G0000074 (DC2070)
		SPEC PLATE	48664168ZZ19(C-F14EE) 48664168ZZ20(C-FT14EE) 48664168ZZ21(C-FT14EBU)	48664168ZZ22(C-F20EE) 48664168ZZ23(C-FT20EE) 48664168ZZ24(C-FT20EBU)	48664168ZZ25(C-F21EE) 48664168ZZ26(C-FT21EE) 48664168ZZ27(C-FT21EBU)

■ EXPLODED VIEW (C-F14EE/C-FT14EE/C-FT14EBU)

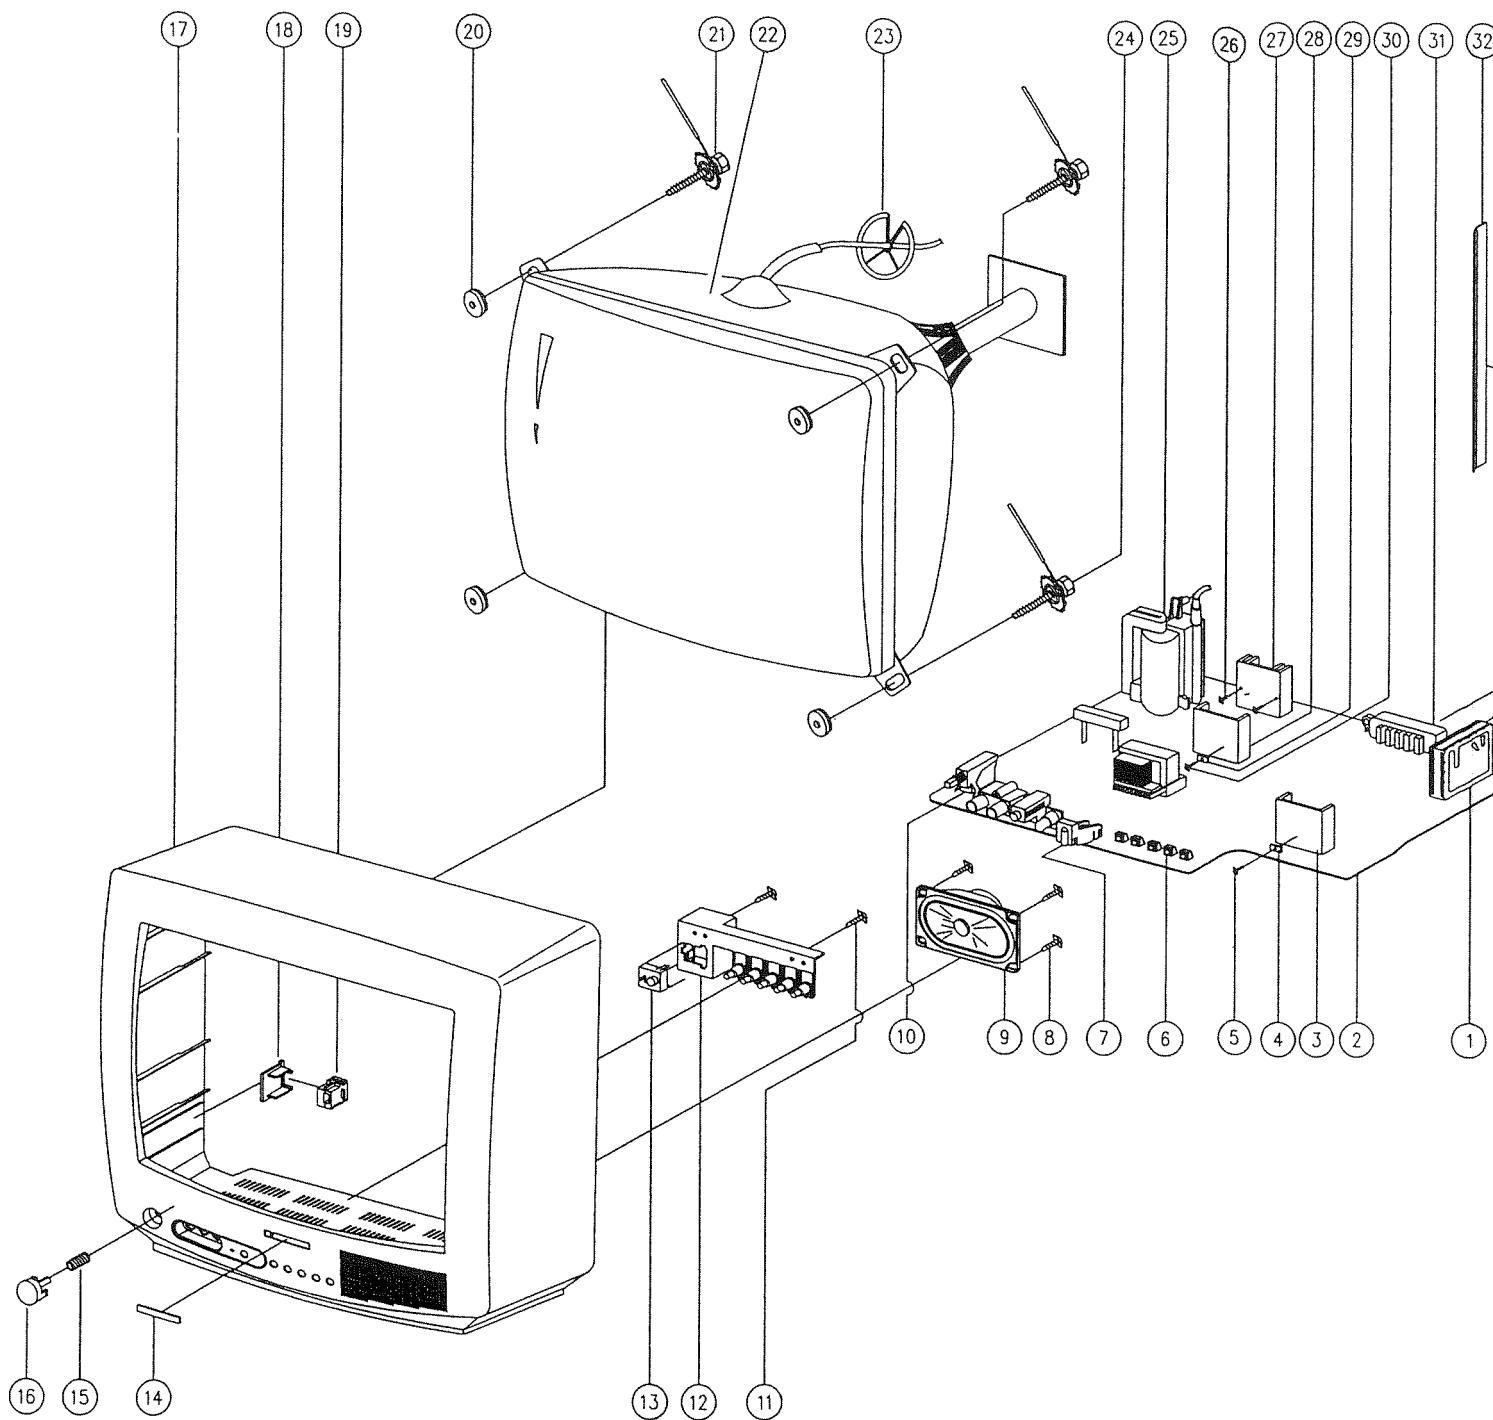


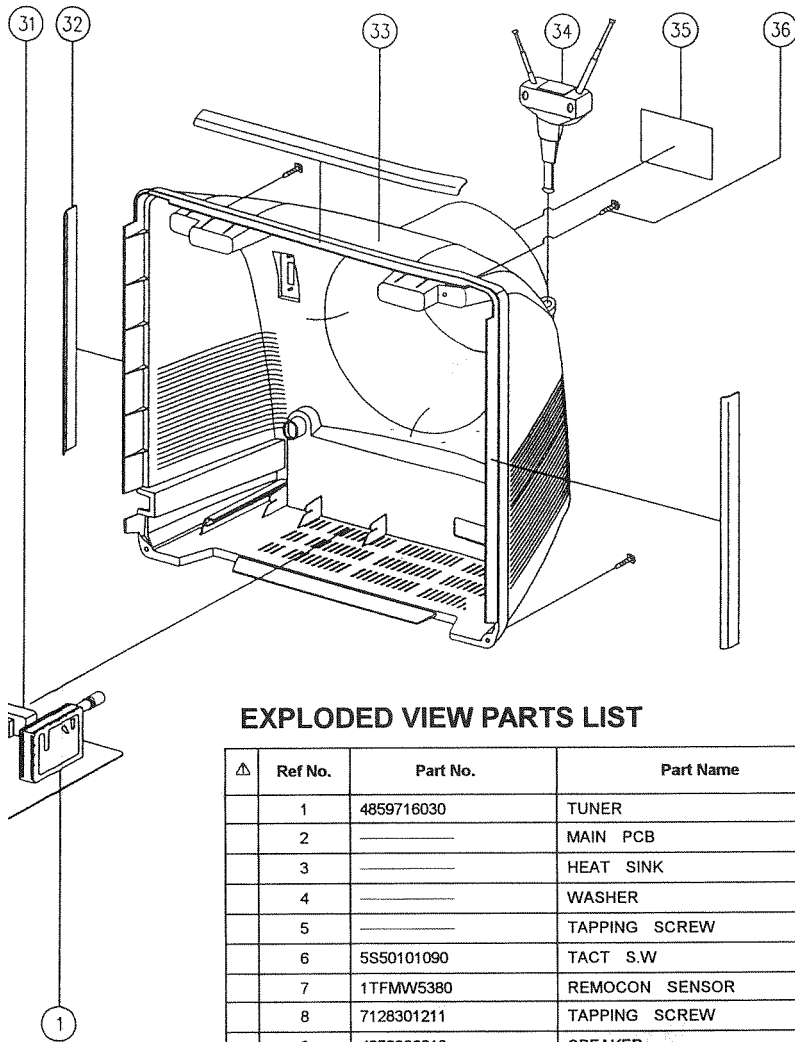


EXPLODED VIEW PARTS LIST

△	Ref No.	Part No.	Part Name	Description
	1	4859716030	TUNER	
	2	—	MAIN PCB	
	3	—	HEAT SINK	A1050P-H24 T2.0
	4	—	WASHER	SPCC T1.5
	5	—	TAPPING SCREW	T2S PAN 3×10 MFZN
	6	5S50101090	TACT S.W	(×5) SW701 ~ 705
	7	1TFMW5380	REMOCON SENSOR	I704
	8	7128301211	TAPPING SCREW	(×4) T2S WAS 3×12 MFZN
	9	4858306810	SPEAKER	SP01
△	10	5S40101143	PUSH S.W	SW801
	11	7128301211	TAPPING SCREW	(×3) T2S WAS 3×12 MFZN
	12	4854933301	CH BUTTON	ABS
	13	4855530900	REMOCON WINDOW	ACRYL
	14	48556136SS16	BRAND MARK	AL
	15	4856716000	SPRING COIL	SWPA φ0.5
	16	4854848701	POWER BUTTON	ABS
	17	4852061400	FRONT CABINET	HIPS
	18	4853533201	RETAINER BRACKET	HIPS
	19	97P2316600	CORD STOPPER	ABS
	20	4856215201	RUBBER WASHER	(×4) RUBBER
	21	4856013300	CRT FIX SCREW	(×2) L=80
△	22	4859606240	CRT (I.T.C.)	A34EAC01X
	23	4856814300	WIRE CLAMP	(×2) NYLON 66
	24	4856013301	CRT FIX SCREW	(×2) L=140
△	25	50H0000177	FBT	T402
	26	—	TAPPING SCREW	(×2) T2S PAN 3×10 MFZN
	27	—	HEAT SINK	AL EX
	28	—	HEAT SINK	AL T2.0
	29	—	WASHER	SPCC
	30	—	TAPPING SCREW	T2S PAN 3×10 MFZN
	31	4859200401	SCART SOCKET	JS01 21PIN EURO CONNECTOR
	32	4857817611	STICK SHEET	(×3) FELT T0.7 L=200
	33	4852148001	REAR COVER	HIPS
	34	4850A02310	ROD ANT	S3BW276B (L=400)
	35	48664168ZZ19	SPEC PLATE	C-F14EE
	35	48664168ZZ20	SPEC PLATE	C-FT14EE
	35	48664168ZZ21	SPEC PLATE	C-FT14EBU
	36	7122401611	TAPPING SCREW	(×4) T2S TRS 4×16 MFZN

EXPLODED VIEW (C-F20EE/C-FT20EE/C-FT20EBU)

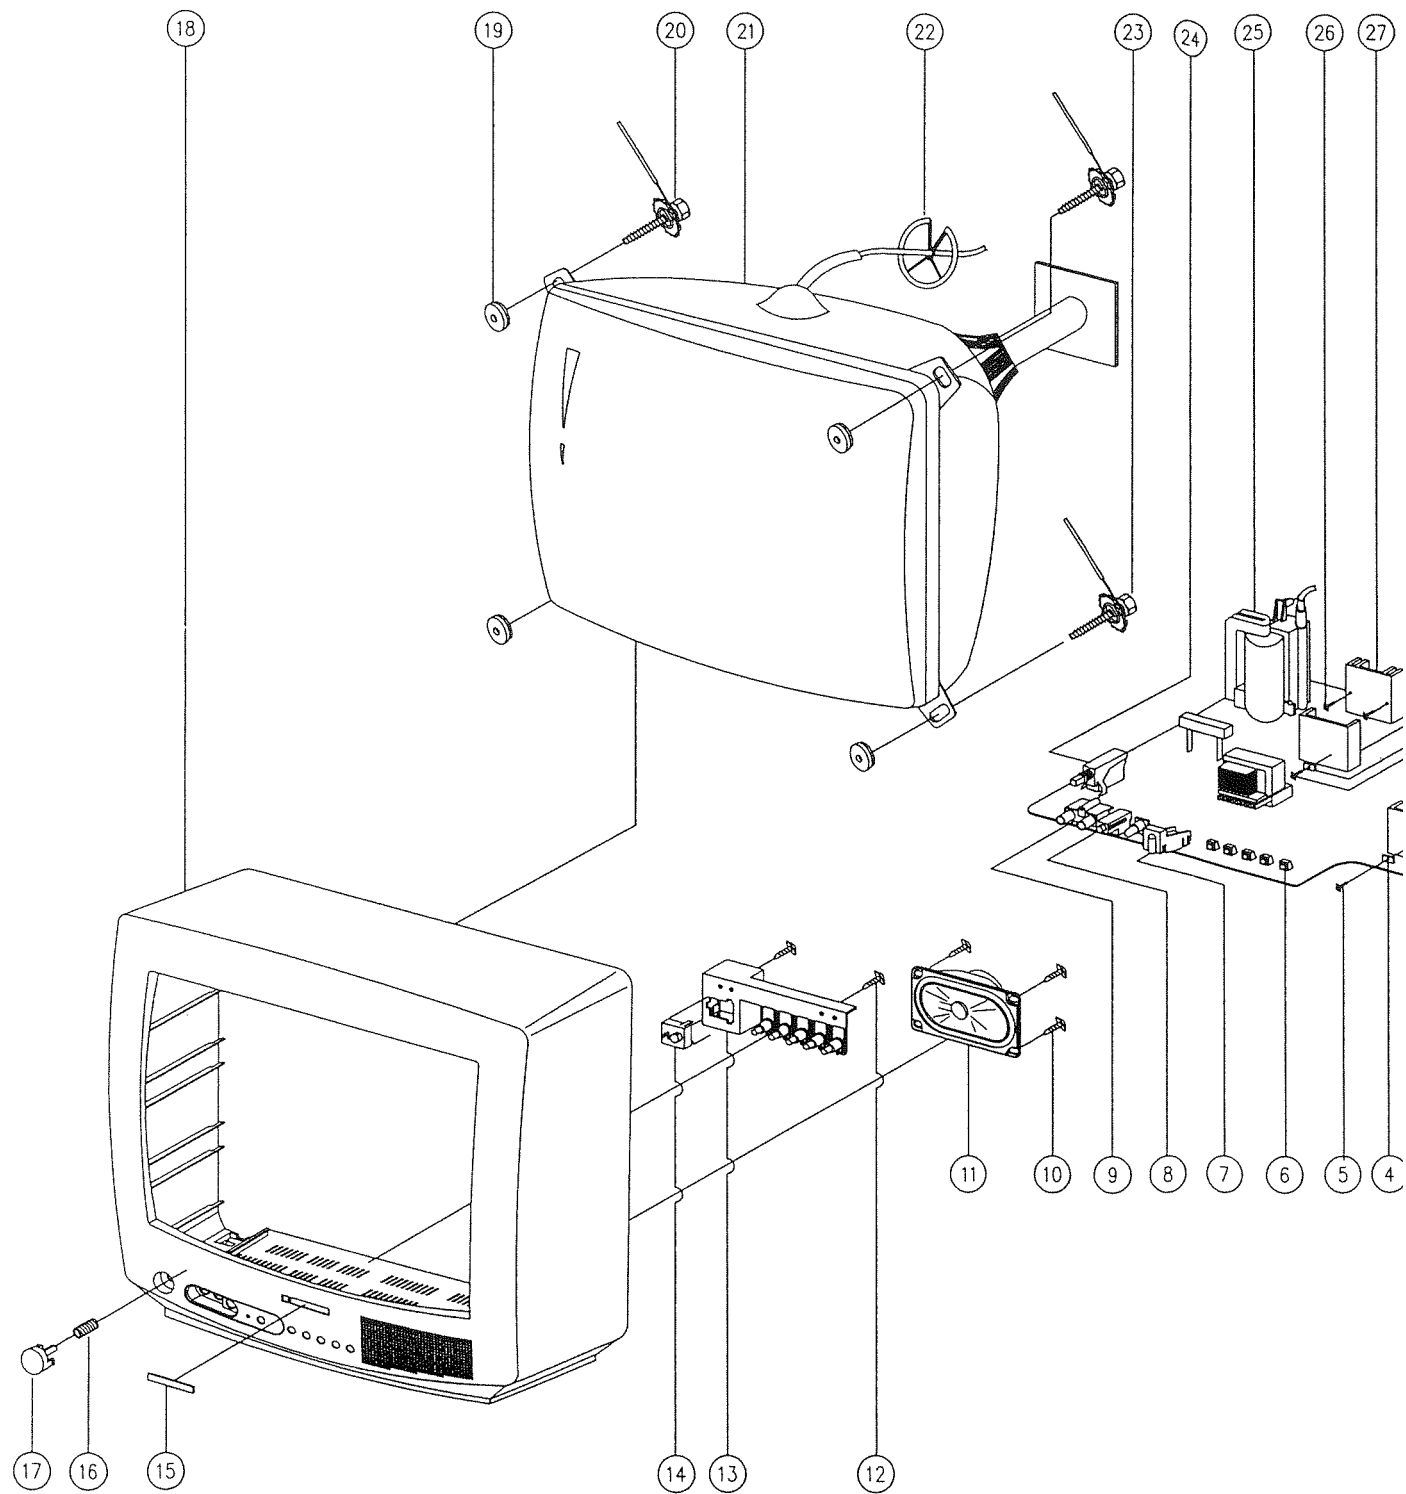


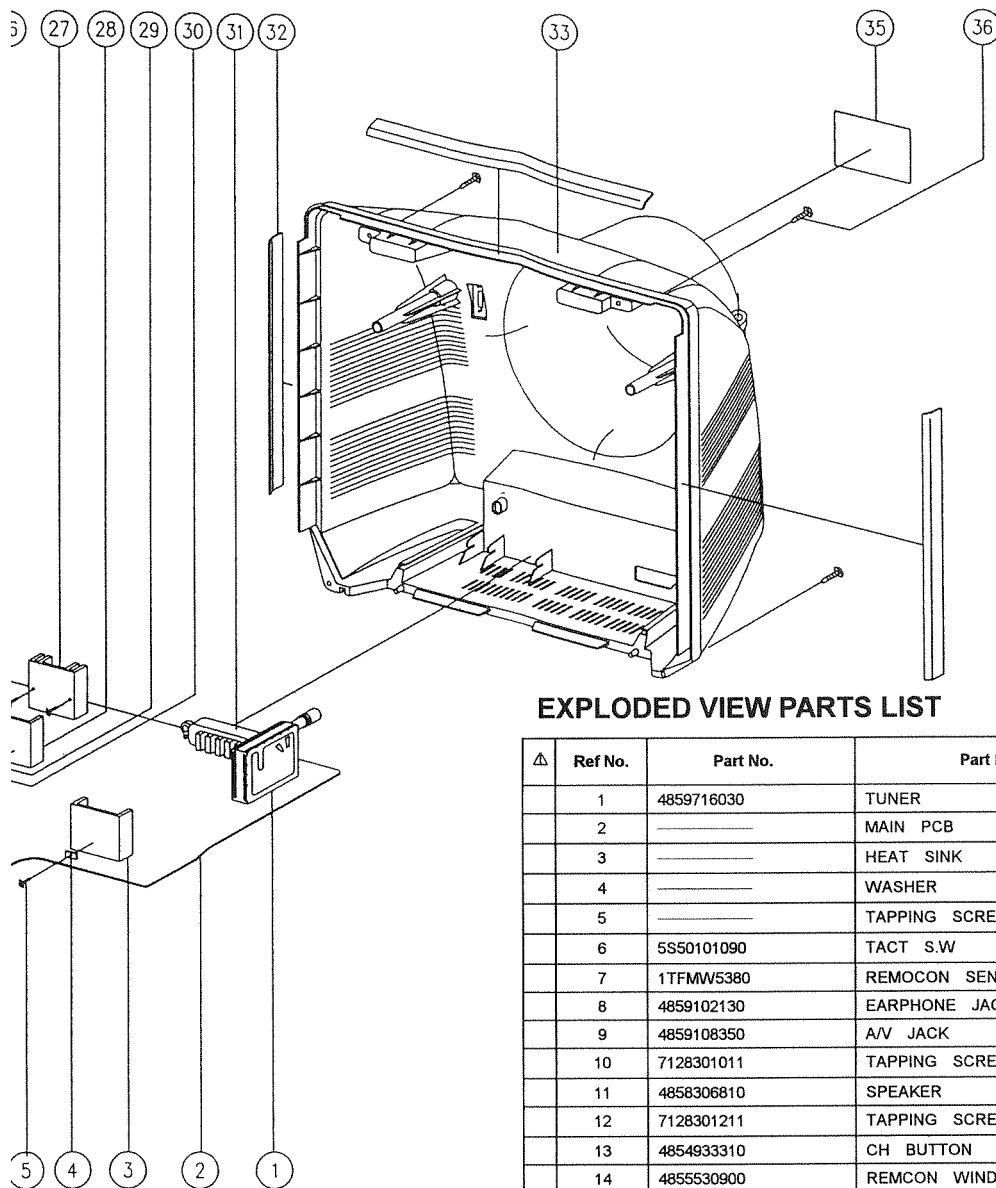


EXPLODED VIEW PARTS LIST

⚠	Ref No.	Part No.	Part Name	DESCRIPTION
	1	4859716030	TUNER	
	2	_____	MAIN PCB	
	3	_____	HEAT SINK	A1050P-H24 T2.0
	4	_____	WASHER	SPCC T1.5
	5	_____	TAPPING SCREW	T2S PAN 3×10 MFZN
	6	5S50101090	TACT S.W	(×5) SW701 ~ 705
	7	1TFMW5380	REMOCON SENSOR	I704
	8	4859102130	EARPHONE JACK	JH01
	9	4859108350	A/V JACK	JS02 YSC02P-4100-14A
	10	7128301011	TAPPING SCREW	(×4) T2S WAS 3×10 MFZN
	11	4858306810	SPEAKER	SP01
	12	7128301211	TAPPING SCREW	(×2) T2S WAS 3×12 MFZN
	13	4854933310	CH BUTTON	ABS
	14	4855530900	REMCON WINDOW	ACRYL
	15	48556159SS16	BRAND MARK	AL
	16	4856716000	COIL SPRING	SWPA φ0.5
	17	4854848700	POWER BUTTON	ABS
	18	4852061202	FRONT CABINET	HIPS
	19	4856215402	RUBBER WASHER	(×4) RUBBER
	20	4856013300	CRT FIX SCREW	(×2) L=80
⚠	21	4859611260	CRT (I.T.C)	A48EEV33X01
	22	4856814300	CLAMP WIRE	(×2) NYLON 66
	23	4856013302	CRT FIX SCREW	(×2) L=190
⚠	24	5S40101143	PUSH S.W	SW801
⚠	25	50H0000177	FBT	T402
	26	_____	TAPPING SCREW	(×2) T2S PAN 3×10 MFZN
	27	_____	HEAT SINK	AL EX
	28	_____	HEAT SINK	AL T2.0
	29	_____	WASHER	SPCC
	30	_____	TAPPING SCREW	T2S PAN 3×10 MFZN
	31	4859200401	SCART SOCKET	JS01 21PIN EURO CONNECTOR
	32	4857817611	STICK SHEET	(×3) FELT T0.7 L=200
	33	4852147804	REAR COVER	FR HIPS
	35	48664168ZZ22	SPEC PLATE	C-F20EE
	35	48664168ZZ23	SPEC PLATE	C-FT20EE
	35	48664168ZZ24	SPEC PLATE	C-FT20EBU
	36	7122401611	TAPPING SCREW	(×4) T2S TRS 4×16 MFZN

EXPLODED VIEW (C-F21EE/C-FT21EE/C-FT21EBU)

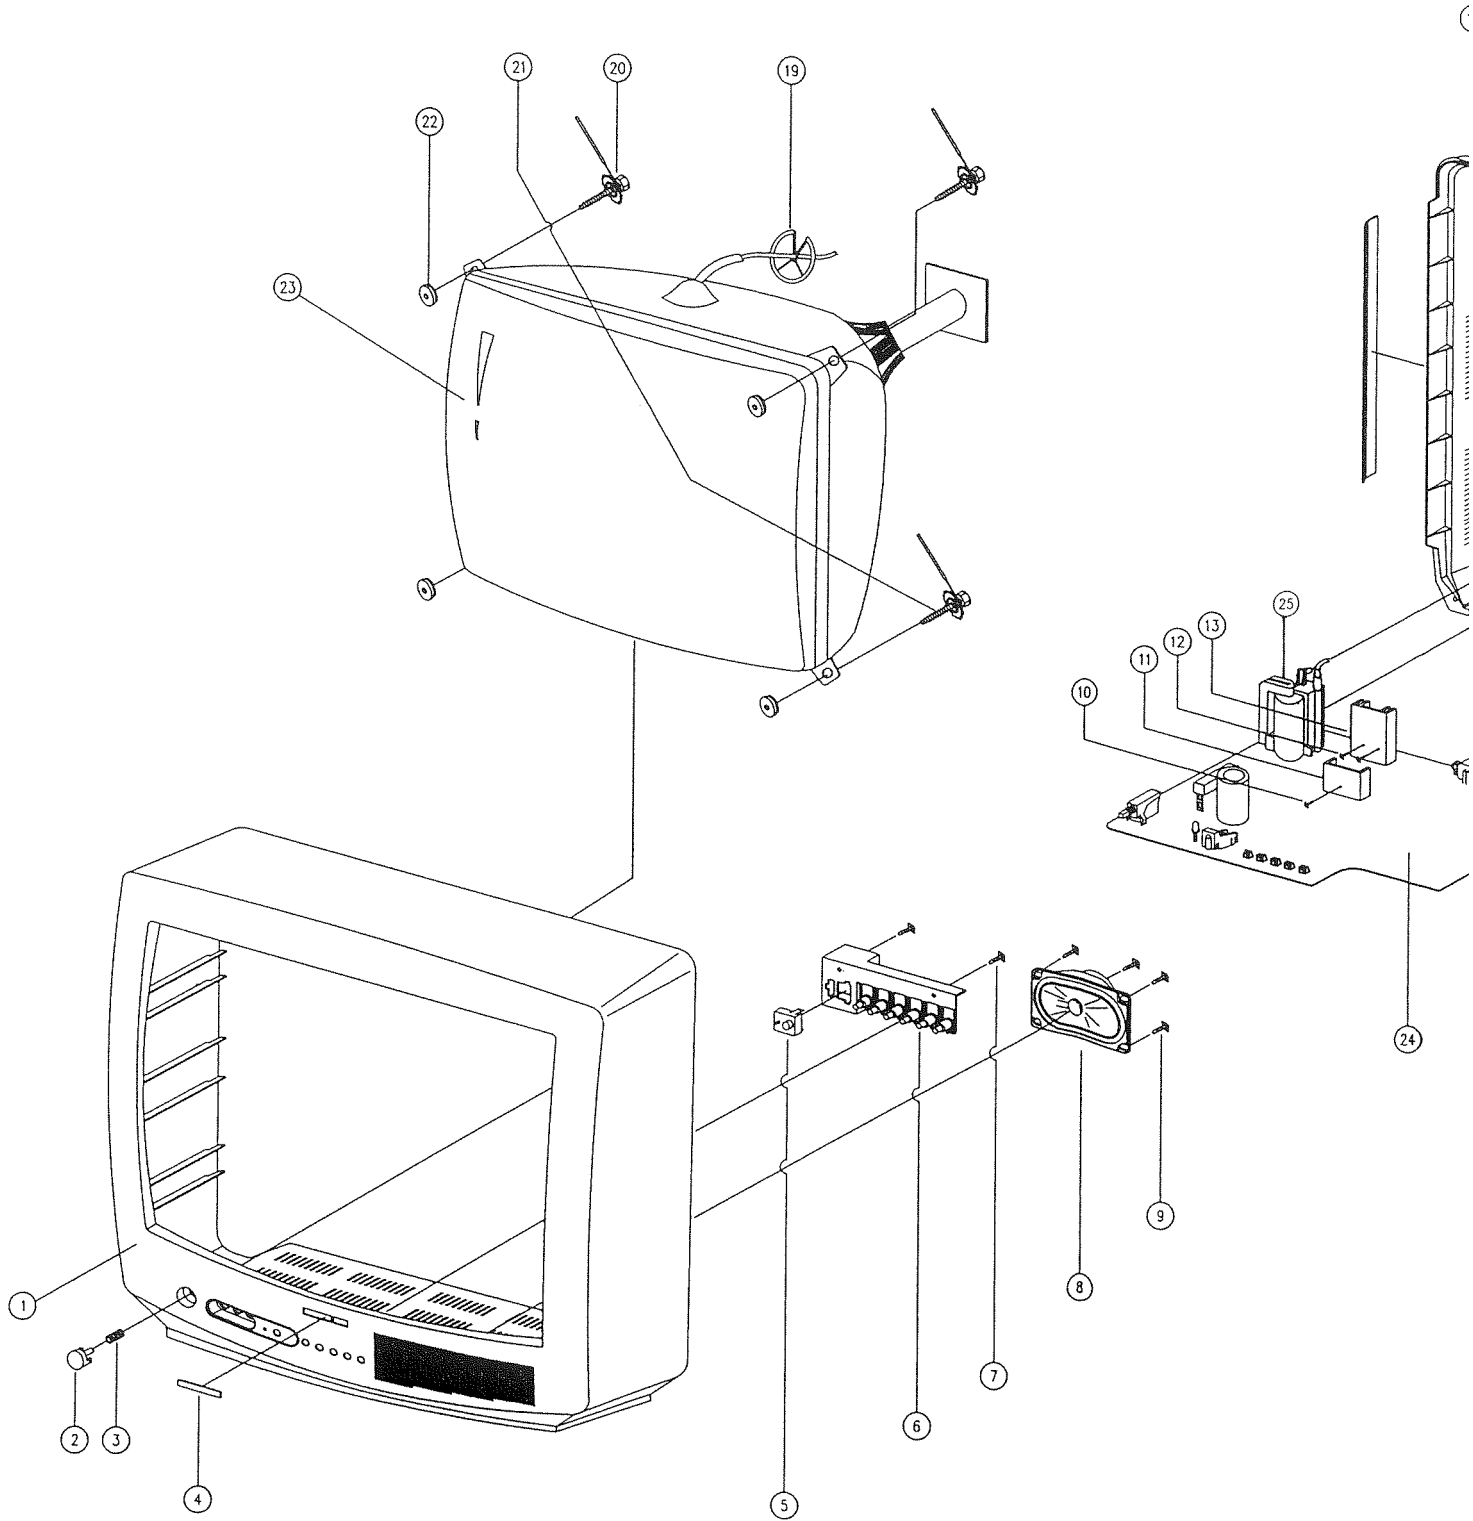

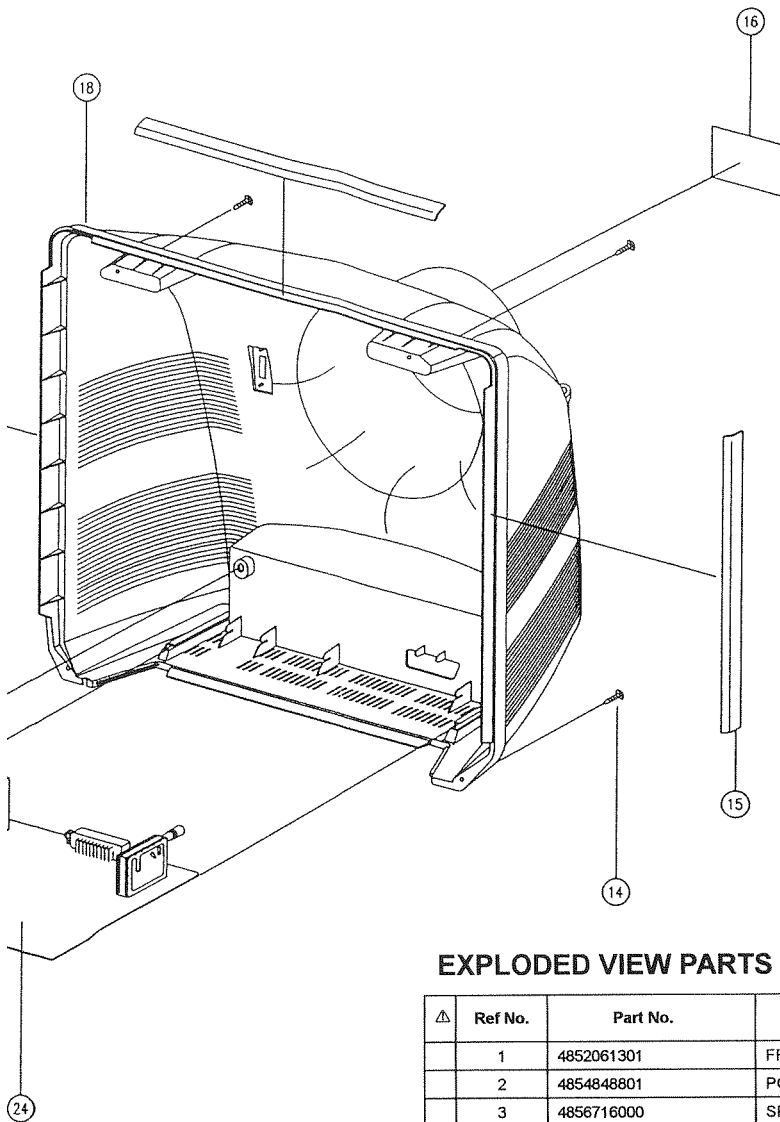

EXPLODED VIEW PARTS LIST

△	Ref No.	Part No.	Part Name	DESCRIPTION
	1	4852061301	FRONT CABINET	HIPS BK
	2	4854848801	POWER BUTTON	ABS BK
	3	4856716000	SPRING	SWPA PIE0.5
	4	48556159SS16	BRAND MARK	AL T1.0
	5	4855530900	REMOCON WINDOW	PMMA
	6	4854933301	BUTTON	ABS BK
	7	7128301211	TAPPING SCREW	(×2) T2S WAS 3×12 MFZN
	8	4858306810	SPEAKER	3W 16 OHM F2035C03-3
	9	7128301211	TAPPING SCREW	(×4) T2S WAS 3×12 MFZN
	10	_____	TAPPING SCREW	TT2 RND 3×8 MFZN
	11	_____	HEAT SINK	AL EX
	12	_____	TAPPING SCREW	(×2) TT2 RND 3×8 MFZN
	13	_____	HEAT SINK	AL EX
	14	7122401411	TAPPING SCREW	(×4) T2S TRS 4×14 MFZN
	15	4857817630	STICK SHEET	(×2) FELT T0.7 L=400
	16	48664168ZZ25	SPEC PLATE	C-F21EE
	16	48664168ZZ26	SPEC PLATE	C-FT21EE
	16	48664168ZZ27	SPEC PLATE	C-FT21EBU
	18	4852147900	REAR COVER	FR HIPS BK
	19	4856814300	WIRE CLAMP	(×2) NYLON66
	20	4856013300	CRT FIX SCREW AS	(×2) L=80 BK
	21	4856013302	CRT FIX SCREW AS	(×2) L=190 BK
	22	4856214902	RUBBER WASHER	(×4) CR T2
△	23	4859607660	CRT (I.T.C)	A51EAL55X01
	24	_____	MAIN PCB	
△	25	50H0000177	FBT	T402

■ ELECTRICAL PARTS LIST

△	LOC.	PART NO.	PART NAME	DESCRIPTION
		48B3435D05	TRANSMITTER REMOCON	R-35D05
		—	BATTERY	AAM 1.5V
△	ZZ131		COIL DEGAUSSING	Refer to Page 2-2
		48519A4610	CRT GROUND AS	1401H-1015-1P
△	V901		CRT	Refer to Page 2-2
	SP01	4858306810	SPEAKER	3W 16 OHM F2035C03-3
	C102	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C103	CEXF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
	C104	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
	C105	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
	C106	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C107	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
	C108	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C109	CEXF1H479V	C ELECTRO	50V RSS 4.7MF (5X11) TP
	C110	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C111	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C115	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
	C116	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C117	CMXM2A473J	C MYLAR	100V 0.047MF J (TP)
	C118	CZCH1H100J	C CERA	50V CH 10PF J (AXIAL)
	C120	CEXD1H109F	C ELECTRO	50V RND 1MF (5X11) TP
	C301	CMXB2A104J	C MYLAR	100V EU 0.1MF J (TP)
	C302	CCZB1H181K	C CERA	50V B 180PF K (AXIAL)
	C303	CCZB1H181K	C CERA	50V B 180PF K (AXIAL)
	C304	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C306	CBXF1H104Z	C CERA SEMI	50V F 0.1MF Z (TAPPING)
	C308	CEXF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP
	C309	CEXF2A470V	C ELECTRO	100V RSS 47MF (10X16) TP
	C311	CMXM2A103J	C MYLAR	100V 0.01MF J (TP)
	C312	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C401	CBZR1C222M	C CERA	16V Y5R 2200PF M (AXIAL)
	C402	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
	C403	CBZR1C222M	C CERA	16V Y5R 2200PF M (AXIAL)
	C404	CCZB1H181K	C CERA	50V B 180PF K (AXIAL)
	C406	CCZB1H222K	C CERA	50V B 2200PF K (TAPPING)
△	C409		C CERA	Refer to Page 2-2

△	LOC.	PART NO.	PART NAME	DESCRIPTION
△	C410		C MYLAR	Refer to Page 2-2
△	C411		C MYLAR	Refer to Page 2-2
	C412	CENF2C339V	C ELECTRO	160V RSS 3.3MF (8X16) TP
	C414	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)
	C415	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C416	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)
	C417	CENF2E330V	C ELECTRO	250V RSS 33MF (13X25) TP
	C418	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C419	CENF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
	C420	CXSL2H470J	C CERA	500V SL 47PF J (TAPPING)
	C421	CENF2C101V	C ELECTRO	160V RSS 100MF (16X25) TP
	C422	CCXB2H471K	C CERA	500V B 470PF K (TAPPING)
	C423	CENF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
	C424	CENF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
	C425	CENF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
	C501	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C502	CENF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
	C503	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C504	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C505	CENF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
	C506	CCZF1H473Z	C CERA	50V F 0.047MF Z (AXIAL)
	C507	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C508	CCZF1H473Z	C CERA	50V F 0.047MF Z (AXIAL)
	C509	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C510	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C511	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C512	CENF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
	C514	CCZB1H151K	C CERA	50V B 150PF K (AXIAL)
	C516	CENF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
	C517	CBZR1C472M	C CERA	16V Y5R 4700PF M (AXIAL)
	C518	CZCH1H180J	C CERA	50V CH 18PF J (AXIAL)
	C519	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C520	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C521	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C522	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C523	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C524	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C525	CENF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C526	CMXM2A104J	C MYLAR	100V 0.1MF J (TP)
	C527	CMNB1H224J	C MYLAR	50V EU 0.22MF J (TP)
	C528	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C529	CENF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C530	CENF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	C531	CCZF1H473Z	C CERA	50V F 0.047MF Z (AXIAL)
	C532	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C533	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C604	CCZB1H221K	C CERA	50V B 220PF K (AXIAL)
	C605	CZSL1H560J	C CERA	50V SL 56PF J (AXIAL)
	C606	CZSL1H680J	C CERA	50V SL 68PF J (AXIAL)
	C607	CEND1H100F	C ELECTRO	50V RND 10MF (8X11.5) TP
	C609	CCZB1H181K	C CERA	50V B 180PF K (AXIAL)
	C610	CEXF1H229V	C ELECTRO	50V RSS 2.2MF (5X11) TP
	C611	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
	C612	CBZR1C392M	C CERA	16V Y5R 3900PF M (AXIAL)
	C613	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C614	CCZF1E223Z	C CERA	25V F 0.022MF Z (AXIAL)
	C615	CENF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP
	C616	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C617	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C618	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C619	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C620	CEND1H229F	C ELECTRO	50V RND 2.2MF (5X11) TP
	C621	CEND1H229F	C ELECTRO	50V RND 2.2MF (5X11) TP
	C622	CEND1H229F	C ELECTRO	50V RND 2.2MF (5X11) TP
	C623	CENF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
	C624	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C625	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C626	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C631	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C632	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C633	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C634	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C635	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C636	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C637	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C638	CEND1H229F	C ELECTRO	50V RND 2.2MF (5X11) TP
	C642	CENF1E470V	C ELECTRO	25V RSS 47MF (5X11) TP
	C702	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C703	CZSL1H240J	C CERA	50V SL 24PF J (AXIAL)
	C704	CZSL1H240J	C CERA	50V SL 24PF J (AXIAL)
	C705	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C706	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
	C709	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C710	CMNM2A104J	C MYLAR	100V 0.1MF J (TP)
	C711	CMNM2A104J	C MYLAR	100V 0.1MF J (TP)
	C712	CEXF1H470V	C ELECTRO	50V RSS 47MF (6.3X11) TP

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	C713	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)
	C714	CMXB1H333J	C MYLAR	50V EU 0.033MF J (TP)
	C715	CMXB1H224J	C MYLAR	50V EU 0.22MF J (TP)
	C716	CMXB1H333J	C MYLAR	50V EU 0.033MF J (TP)
	C717	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C718	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C719	CMXB1H334J	C MYLAR	50V EU 0.33MF J (TP)
	C720	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C721	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C722	CXCH1H390J	C CERA	50V CH 39PF J (TAPPING)
	C723	CXCH1H360J	C CERA	50V CH 36PF J (TAPPING)
	C724	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C725	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
	C726	CEXF1C471V	C ELECTRO	16V RSS 470MF (10X12.5)TP
	C727	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
△	C801	CL1JB3474K	C LINE ACROSS	AC250V 0.47MF K
△	C803	CCXE2H472P	C CERA	500V E 4700PF P (TAPPING)
△	C804	CCXE2H472P	C CERA	500V E 4700PF P (TAPPING)
△	C805	CEYN2W151P	C ELECTRO	450V LHS 150MF (25X40)
△	C806	CCYR3D471K	C CERA	HIKR 2KV 470PF K 125C
	C807	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
	C808	CEXF2A100V	C ELECTRO	100V RSS 10MF (6.3X11) TP
	C809	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
	C810	CCZB1H102K	C CERA	50V B 1000PF K (AXIAL)
	C811	CEXF1E221V	C ELECTRO	25V RSS 220MF (8X11.5) TP
△	C812	CHIFFE472M	C CERA AC	4.0KV 4700PF M KD AC250V
	C817	CCYB3D561K	C CERA	2KV B 560PF K
	C818	CEXF2C101V	C ELECTRO	160V RSS 100MF (16X25) TP
	C821	CEXF1E471V	C ELECTRO	25V RSS 470MF (10X16) TP
	C823	CEXF1E102C	C ELECTRO	25V RUS 1000MF (13X20) TP
	C824	CEXF1E101C	C ELECTRO	25V RUS 100MF (6.3X11) TP
	C825	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C826	CEXF1C470C	C ELECTRO	16V RUS 47MF (5X11) TP
	C827	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C829	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C830	CEXF1C101C	C ELECTRO	16V RUS 100MF (6.3X11) TP
	C831	CCXF1H103Z	C CERA	50V F 0.01MF Z (TAPPING)
	C832	CCZF1E103Z	C CERA	25V F 0.01MF Z (AXIAL)
	C835	CBZF1H104Z	C CERA SEMI	50V F 0.1MF Z (AXIAL)
	C904	CMXL2E104K	C MYLAR	250V MEU 0.1MF K
	C905	CMXL2E104K	C MYLAR	250V MEU 0.1MF K
	C906	CMXL2E104K	C MYLAR	250V MEU 0.1MF K
	C907	CCXB1H561K	C CERA	50V B 560PF K (TAPPING)

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	C908	CCXB1H561K	C CERA	50V B 560PF K (TAPPING)
	C909	CCXB1H561K	C CERA	50V B 560PF K (TAPPING)
	C911	CCYB3D472K	C CERA	2KV B 4700PF K
	C912	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP 20", 21" only
	CN01	CXCH1H221J	C CERA	50V CH 220PF J (TAPPING)
	D101	D1N4148	DIODE	1N4148 (TAPPING)
△	D401	DBYV95C	DIODE	BYV95C (TAPPING)
△	D402	DBYV95C	DIODE	BYV95C (TAPPING)
△	D403	DBYV95C	DIODE	BYV95C (TAPPING)
	D404	D1N4148	DIODE	1N4148 (TAPPING)
	D405	D1N4148	DIODE	1N4148 (TAPPING)
	D406	D1N4148	DIODE	1N4148 (TAPPING)
△	D409	DBY228	DIODE	BY228 (TAPPING)
△	D420	DBYV95C	DIODE	BYV95C (TAPPING)
	D421	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D501	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D502	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D503	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D504	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D505	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D506	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D507	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D508	DMTZ5R6B	DIODE ZENER	MTZ 5.6-B (TAPPING)
	D509	D1N4148	DIODE	1N4148 (TAPPING)
	D510	D1N4148	DIODE	1N4148 (TAPPING)
	D511	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D512	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D513	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D601	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D602	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D603	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D604	DUZ5R1BM	DIODE ZENER	UZ-5.1BM
	D701	D1N4148	DIODE	1N4148 (TAPPING)
	D702	D1N4148	DIODE	1N4148 (TAPPING)
	D703	D1N4148	DIODE	1N4148 (TAPPING)
	D704	D1N4148	DIODE	1N4148 (TAPPING)
	D705	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D706	DKLR114L	LED	KLR114L
	D707	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D708	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
	D709	DUZ6R2BM	DIODE ZENER	UZ-6.2BM 6.2V
△	D801	D1S1888	DIODE	1S1888 (TAPPING)
△	D802	D1S1888	DIODE	1S1888 (TAPPING)

△	LOC.	PART NO.	PART NAME	DESCRIPTION
△	D803	D1S1888	DIODE	1S1888 (TAPPING)
△	D804	D1S1888	DIODE	1S1888 (TAPPING)
△	D805	DBYV95C	DIODE	BYV95C (TAPPING)
△	D806	DBYV95C	DIODE	BYV95C (TAPPING)
△	D807	DBYV95C	DIODE	BYV95C (TAPPING)
△	D808	DBYV95C	DIODE	BYV95C (TAPPING)
△	D811	DBYV95C	DIODE	BYV95C (TAPPING)
△	D812	DBYV95C	DIODE	BYV95C (TAPPING)
△	D813	DBYV95C	DIODE	BYV95C (TAPPING)
	D901	D1N4148	DIODE	1N4148 (TAPPING) 20", 21" only
	D902	DUZ6R2BM	DIODE ZENER	UZ-6, 2BM 6.2V 20", 21" only
	D903	D1N4148	DIODE	1N4148 (TAPPING) 20", 21" only
	D904	D1N4148	DIODE	1N4148 (TAPPING) 20", 21" only
	D905	D1N4148	DIODE	1N4148 (TAPPING) 20", 21" only
△	F801	5FSCB4022R	FUSE CERA	SEMKO F4AH 4A 250V MF51
	F801A	4857415001	CLIP FUSE	PFC5000-0702
	F801B	4857415001	CLIP FUSE	PFC5000-0702
	I301	1TDA8356	IC VERTICAL	TDA8356
	I501	1TDA8374A	IC VCD	TDA8374A
	I502	1TDA4665V4	IC DELAY	TDA4665/V4
	I503	TDA8395	IC	
	I601	1TDA7056	IC	TDA7056
	I701	1DW5255M4	IC MICOM	DW5255M4 East Europe TTX
		1DW5255RM3	IC MICOM	DW5255RM3 Cryrillic TTX
		1DW370M3	IC MICOM	DW370M3 Non-TTX
	I702	UPC574J	IC	
	I703	124LC08B	IC MEMORY	24LC08B
	I704	1TFMW5380	IC PREAMP	TFMW5380
△	I801	1STRS5707	IC POWER	STR-S5707
	I802	1TDA8138	IC REGULATOR	TDA8138
	I803	1KA7808	IC REGULATOR	KA7808
	I901	1TDA6106Q	IC AMP	TDA6106Q
	I902	1TDA6106Q	IC AMP	TDA6106Q
	I903	1TDA6106Q	IC AMP	TDA6106Q
	JH01	4859102130	JACK EARPHONE	YSC-1537
	JS01	4859200401	SOCKET RGB	SR-21A1 (ANGLE TYPE) [SCRAT JACK]
	JS02	4859108350	JACK PIN BOARD	YSC02P-4100-14A [PCA JACK]
	L101	58C9780027	COIL CHOKE	TRF-1201B (0.97 UH)
	L103	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L104	58E0000S37	COIL AFT	TRF-A001
	L301	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L302	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L401	5CPZ109M02	COIL PEAKING	1UH M (AXIAL 3.5MM)

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	L402	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	L405		COIL H-LINEARITY	Refer to Page 2-2
	L406	58C9430599	COIL CHOKE	AZ-9004Y(94MH)
	L501	5CPZ569K02	COIL PEAKING	5.6UH K (AXIAL 3.5MM)
	L601	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	L602	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	L604	5CPZ829K02	COIL PEAKING	8.2UH K (AXIAL 3.5MM)
	L605	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L606	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L607	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L608	58C6R8J067	COIL CHOKE	TRF-1015C (6.8UH J)
	L609	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	L610	58C6R8J067	COIL CHOKE	TRF-1015C (6.8UH J)
	L701	5CPZ689K02	COIL PEAKING	6.8UH K (AXIAL 3.5MM)
△	L801	5PLF24A1	FILTER LINE	LF-24A1
	L802	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	L803	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	L804	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	L805	5CPZ100K04	COIL PEAKING	10UH 10.5MM K (LAL04TB)
	LP02	5MC0000100	COIL BEAD	MD-5 (HC-3550)
	LP04		COIL BEAD	Refer to Page 2-2
△	PWC1	4859902910	CORD POWER AS	KKP419C+BL102NG+TUBE=2100
	Q301	TKTC3198Y	TR	KTC3198Y
△	Q401	T2SD2499	TR	2SD2499
△	Q402	T2SD1207T	TR	2SD1207-T (TAPPING)
	Q501	TKTC3198Y	TR	KTC3198Y
	Q502	TKTC3198Y	TR	KTC3198Y
	Q503	TKTC3198Y	TR	KTC3198Y
	Q504	TKTA1266Y	TR	KTA1266Y (TP)
	Q505	TKTC3198Y	TR	KTC3198Y
	Q601	TKTC3198Y	TR	KTC3198Y
	Q602	TKTC3198Y	TR	KTC3198Y
	Q603	TKTC3198Y	TR	KTC3198Y
	Q604	TKTC3198Y	TR	KTC3198Y
	Q701	TKTA1266Y	TR	KTA1266Y (TP)
	Q704	TKTC3202Y	TR	KTC3202Y (TP)
	Q705	TKTC3198Y	TR	KTC3198Y
	Q706	TKTC3198Y	TR	KTC3198Y
	Q707	TKTC3198Y	TR	KTC3198Y
	Q708	TKTA1266Y	TR	KTA1266Y (TP)
	Q709	TKTA1266Y	TR	KTA1266Y (TP)
	Q710	TKTA1266Y	TR	KTA1266Y (TP)
	Q711	TBS170	FET	BS170

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	Q802	TKTC3198Y	TR	KTC3198Y
	Q804	TKTC3198Y	TR	KTC3198Y
	Q901	TKTA1266Y	TR	KTA1266Y (TP) 20", 21" only
	R106	RD-AZ682J	R CARBON FILM	1/6 6.8K OHM J
	R107	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
	R108	RD-AZ122J	R CARBON FILM	1/6 1.2K OHM J
	R109	RD-AZ183J	R CARBON FILM	1/6 18K OHM J
	R110	RD-AZ182J	R CARBON FILM	1/6 1.8K OHM J
	R111	RD-AZ104J	R CARBON FILM	1/6 100K OHM J
	R112	RD-AZ104J	R CARBON FILM	1/6 100K OHM J
	R301	RD-AZ393J	R CARBON FILM	1/6 39K OHM J
	R302		R CARBON FILM	Refer to Page 2-2
	R304	RD-4Z189J	R CARBON FILM	1/4 1.8 OHM J
	R305	RD-4Z189J	R CARBON FILM	1/4 1.8 OHM J
	R307	RS02Z271J	R M-OXIDE FILM	2W 270 OHM J (TAPPING)
	R308	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R309	RD-AZ223J	R CARBON FILM	1/6 22K OHM J
	R310	RD-4Z473J	R CARBON FILM	1/4 47K OHM J
	R311	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R312	RD-AZ479J	R CARBON FILM	1/6 4.7 OHM J
	R401	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R402	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
	R403	RD-AZ479J	R CARBON FILM	1/6 4.7 OHM J
	R404	RD-AZ152J	R CARBON FILM	1/6 1.5K OHM J
	R405	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R406	RD-AZ272J	R CARBON FILM	1/6 2.7K OHM J
	R408	RS02Z561J	R M-OXIDE FILM	2W 560 OHM J (TAPPING)
	R409	RD-4Z103J	R CARBON FILM	1/4 10K OHM J
	R410	RD-2Z399J	R CARBON FILM	1/2 3.9 OHM J
	R411	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R412	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R413		R CARBON FILM	Refer to Page 2-2
	R414	RD-4Z273J	R CARBON FILM	1/4 27K OHM J
△	R415		R FUSIBLE	Refer to Page 2-2
	R416	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
	R417	RD-4Z102J	R CARBON FILM	1/4 1K OHM J
	R418	RD-AZ124J	R CARBON FILM	1/6 120K OHM J
	R420	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R501	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R502	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R503	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R504	RD-AZ331J	R CARBON FILM	1/6 330 OHM J
	R505	RD-AZ470J	R CARBON FILM	1/6 47 OHM J


△	LOC.	PART NO.	PART NAME	DESCRIPTION
	R506	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R507	RD-4Z109J	R CARBON FILM	1/4 1 OHM J
	R508	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R509	RD-AZ121J	R CARBON FILM	1/6 120 OHM J
	R510	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R511	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R512	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R513	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R514	RD-AZ104J	R CARBON FILM	1/6 100K OHM J
	R515	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R516	RD-AZ564J	R CARBON FILM	1/6 560K OHM J
	R517	5CPZ689K02	COIL PEAKING	6.8UH K (AXIAL 3.5MM)
	R518	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R519	RD-AZ470J	R CARBON FILM	1/6 47 OHM J
	R520	RD-AZ394J	R CARBON FILM	1/6 390K OHM J
	R521	RD-AZ513J	R CARBON FILM	1/6 51K OHM J
	R524	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
	R525	RD-AZ121J	R CARBON FILM	1/6 120 OHM J
	R526	RD-4Z100J	R CARBON FILM	1/4 10 OHM J
	R527	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R528	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R529	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R530	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R531	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R532	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R533	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R534	RD-AZ750J	R CARBON FILM	1/6 75 OHM J
	R535	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R536	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R537	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R538	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R539	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R540	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R541	RD-AZ151J	R CARBON FILM	1/6 150 OHM J
	R542	RD-AZ151J	R CARBON FILM	1/6 150 OHM J
	R543	RD-AZ151J	R CARBON FILM	1/6 150 OHM J
	R601	RD-AZ471J	R CARBON FILM	1/6 470 OHM J
	R602	RD-AZ561J	R CARBON FILM	1/6 560 OHM J
	R603	RD-AZ681J	R CARBON FILM	1/6 680 OHM J
	R604	RD-AZ562J	R CARBON FILM	1/6 5.6K OHM J
	R605	RD-AZ270J	R CARBON FILM	1/6 27 OHM J
	R606	RD-AZ391J	R CARBON FILM	1/6 390 OHM J
	R607	RD-AZ113J	R CARBON FILM	1/6 11K OHM J

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	R608	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R609	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R610	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R611	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R612	RD-AZ153J	R CARBON FILM	1/6 15K OHM J
	R613	RD-AZ153J	R CARBON FILM	1/6 15K OHM J
	R614	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
	R615	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R616	RD-4Z221J	R CARBON FILM	1/4 220 OHM J
	R617	RD-AZ682J	R CARBON FILM	1/6 6.8K OHM J
	R618	RD-AZ222J	R CARBON FILM	1/6 2.2K OHM J
	R619	RD-AZ471J	R CARBON FILM	1/6 470 OHM J
	R620	RD-AZ221J	R CARBON FILM	1/6 220 OHM J
	R621	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R622	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R623	RD-4Z221J	R CARBON FILM	1/4 220 OHM J
	R624	RD-AZ303J	R CARBON FILM	1/6 30K OHM J
	R639	RD-AZ222J	R CARBON FILM	1/6 2.2K OHM J
	R701	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R702	RD-AZ332J	R CARBON FILM	1/6 3.3K OHM J
	R703	RD-AZ332J	R CARBON FILM	1/6 3.3K OHM J
	R704	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R705	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R706	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R707	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R708	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R709	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R710	RD-AZ100J	R CARBON FILM	1/6 10 OHM J
	R711	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
	R714	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R715	RD-AZ912J	R CARBON FILM	1/6 9.1K OHM J
	R716	RD-AZ823J	R CARBON FILM	1/6 82K OHM J
	R717	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R718	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R719	RD-4Z103J	R CARBON FILM	1/4 10K OHM J
	R720	RS02Z562J	R M-OXIDE FILM	2W 5.6K OHM J (TAPPING)
	R721	RD-AZ682J	R CARBON FILM	1/6 6.8K OHM J
	R722	RD-AZ822J	R CARBON FILM	1/6 8.2K OHM J
	R723	RD-AZ682J	R CARBON FILM	1/6 6.8K OHM J
	R724	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
	R725	RD-AZ913J	R CARBON FILM	1/6 91K OHM J
	R727	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R728	RD-4Z100J	R CARBON FILM	1/4 10 OHM J


△	LOC.	PART NO.	PART NAME	DESCRIPTION
	R729	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
	R730	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
	R731	RD-AZ333J	R CARBON FILM	1/6 33K OHM J
	R732	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R733	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R734	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R735	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R736	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R737	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R738	RD-AZ122J	R CARBON FILM	1/6 1.2K OHM J
	R739	RD-AZ122J	R CARBON FILM	1/6 1.2K OHM J
	R740	RD-AZ122J	R CARBON FILM	1/6 1.2K OHM J
	R741	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
	R743	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R744	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R745	RD-AZ103J	R CARBON FILM	1/6 10K OHM J
	R746	RD-AZ272J	R CARBON FILM	1/6 2.7K OHM J
	R748	RD-AZ622J	R CARBON FILM	1/6 6.2K OHM J
	R749	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R750	RD-AZ101J	R CARBON FILM	1/6 100 OHM J
	R751	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
	R753	RD-AZ202J	R CARBON FILM	1/6 2K OHM J
	R754	RS02Z562J	R M-OXIDE FILM	2W 5.6K OHM J (TAPPING)
	R755	RD-AZ109J	R CARBON FILM	1/6 1 OHM J
	R756	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R757	RD-AZ473J	R CARBON FILM	1/6 47K OHM J
	R759	RD-AZ391J	R CARBON FILM	1/6 390 OHM J
	R760	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R761	RD-AZ472J	R CARBON FILM	1/6 4.7K OHM J
	R762	RD-AZ102J	R CARBON FILM	1/6 1K OHM J
△	R801		POSISTOR	Refer to Page 2-2
△	R802	RX10B339JN	R CEMENT	10W 3.3 OHM J BENCH 4P
	R803	RS02Z683J	R M-OXIDE FILM	2W 68K OHM J (TAPPING)
△	R804	RF02Z568J	R FUSIBLE	2W 0.56 OHM J (TAPPING)
	R805	RS01Z240J	R M-OXIDE FILM	1W 24 OHM J (TAPPING)
	R806	RD-4Z101J	R CARBON FILM	1/4 100 OHM J
	R807		R CARBON FILM	Refer to Page 2-2
	R808	RD-4Z104J	R CARBON FILM	1/4 100K OHM J
	R809	RD-4Z222J	R CARBON FILM	1/4 2.2K OHM J
	R810	RD-4Z220J	R CARBON FILM	1/4 22 OHM J
	R811	RD-4Z102J	R CARBON FILM	1/4 1K OHM J
△	R812	RC-2Z565J	R CARBON COMP	1/2 5.6M OHM J
	R815	RD-2Z104J	R CARBON FILM	1/2 100K OHM J

△	LOC.	PART NO.	PART NAME	DESCRIPTION
	R816	RD-2Z104J	R CARBON FILM	1/2 100K OHM J
	R817	RD-4Z102J	R CARBON FILM	1/6 1K OHM J
	R818	RD-4Z472J	R CARBON FILM	1/6 4.7K OHM J
	R819	RS02Z620J	R M-OXIDE FILM	2W 62 OHM J (TAPPING)
	R901		R CARBON FILM	Refer to Page 2-2
	R902		R CARBON FILM	Refer to Page 2-2
	R903		R CARBON FILM	Refer to Page 2-2
	R904		R CARBON FILM	Refer to Page 2-2
	R905		R CARBON FILM	Refer to Page 2-2
	R906		R CARBON FILM	Refer to Page 2-2
	R907	RD-4Z104J	R CARBON FILM	1/4 100K OHM J
	R908	RD-4Z104J	R CARBON FILM	1/4 100K OHM J
	R909	RD-4Z104J	R CARBON FILM	1/4 100K OHM J
	R911	RC-2Z152J	R CARBON COMP	1/2 1.5K OHM J
	R912	RC-2Z152J	R CARBON COMP	1/2 1.5K OHM J
	R913	RC-2Z152J	R CARBON COMP	1/2 1.5K OHM J
	R914	RD-4Z103J	R CARBON FILM	1/6 10K OHM J 20", 21" only
	R920	85801065GY	WIRE COPPER	AWG22 1/0.65 TIN COATING
△	SCT1		SOCKET CRT	Refer to Page 2-2
	SF101	5PK2950M	FILTER SAW	K2950M 14" only
△	SW801	5S40101143	POWER SW	PS3-22SP (P.C.B)
	SW701	5S50101090	SW TACT	SKHV17910A
	SW702	5S50101090	SW TACT	SKHV17910A
	SW703	5S50101090	SW TACT	SKHV17910A
	SW704	5S50101090	SW TACT	SKHV17910A
	SW705	5S50101090	SW TACT	SKHV17910A
△	T401	50D1042	TRANS DRIVE	TD-10A2
△	T402	50H0000177	FBT	HST1142.5057
△	T801	50M0000099	TRANS SMPS	SMT2084.0014D
	U101	4859716030	TUNER VARACTOR	3303KHC
	X501	5XE4R4336E	CRYSTAL QUARTZ	HC-49/U 4.433619MHZ 30PPM
	X701	5XE18R000E	CRYSTAL QUARTZ	HC-49/U 18.000MHZ 30PPM TTX
		5XE20R000E	CRYSTAL QUARTZ	HC-49/U 20.000MHZ 30PPM Non-TTX
	XX01	5XE3R5795E	CRYSTAL QUARTZ	HC-49/U 3.579545MHZ 30PPM
	Z501	5PXPS5R5MB	FILTER CERA	TPS5.5MB-TF21 (TP)
	Z502	5PTPS65MB	FILTER CERA	TPS 6.5MB(EFC-S6R5ME3)
	Z601	5PXF5H5R5M	FILTER CERA	SFSH5.5MCB-TF21 (TP)
	Z602	5PXF5H6R5M	FILTER CERA	SFSH6.5MCB-TF21 (TP)
△	SCT2		CRT SOCKET	Refer to Page 2-2 20", 21" only
	LP03		BEAD COIL	Refer to Page 2-2 21" only

■ PACKING

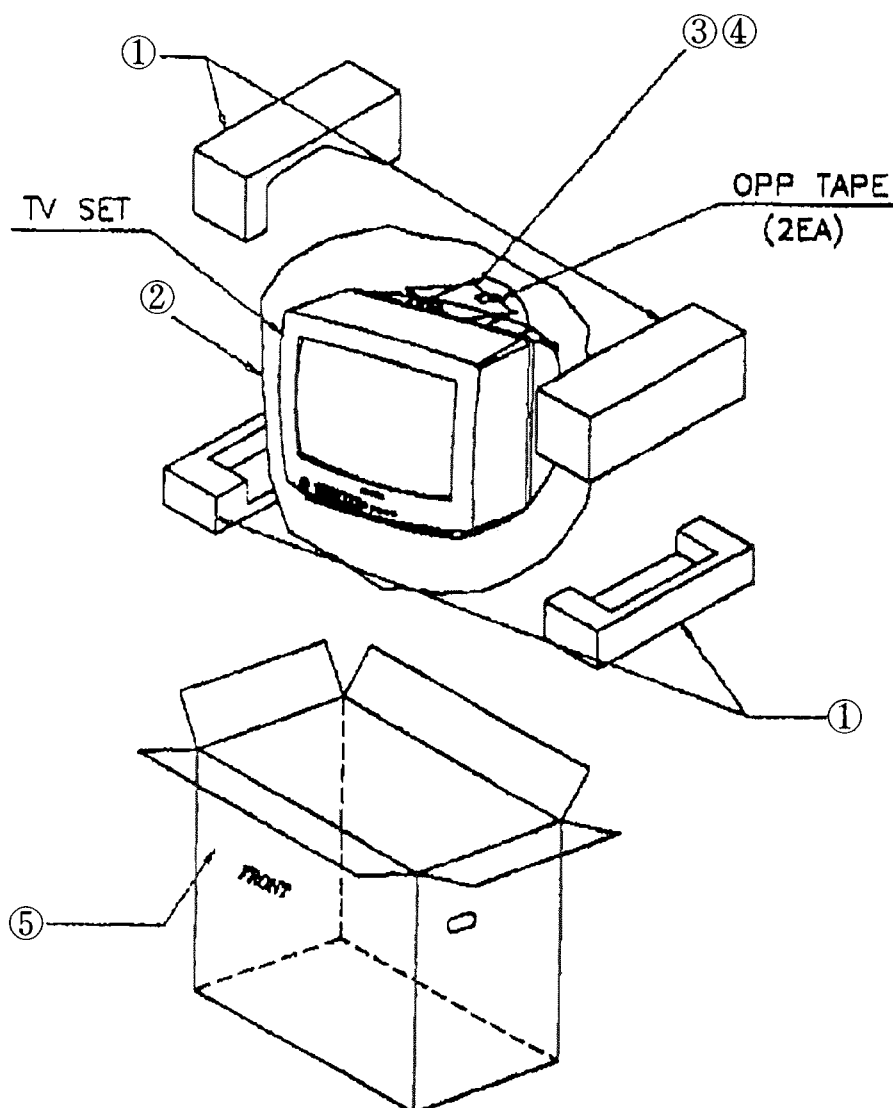



■ PACKING PARTS LIST

	REF. No.	PARTS No.	PARTS NAME	REMARKS
C-F14EE/C-FT14EE/C-FT14EBU				
	1	4858180000	CUSHION ASSY	14" ONLY
	2	4858210601	BAG PE	
	3	48B3435D05	TRANSMITTER REMOCON	
	4	4850A02310	ANT ROD	
	5		CARTON BOX	
C-F20EE/C-FT20EE/C-FT20EBU				
	1	4858179800	CUSHION ASSY	
	2	4858210702	BAG PE	
	3	48B3435D05	TRANSMITTER REMOCON	
	5		CARTON BOX	
C-F21EE/C-FT21EE/C-FT21EBU				
	1	4858179900	CUSHION ASSY	
	2	4858210702	BAG PE	
	3	48B3435D05	TRANSMITTER REMOCON	
	5		CARTON BOX	

C-F14EE/C-FT14EE/C-FT14EBU
C-F20EE/C-FT20EE/C-FT20EBU
C-F21EE/C-FT21EE/C-FT21EBU

BLOCK DIAGRAM

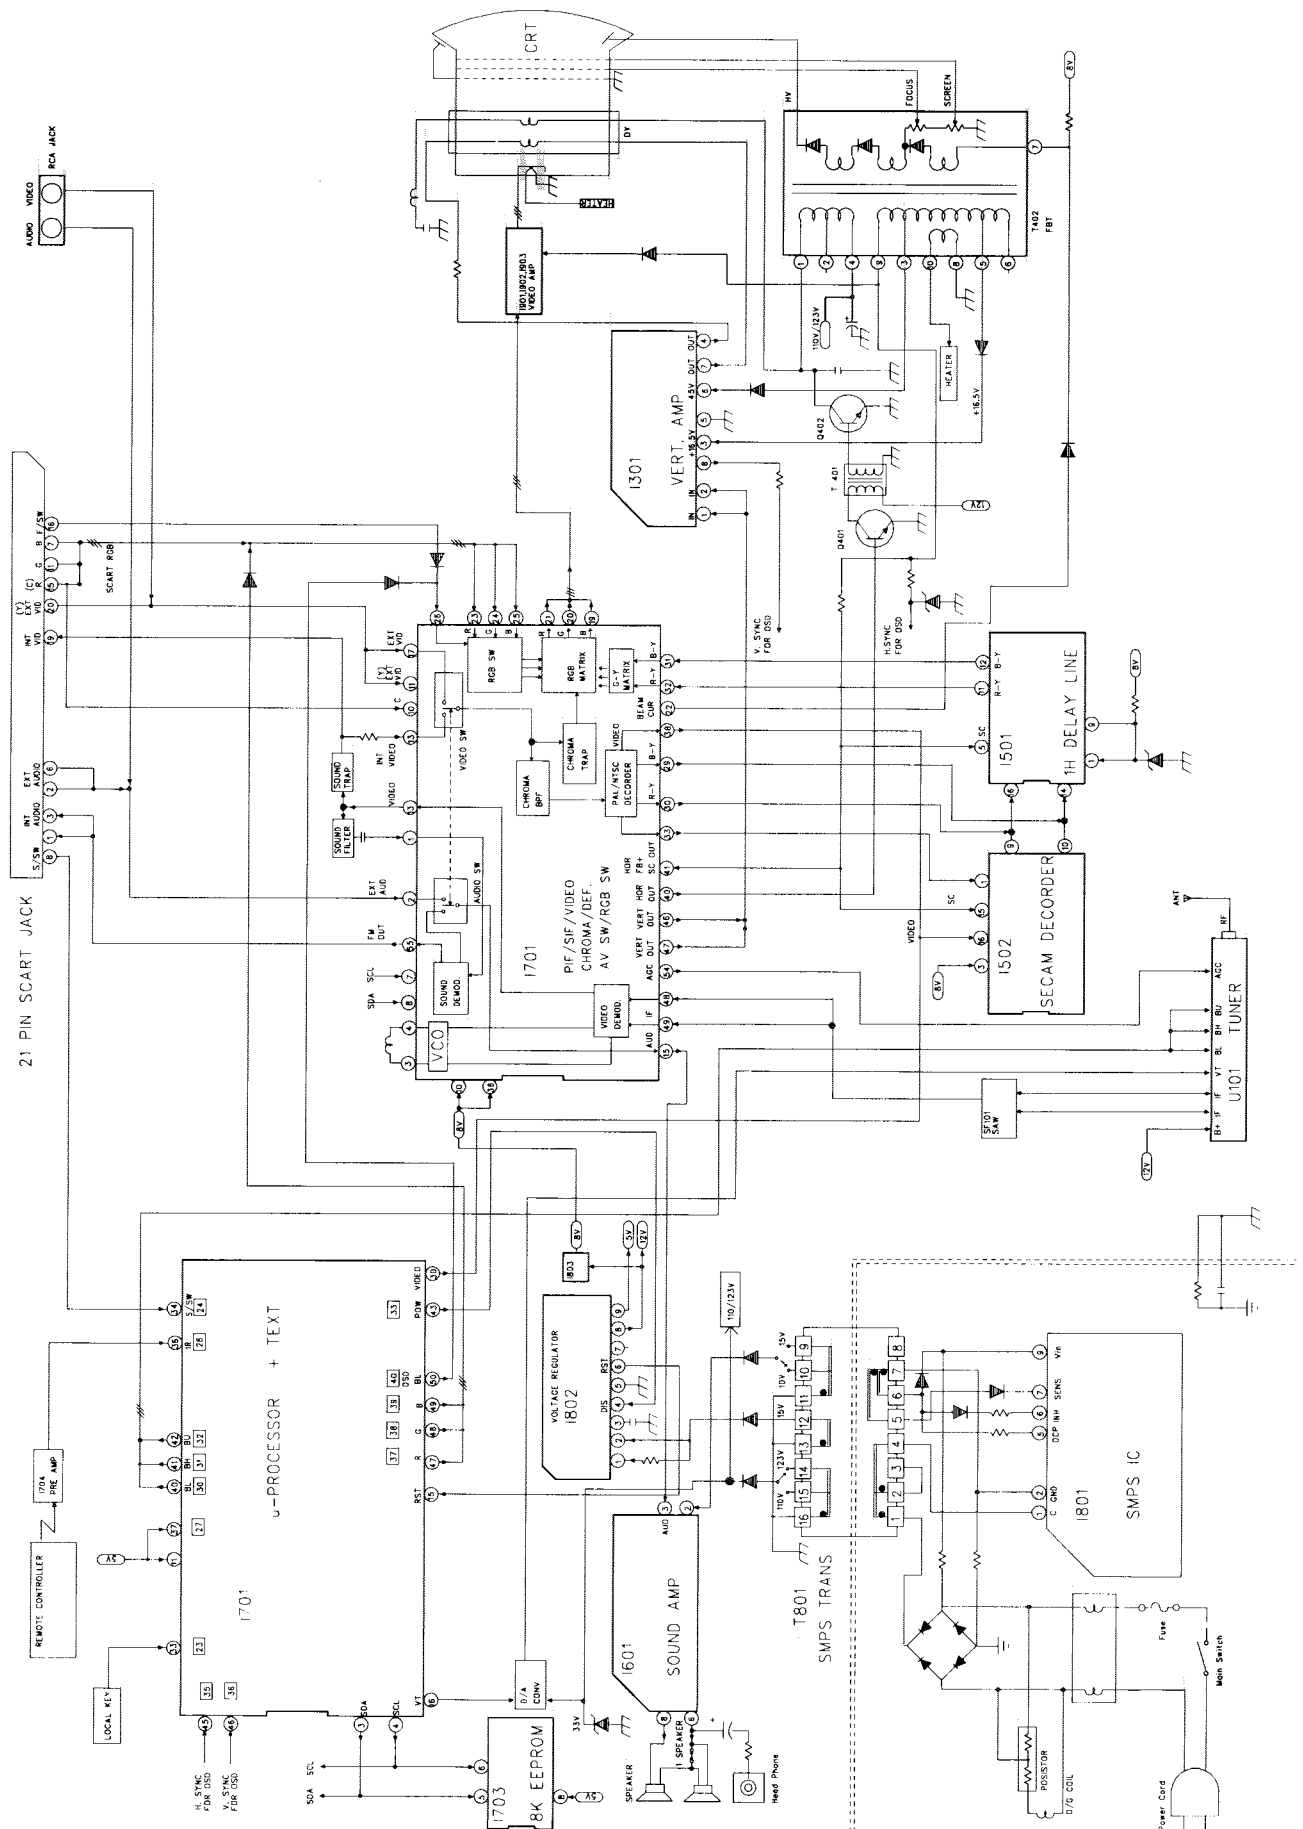

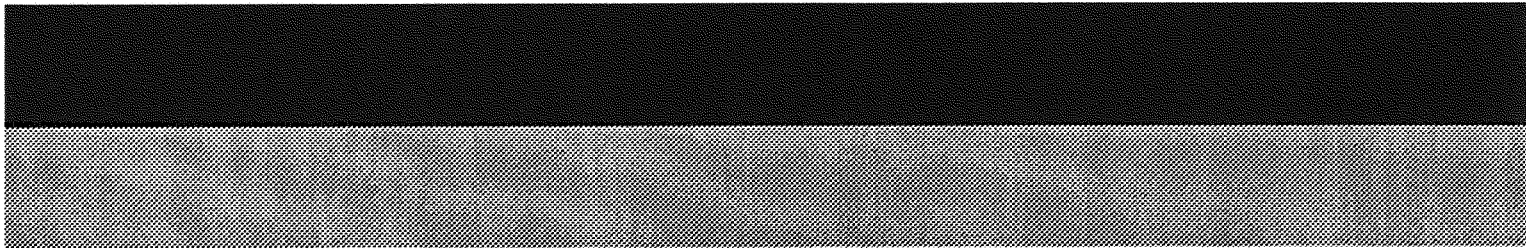

JVC

VICTOR COMPANY OF JAPAN, LIMITED
TELEVISION RECEIVER DIVISION 1106 Heta, Iwai-city, Ibaraki-prefecture, 306-06, Japan