

# STEREO RECEIVER

# RX-497

## SERVICE MANUAL

### IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel. It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

**WARNING:** Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

**IMPORTANT:** The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

**WARNING:** Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).


**IMPORTANT:** Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

## ■ CONTENTS

TO SERVICE PERSONNEL .....	2	AMP ADJUSTMENT .....	16
IMPEDANCE SELECTOR .....	3	IC DATA .....	17-18
FRONT PANELS .....	3	DISPLAY DATA .....	19
REAR PANELS .....	4-5	PIN CONNECTION DIAGRAM .....	20
REMOTE CONTROL PANELS .....	5	PRINTED CIRCUIT BOARD .....	21-27
SPECIFICATIONS .....	6-7	BLOCK DIAGRAM .....	28
INTERNAL VIEW .....	7	SCHEMATIC DIAGRAM .....	29-32
DISASSEMBLY PROCEDURES .....	8	PARTS LIST .....	33-43
SELF DIAGNOSIS FUNCTION .....	9-15	REMOTE CONTROL RAX100/RAX101 .....	44-45

■ TO SERVICE PERSONNEL

- 1. Critical Components Information  
Components having special characteristics are marked ⚠ and must be replaced with parts having specifications equal to those originally installed.
  - 2. Leakage Current Measurement (For 120V Models Only)  
When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.
- Meter impedance should be equivalent to 1500 ohms shunted by 0.15μF.

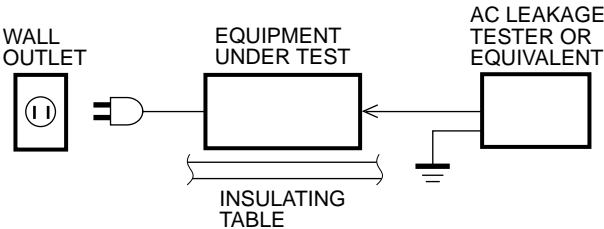

- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.



**“CAUTION”**  
“F251, F252 : FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 8A, 125V FUSE.”

**CAUTION**  
F251, F252 : REPLACE WITH SAME TYPE 8A, 125V FUSE.

**ATTENTION**  
F251, F252 : UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE 8A, 125V.

**WARNING: CHEMICAL CONTENT NOTICE!**

The solder used in the production of this product contains LEAD. In addition, other electrical/electronic and/or plastic (where applicable) components may also contain traces of chemicals found by the California Health and Welfare Agency (and possibly other entities) to cause cancer and/or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!


Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

**About Lead Free Solder**

The P.C.B.s installed in this unit are soldered using the following solder.

	SIDE A	SIDE B
FUNCTION P.C.B.	-	Lead Free Solder
OPERATION P.C.B.	-	Lead Free Solder
MAIN P.C.B.	-	Lead Free Solder
XM P.C.B.	Lead Free Solder	Lead Free Solder

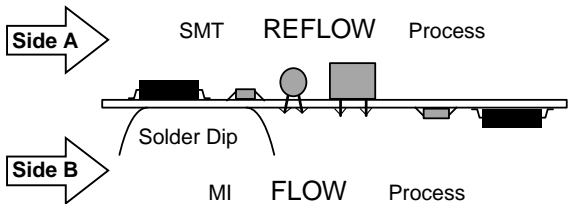


Among some types of lead free solder currently available, it is recommended to use one of the following types for the repair work.

- Sn + Ag + Cu (tin + silver + copper)
- Sn + Cu (tin + copper)
- Sn + Zn + Bi (tin + zinc + bismuth)

**Caution:**

1. As the melting point temperature of the lead free solder is about 30°C to 40°C (50°F to 70°F) higher than that of the lead solder, be sure to use a soldering iron suitable to each solder.
2. If lead solder must be used, be sure to remove lead free solder from each terminal section of the parts to be replaced and from the area around it completely before soldering, or make sure that the lead free solder and lead solder melt together fully.

## ■ IMPEDANCE SELECTOR

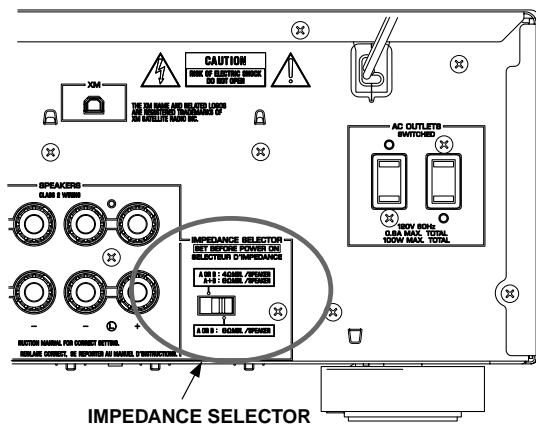


### WARNING:


Do not change the setting of the IMPEDANCE SELECTOR switch when the unit power is switched on, as doing so may damage the unit.

## ■ FRONT PANELS

### ▼ U, C models

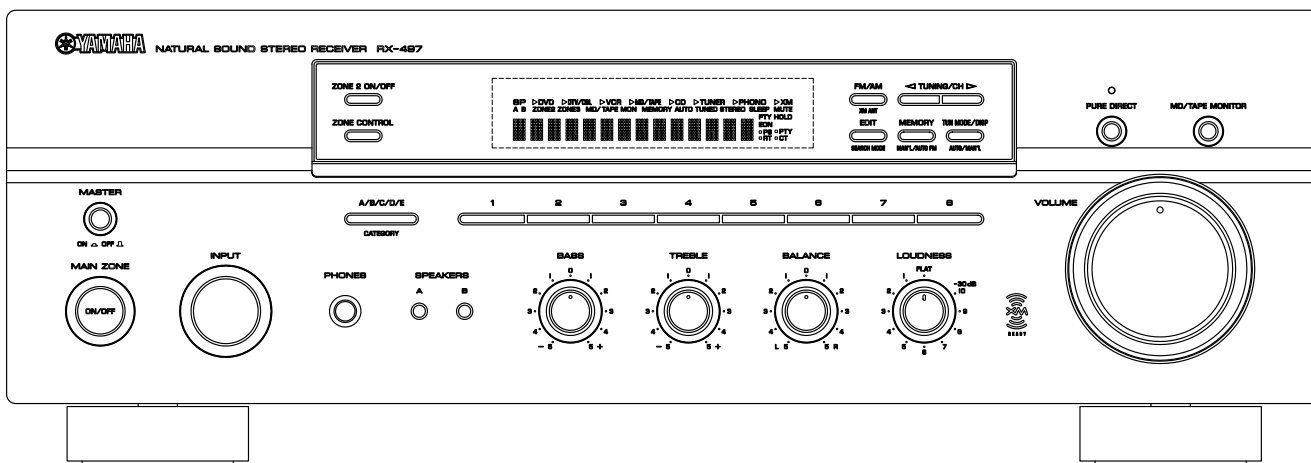


### ▼ R, A, G, E, L models

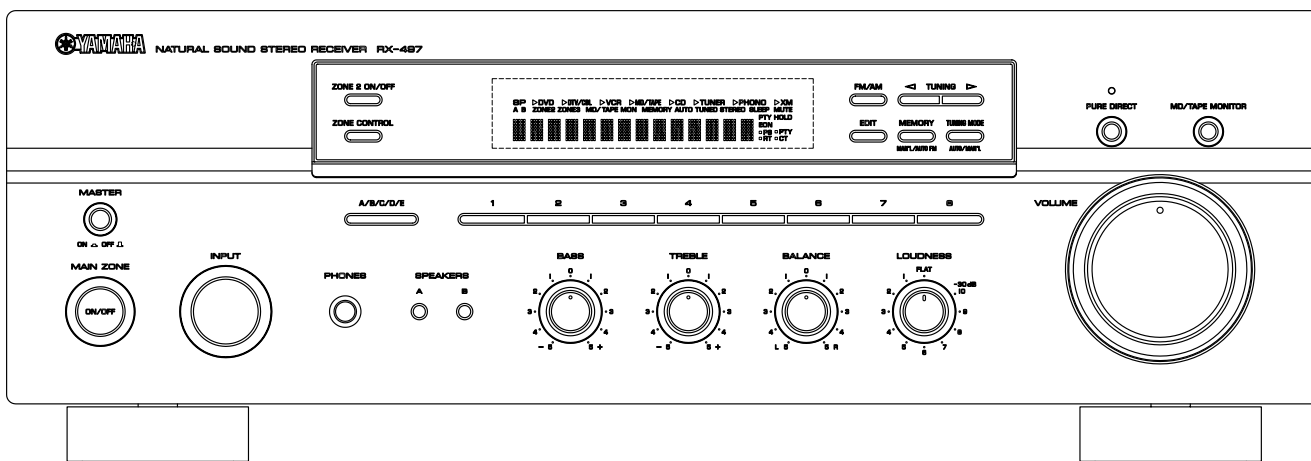


## REAR PANELS


### U, C models

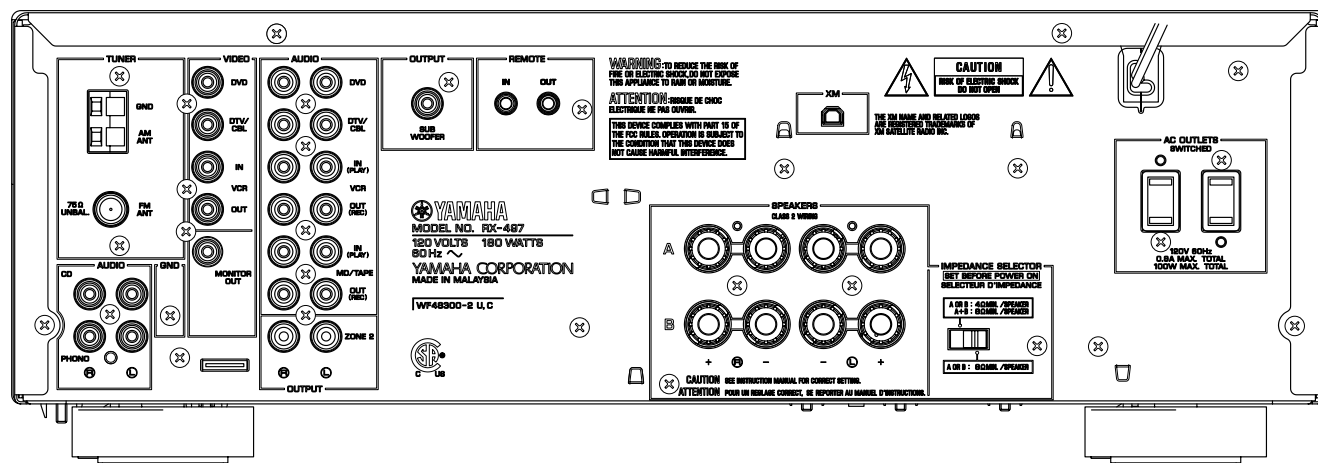


### R model

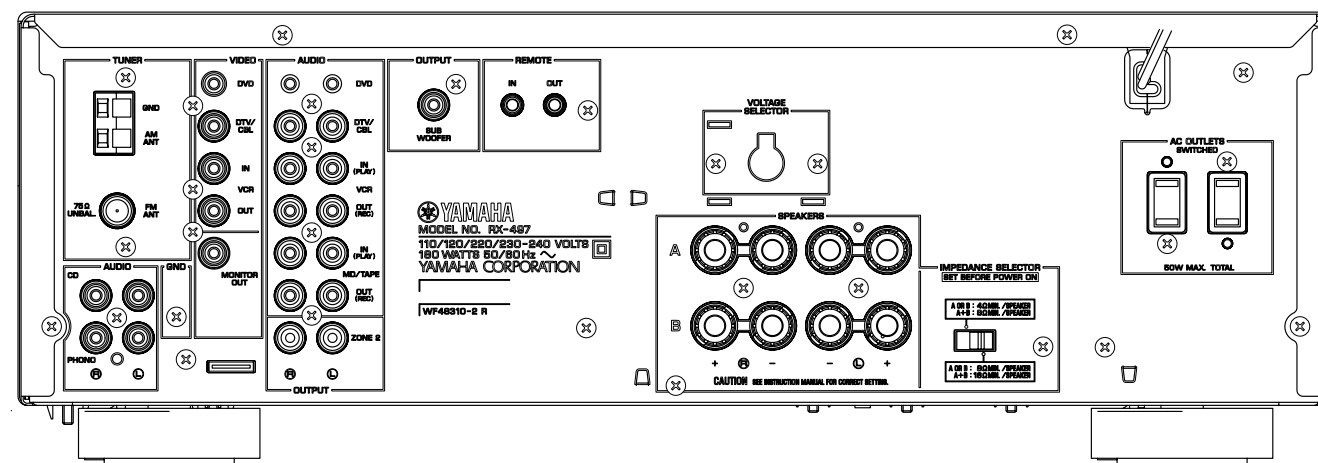


### A model

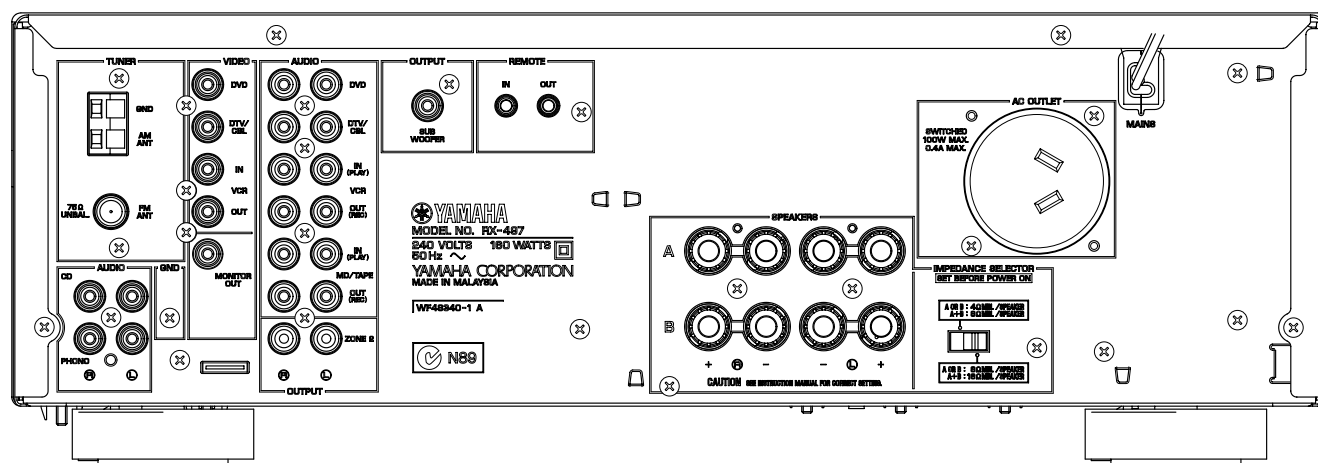

## ▼ G, E models

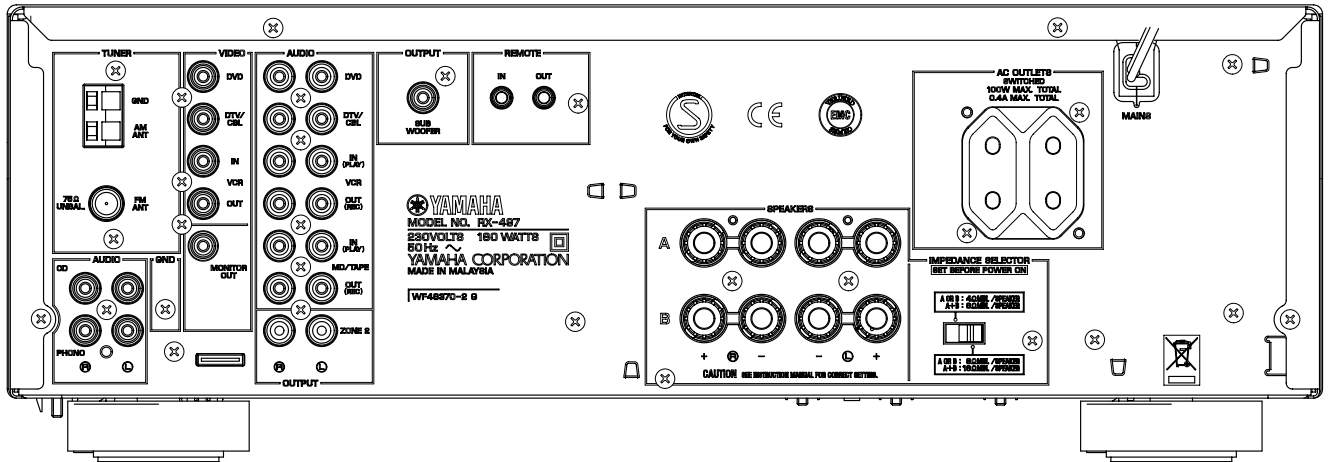


## ▼ L model

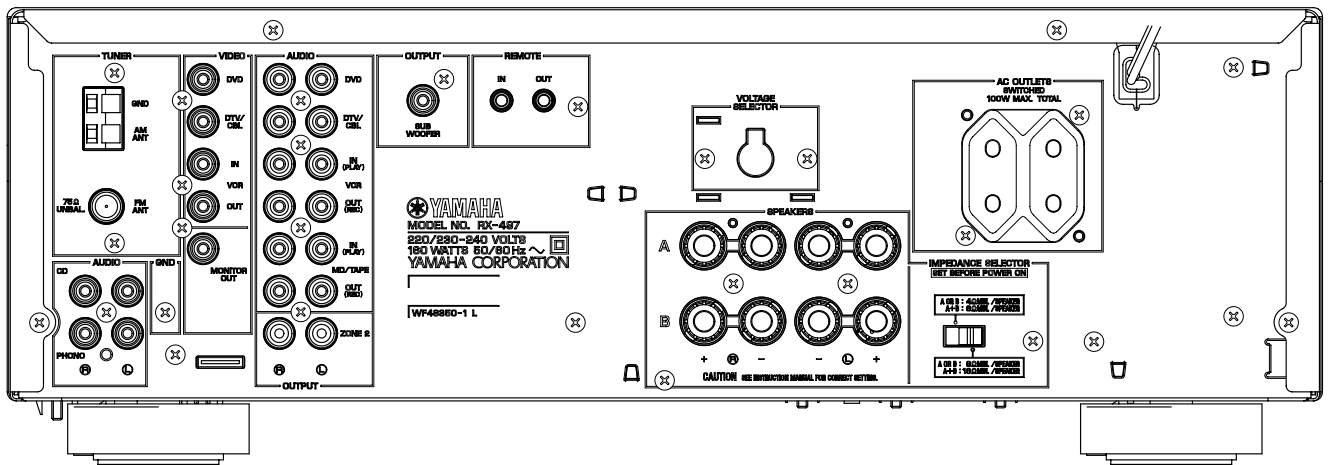


## ■ REMOTE CONTROL PANELS

## ▼ RAX100 (U, C models)

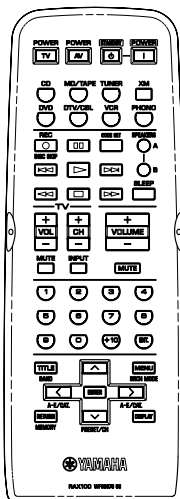

## ▼ RAX101 (R, A, G, E, L models)

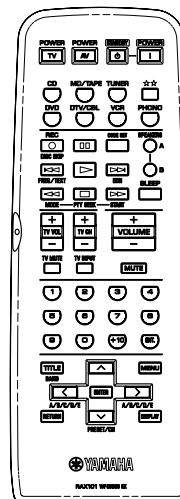

SPECIFICATIONS

AUDIO SECTION

<b>Minimum RMS Output Power (Power Amp. Section)</b>	
L/R, 20 Hz to 20 kHz, 0.04% THD, 8 ohms	75 W + 75 W
<b>Dynamic Power Per Channel (IHF)</b>	
8/6/4/2 ohms	105/125/150/178 W
<b>Maximum Power Per Channel (G, E models)</b>	
1 kHz, 0.7 % THD, 4 ohms	105 W
<b>IEC Power (G, E models)</b>	
1 kHz, 0.04% THD, 8 ohms	84 W
<b>Maximum Power (EIAJ) (R, L models)</b>	
1 kHz, 10% THD, 8 ohms	115 W
<b>Power Band Width</b>	
L/R, 0.08% THD, 35 W, 8 ohms	10 Hz to 50 kHz
<b>Damping Factor</b>	
20 Hz to 20 kHz, SPEAKER-A, 8 ohms	150 or more
<b>Input Sensitivity/Input Impedance</b>	
PHONO MM	3.0 mV/47 k-ohms
CD, etc.	185 mV/47 k-ohms
<b>Maximum Input Signal</b>	
PHONO MM, 1kHz, 0.04 % THD	70 mV
CD, etc., 1kHz, 0.04 % THD	2.2 V
<b>Output Level/Output Impedance</b>	
SUBWOOFER	4 V/1.2 k-ohms
ZONE2 OUT	185 mV/1.2 k-ohms
REC OUT	185 mV/1.2 k-ohms
<b>Headphone Jack Rated Output/Output Impedance</b>	
CD, etc. 1 kHz, 185 mV, 8 ohms, 0.04% THD	0.47 V/390 ohms
<b>Frequency Response</b>	
CD, etc. 20 Hz to 20 kHz	0 ± 0.5 dB
CD, etc. PURE DIRECT ON, 10 Hz to 100 kHz	0 ± 1.0 dB
<b>RIAA Equalization Deviation</b>	
PHONO MM	0 ± 0.5 dB
<b>Total Harmonic Distortion (20 Hz to 20 kHz)</b>	
PHONO MM to REC OUT (3 V)	0.02 % or less
CD, etc. to SP OUT (35 W/8 ohms)	0.02 % or less
<b>Signal to Noise Ratio (IHF-A Network)</b>	
PHONO MM (Input shorted, 5 mV)	82 dB or more
CD, etc. (Input shorted, 185mV)	108 dB or more
<b>Residual Noise (IHF-A Network)</b>	
PURE DIRECT ON	100 µV
<b>Channel Separation</b>	
CD, etc. (Input 5.1 k-ohms shorted)	
1 kHz	65 dB or more
10 kHz	50 dB or more
<b>Tone Control Characteristics</b>	
BASS	Boost/Cut (50 Hz)
	Turnover Frequency
TREBLE	Boost/Cut (20 kHz)
	Turnover Frequency
<b>Continuous Loudness Control</b>	
Attenuation (1 kHz)	-30 dB
<b>Gain Tracking Error</b>	
0 to -60 dB	2 dB or less
<b>VIDEO SECTION</b>	
<b>Video Signal Type</b>	
U, C, R models	NTSC
A, G, E, L models	PAL
<b>Video Signal Level</b>	
	1 Vp-p/75 ohms
<b>Video Maximum Input Level</b>	
	1.5 Vp-p or more
<b>Video Signal to Noise Ratio</b>	
	50 dB or more
<b>Monitor Out Frequency Response</b>	
	5 Hz to 10 MHz, -3 dB

FM SECTION

<b>Tuning Range</b>	
U, C models	87.5 to 107.9 MHz
R, L models	87.5 to 108.0/87.50 to 108.00 MHz
A, G, E models	87.50 to 108.00 MHz
<b>50 dB Quieting Sensitivity (IHF)</b>	
1 kHz 100% MOD.	
Mono	2.0 µV (17.3 dBf)
Stereo	25 µV (39.2 dBf)
<b>Usable Sensitivity (IHF)</b>	
Mono	1.0 µV (11.2 dBf)
<b>Selectivity</b>	
at 400 kHz	70 dB
<b>Signal to Noise Ratio (IHF)</b>	
Mono	76 dB
Stereo	70 dB
<b>Harmonic Distortion (1 kHz)</b>	
Mono	0.2 %
Stereo	0.3 %
<b>Stereo Separation (1 kHz)</b>	
	45 dB
<b>Frequency Response</b>	
20 Hz to 15 kHz	+0.5/-2.0 dB
<b>Antenna Input</b>	
	75 ohms unbalanced
<b>AM SECTION</b>	
<b>Tuning Range</b>	
U, C models	530 to 1710 kHz
R, L models	530 to 1710/531 to 1611 kHz
A, G, E models	531 to 1611 kHz
<b>Usable Sensitivity</b>	
	300 µV/m
<b>Antenna</b>	
	Loop antenna
<b>GENERAL</b>	
<b>Power Supply</b>	
U, C models	AC 120 V, 60 Hz
R model	AC 110/120/220/230-240 V, 50/60 Hz
A model	AC 240 V, 50 Hz
G, E models	AC 230 V, 50 Hz
L model	AC 220/230-240 V, 50/60 Hz
<b>Power Consumption</b>	
	180 W
<b>Standby Power Consumption (reference)</b>	
	0.1 W
<b>Maximum Power Consumption (R model)</b>	
1 kHz, 8 ohms, 10% THD	400 W
<b>AC Outlet</b>	
2 Switched Outlet	
R model	50 W Max. total
U, C, G, E, L models	100 W Max. total
1 Switched Outlet	
A models	100 W Max.
<b>Dimensions (W x H x D)</b>	
	435 x 151 x 308 mm
	(17-1/8" x 5-15/16" x 12-1/8")
<b>Weight</b>	
	8.7 kg (19 lbs 3 oz)
<b>Finish</b>	
	Black Color (U, C, R, A, G, E, L models)
	Titanium Color (R, G, E, L models)
	Gold Color (L model)
<b>Accessories</b>	
	Remote Control x 1
	Battery (AA, R6, UM-3) x 2
	Indoor FM Antenna x 1
	AM Loop Antenna x 1

\* Specifications subject to change without notice.




READY

© 2005 XM Satellite Radio Inc. All rights reserved. All other trademarks are the property of their respective owners.

U ..... USA model  
C ..... Canadian model  
R ..... General model  
A ..... Australian model


G ..... European model  
E ..... South European model  
L ..... Singapore model

## DIMENSIONS

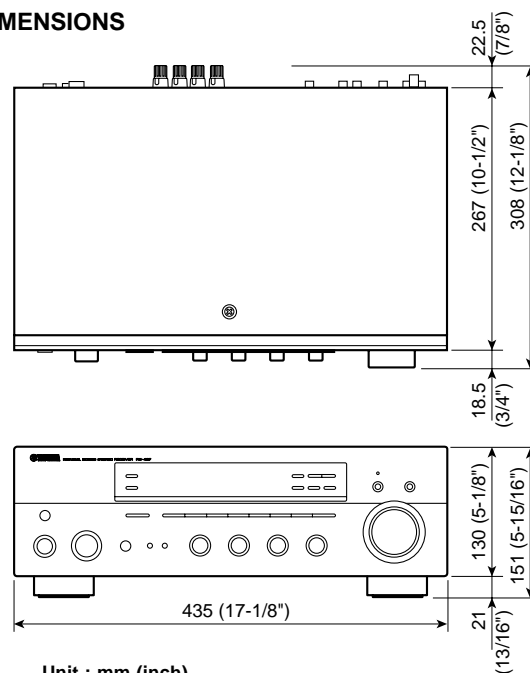

Unit : mm (inch)

## INTERNAL VIEW

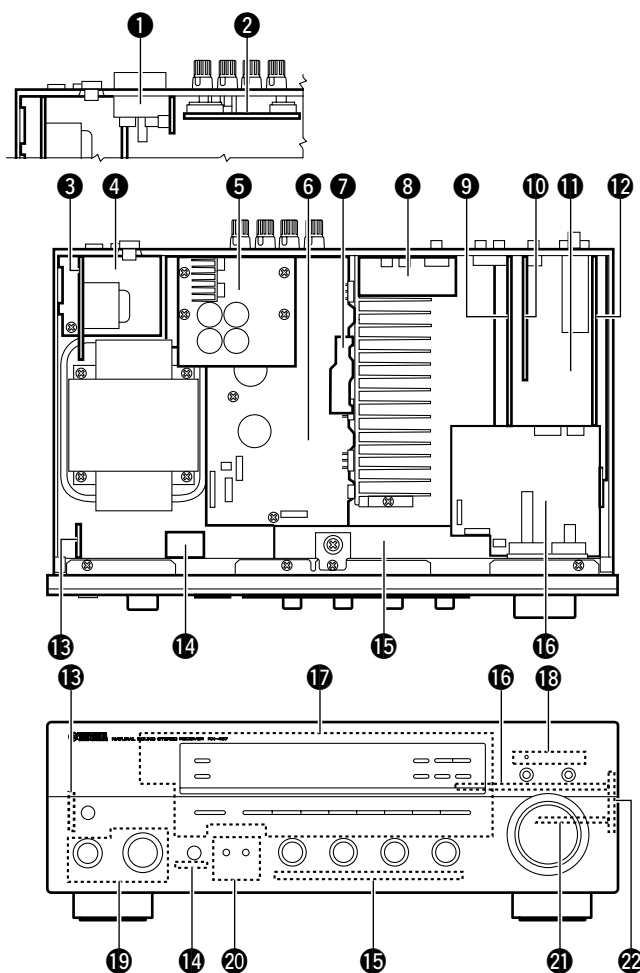

- ① OPERATION (12) P.C.B. (A, G, E, L models)
- ② MAIN (4) P.C.B. (R, L models)
- ③ MAIN (2) P.C.B.
- ④ MAIN (3) P.C.B.
- ⑤ XM P.C.B. (U, C models)
- ⑥ MAIN (1) P.C.B.
- ⑦ MAIN (5) P.C.B.
- ⑧ FUNCTION (4) P.C.B.
- ⑨ FUNCTION (1) P.C.B.
- ⑩ FUNCTION (3) P.C.B.
- ⑪ FUNCTION (2) P.C.B.
- ⑫ OPERATION (13) P.C.B.
- ⑬ OPERATION (6) P.C.B.
- ⑭ OPERATION (10) P.C.B.
- ⑮ OPERATION (3) P.C.B.
- ⑯ OPERATION (2) P.C.B.
- ⑰ OPERATION (1) P.C.B.
- ⑱ OPERATION (8) P.C.B.
- ⑲ OPERATION (5) P.C.B.
- ⑳ OPERATION (7) P.C.B.
- ㉑ OPERATION (4) P.C.B.
- ㉒ OPERATION (9) P.C.B.

## ■ DISASSEMBLY PROCEDURES

- Remove parts in disassembly order as numbered.
- Disconnect the power cable from the AC outlet.

### 1. Removal of Top Cover

- Remove 4 screws ( ① ), 1 screw ( ② ) and 4 screws ( ③ ). (Fig. 1)
- Slide the Top Cover rearward to remove it. (Fig. 1)

### 2. Removal of Front Panel Unit

- Remove 5 knobs (INPUT, BASS, TREBLE, BALANCE and LOUDNESS).
- Remove 1 screw ( ④ ) and then remove the Support Top. (Fig. 1)
- Remove 7 screws ( ⑤ ) and then remove the Front Panel Unit. (Fig. 1)

### 3. Removal of Plate Side

Remove 2 push rivets ( ⑥ ) and then remove the Plate Side L/R. (Fig. 1)

### 4. Removal of Sub Chassis Unit

- Remove 2 screws ( ⑦ ) and then slide the Sub Chassis Unit forward. (Fig. 1)
- Loosen the harness fixture fixing the cable.
- Remove connectors CB103, CB401, CB404, CB506, CB606 and CB611 and then remove the Sub Chassis Unit. (Fig. 1)

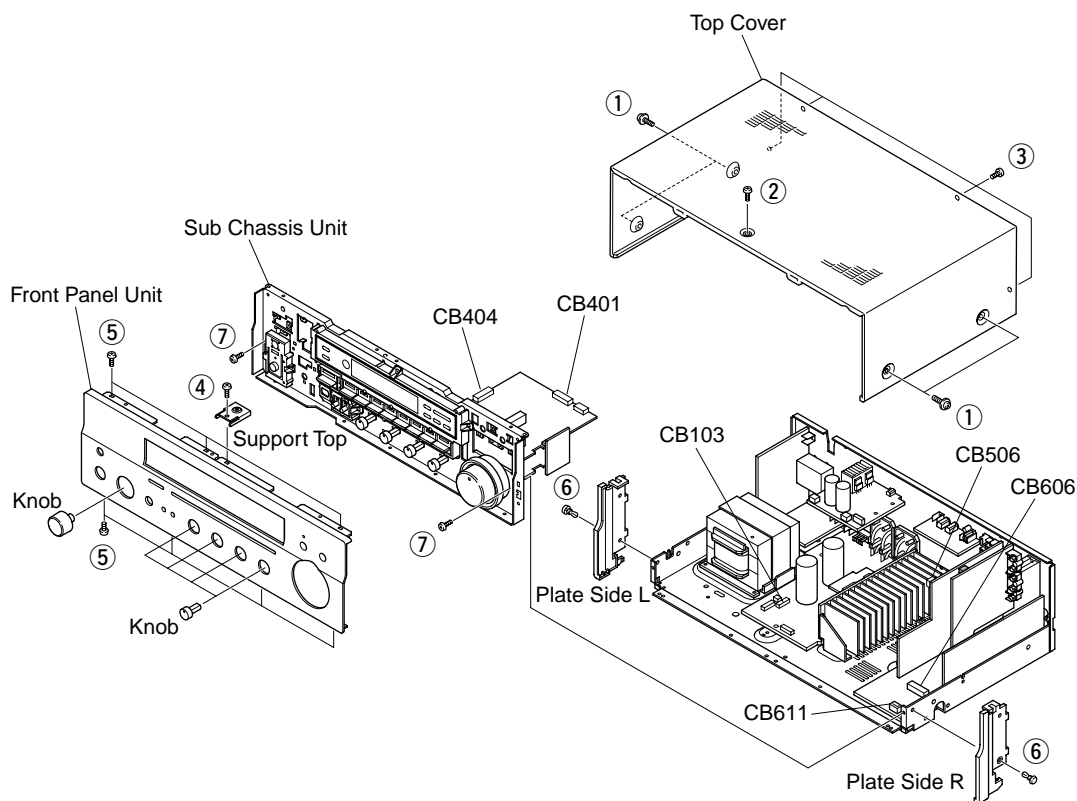


Fig. 1




## ■ SELF DIAGNOSIS FUNCTION

This product has a built-in self diagnosis function (DIAG) to facilitate inspection, measurement and determination of a faulty item, if any. There are 8 DIAG menu items, each having sub-menu items.

No.	DIAG menu	Sub-menu
1	DISPLAY CHECK	1. VFD CHECK (Initial display)
		2. VFD DISP OFF (All segments OFF)
		3. VFD DISP ALL (All segments ON 100%)
		4. VFD DIMMER (All segments ON 50%)
		5. CHECKED PATTERN (ON in lattice)
2	FACTORY PRESET	1. PRESET INHI (memory initialization inhibited)
		2. PRESET RSRV (memory initialized)
3	AD DATA CHECK	1. DC/PS (protection)
		2. THM L, R
		3. REC-OUT (No applied to this model)
		4. K0 / K1 (panel key)
4	XM STATUS	1. XMS1
		2. XMS2
5	PROTECTION SETTING	1. PS_Lo :
		2. PS_Hi :
		3. DC_Lo :
		4. DC_Hi :
		5. TEMP :
6	PROTECTION HISTORY	1. history 1
		2. history 2
		3. history 3
		4. history 4
7	SOFT SWITCH	1. SW MODE : PCB (/MODEL/FNC)
		2. MODEL SETTING : RX497 (/RX797/RX397)
		3. DESTINATION : UC (/RL/A/BG)
		4. TUNER DESTINATION : (/RL/ABG)
		5. TUNER TYPE : NRM (/RDS/XM)
		6. ZONE2 : EXIST (/NOT)
8	MICROPROCESSOR INFORMATION	1. VERSION
		2. CHECK SUM
		3. OPE / XM
		4. PORT
		5. EE SUM

## ● Starting DIAG

Press the “MASTER” key of the main unit while simultaneously pressing the “FM/AM” key and the “8” key to activate the DIAG function.

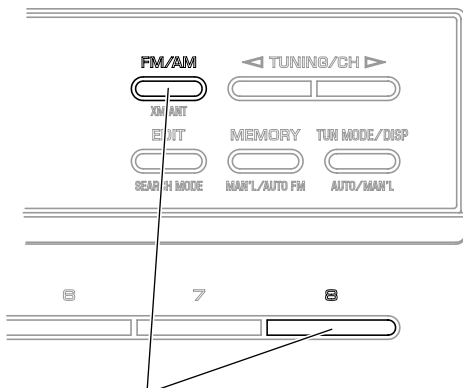

Turn on the power while pressing these keys.

## ● Starting DIAG in the protection cancel mode

If the protection function works and causing hindrance to trouble diagnosis, cancel the protection function as described below and it will be possible to enter the DIAG mode. (The protection functions other than the excess current detect function will be disabled.)

Press the “MASTER” key while simultaneously pressing those two keys indicated in the figure above. At this time, keep pressing those two keys for 3 seconds or longer.

In this mode, the “SLEEP” segment of the FL display of the main unit flashes to indicate that the mode is DIAG mode with the protection functions disabled.

### CAUTION!

**Using this product with the protection function disabled may cause damage to itself. Use special care for this point when using this mode.**

## ● Canceling DIAG

**1** Before canceling DIAG, execute setting for PRESET of DIAG menu No.2 (Memory initialization inhibited or Memory initialized).

\* **In order to keep the user memory stored, be sure to select PRESET INHIBITED (Memory initialization inhibited). Protection history will remain in memory.**

**2** Turn off the power by pressing the “MASTER” key of the main unit.

## ● Display provided when DIAG started

On the FL display of the main unit, an opening message (including the version and the protection history) appears for a few seconds followed by the diagnostic menu display (1. VFD CHECK).

### When there is no history of protection function:

#### Opening message

When there is no protection history.

NO PROTECT Z

Version (1 alphabet)



After a few seconds.

#### DIAG menu display

1. VFD CHECK

### When there is a history of protection function:

The FL display appears as shown below depending on the type of the protection function.

The protection function worked due to excessive current through the amplifier. The protection function activates immediately to turn off the power, with no history display at turn-on, if the amplifier is defective.

I PROTECT Z

The protection function worked due to a defect or overload in the power supply. The abnormal voltage is displayed in % based on 5V as 100%. If the power is turned on with the abnormality unsolved, the protection function works in about 1 second to turn off the power.

PS PRT :000 Z

The protection function worked due to a DC voltage appearing at the speaker terminal.

A cause could be a defect in the amplifier. If the power is turned on with the abnormality unsolved, the protection function works in about 3 seconds to turn off the power.

DC PRT :000 Z

The protection function worked due to the temperature limit being exceeded. Causes could be poor ventilation or a defect related to the thermal sensor. The abnormal voltage is displayed in % based on 5V as 500%. If the power is turned on with the abnormality unsolved, the protection function works in about 1 second to turn off the power.

TMR PRT:000 Z

For detection of each protection function (except I-PROTECT) , refer to DIAG MENU No.3 AD DATA CHECK (p.13).

#### ● History of protection function

When the protection function has worked, its history is stored in memory with a backup. Even if no abnormality is noted while servicing the unit, an abnormality which has occurred previously can be defined as long as the backup data has been stored.

The history of the protection function is cleared when DIAG is cancelled by selecting PRESET RESERVED (Memory initialized) of DIAG menu No.2 or when the backup data is erased.

#### ● Display during menu operation


During the DIAG operation, the function at work is indicated on the FL indicator. The contents displayed during the function operation are described later in the “Details of DIAG menu” section.

### ● Operation procedure of DIAG MENU and SUB-MENU

There are 8 MENU items, each of which has some SUB-MENU items.


#### DIAG menu selection

Select the menu using PRESET NO keys.

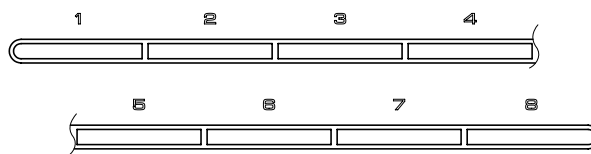

#### SUB-MENU selection

Select the sub-menu using ▷ (Forward) and ◁ (Reverse) keys of TUNING.



### ● Functions in DIAG mode

In addition to the DIAG menu items, functions as listed below are available.

- Input selection
- Muting
- Power on/off
- Master volume

\* Functions related to the tuner is not available.


### ● Initial settings used to start DIAG

The following initial settings are used when starting DIAG. When DIAG is canceled, these settings are restored to those before starting DIAG.

- Input: DVD
- Audio mute: OFF
- DIAG menu: DISPLAY CHECK (1. VFD CHECK)

1. DISPLAY CHECK


This program is used to check the FL display section. The display condition varies as shown below according to the sub-menu operation.

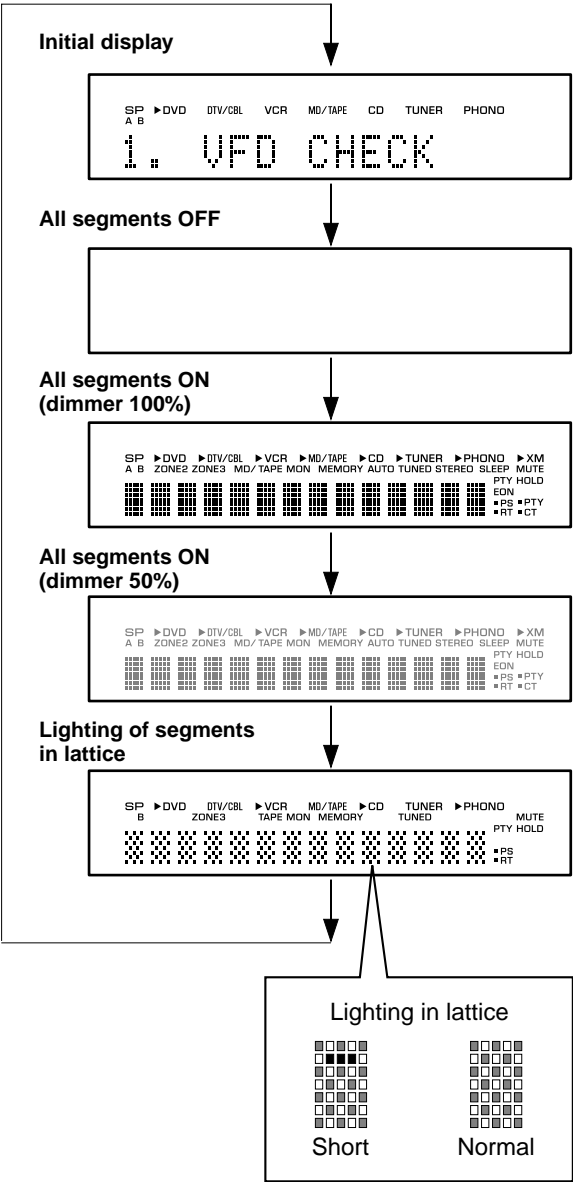

Segment conditions of the FL driver and the FL tube are checked by turning ON and OFF all segments. Next, the operation of the FL driver is checked by using the dimmer control. Then a short between segments next to each other is checked by turning ON and OFF all segments alternately (in lattice). (In the above example, the segments in the second row from the top are shorted.)

2. FACTORY PRESET

This menu is used to reserve/inhibit initialization of the back-up RAM.

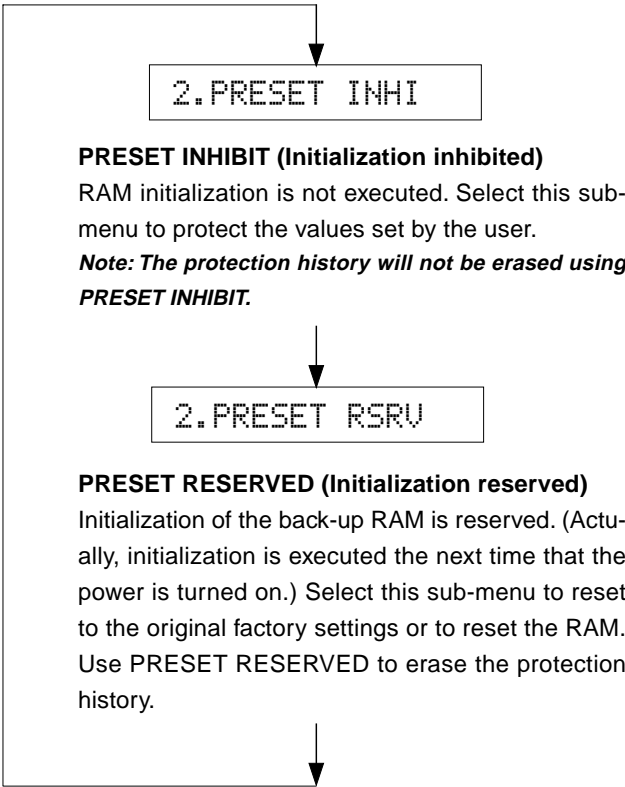

**CAUTION:** Before setting to the PRESET RESERVED, write down the existing preset memory content of the Tuner in a table as shown below. (This is because setting to the PRESET RESERVED will cause ALL user memory contents to be erased.)

Preset group	P1	P2	P3	P4
A				
B				
C				
D				
E				

Preset group	P5	P6	P7	P8
A				
B				
C				
D				
E				

## ● PRESET STATIONS

STATION		FM FACTORY PRESET DATA (MHz)	
PAGE	NO.	U, C	R, A, G, E, L
A/C/E	1	87.5	87.50
	2	90.1	90.10
	3	95.1	95.10
	4	98.1	98.10
	5	107.9	108.00
	6	88.1	88.10
	7	106.1	106.10
	8	107.9	108.00

STATION		AM FACTORY PRESET DATA (kHz)	
PAGE	NO.	U, C, R	A, G, E, L
B/D	1	630	630
	2	1080	1080
	3	1440	1440
	4	530	531
	5	1710	1611
	6	900	900
	7	1350	1350
	8	1400	1404

## 3. AD DATA CHECK

With this sub-menu used, the key scanning, A/D value of the voltage at the abnormality detect (protection) port, etc. are displayed. The A/D conversion value is displayed in %. The state before audio signal processing is kept.

When K0/K1 menu is selected, keys become nonoperable due to detection of the values of all keys.

However, it is possible to advance to the next sub-menu by turning the INPUT of the main unit. When using this function, note that turning the INPUT more than 2 clicks will cause the volume value to change.

*\* The numeric value in the diagram is for reference.*

### DC/PS (protection detection)

**DC:** DC detect protection value

Normal value: 19 to 51 (Reference: 5V = 100%)

**PS:** Power supply voltageprotection value

Normal value: 54 to 84 (Reference: 5V = 100%)

When the value is outside of the normal range, the protection function works to turn off the power.

DC:035 PS:067

## THM (temperature detection)

When the value is outside of the normal range, the protection function works to turn off the power.

500% display of the voltage based on the temperature detected value. Reference voltage: 5V

*\* For RX-497, only R ch is effective.*

THM:L000 R098

## REC-OUT

Not applied to this model.

REC-OUT:225

## K0/K1

This is the A/D value of the panel key input ports KEY0 and KEY1 (microprocessor). The table below shows the A/D value obtained when each key is pressed. When the value is not within the standard value range, no correct operation is provided. Referring to the table below, check the value of each voltage dividing resistor of each key, solder condition, etc.

K0:100 K1:099

	%	Key0	Key1
1	0 – 4	FM/AM	P8
2	4 – 12	TUNING DOWN	P7
3	12 – 21	TUNING UP	P6
4	21 – 30	TUNING MODE	P5
5	31 – 41	MEMORY	P4
6	42 – 52	EDIT	P3
7	52 – 61	ZONE CTRL	P2
8	61 – 68	SPEAKER B	P1
9	68 – 74	SPEAKER A	A/B/C/D/E
10	75 – 81		
11	81 – 89		

## 4. XM STATUS

XM Radio data is displayed.

4. XM51xxxxxxxx




4. XM52xxxxxxxx

5. PROTECTION SETTING

This menu is used to change the protection setting value. The change is effective in this menu only. A set value can be specified between 0 – 255 (0V – 5V).

Operation:

Change the digit with the “EDIT” key.  
UP / DOWN with the TUNING MODE / MEMORY key.

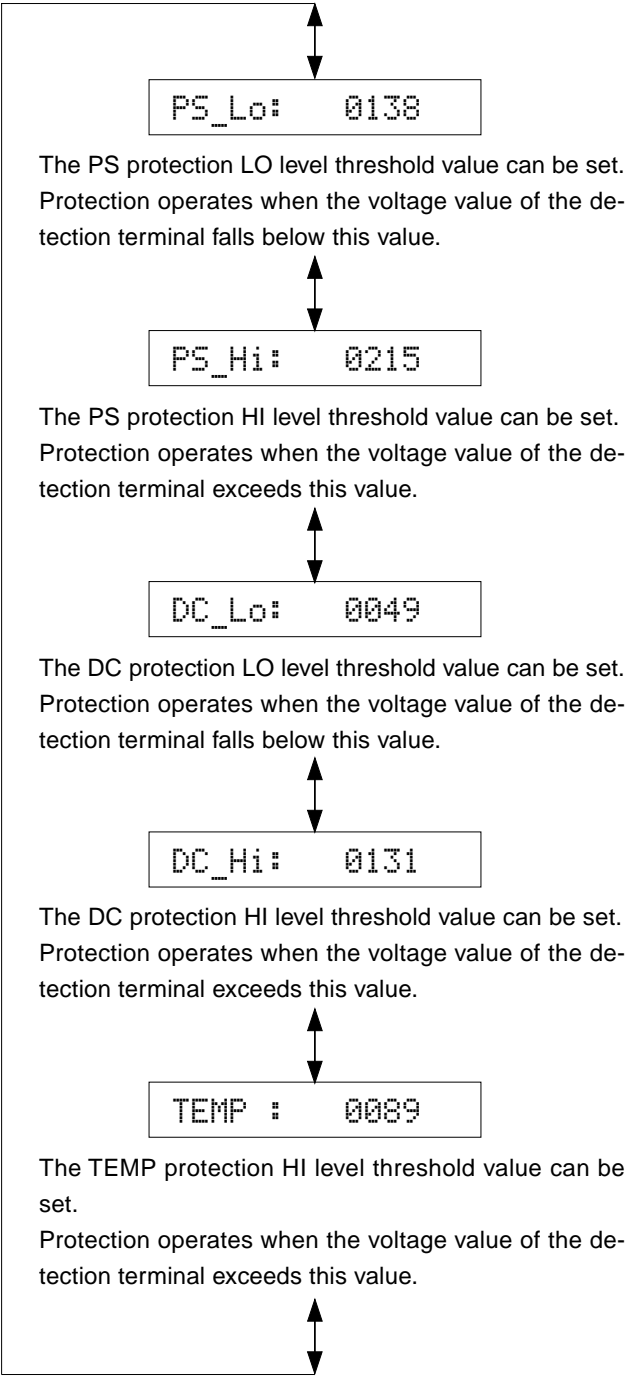

6. PROTECTION HISTORY

Four protection histories are display. The history is cleared by the initialization reservation of DIAG menu No. 2.


When there is no history of protection function:

There is no history of protection function.



When there is a history of protection function:

There is a history of protection function due to excess current.



There is a history of protection function due to abnormal voltage in the power supply section. The abnormal voltage is displayed in % based on 5V as 100%.




There is a history of protection function due to abnormal DC output. The abnormal voltage is displayed in % based on 5V as 100%.



There is a history of protection function excessive heatsink temperature. (R ch) The abnormal voltage is displayed in % based on 5V as 500%.



There is a history of protection function excessive heatsink temperature. (L ch) Not applied to this model.



\*The numeric value in the diagram is for reference.

## 7. SOFT SWITCH

**Note)** Changing the function setting may hinder the proper operation.

This menu is used to switch the function settings on P.C.B. through the software so as to activate the product.

The operation mode can be changed by selecting the sub-menu and then using the EDIT key.

The protection function follows the P.C.B. settings.

When connected to AC, the unit is initialized to the P.C.B. setting. Display of each function after initialization varies depending on settings on P.C.B.

**SW MODE:** PCB, MODEL or FNC can be selected.

7.SW :PCB

**MODEL SETTING:** RX797, RX497 or RX397 can be selected. (SW MODE: Selectable when MODEL has been selected.)

7.MODEL :RX497

**DESTINATION:** UC / RL / A or BGE can be selected. (SW MODE: Selectable when MODEL has been selected.)

7.DEST :UC

**TUNER DEST INATION:** UC, RL or ABGE can be selected. (SW MODE: Selectable when FNC has been selected.)

7.TuDest :UC

**TUNER TYPE:** NRM, RDS or XM can be selected. (SW MODE: Selectable when FNC has been selected.)

7.TuTyP :XM


**ZONE2:** NOT or EXIST can be selected. (SW MODE: Selectable when FNC has been selected.)

7.ZONE2 :EXIST

## 8. MICROPROCESSOR INFORMATION

The version, checksum and the port specified by the microprocessor are displayed. The checksum is obtained by adding the data at every 16 bits for each program area and expressing the result as a 4-figure hexadecimal data.

*\*The numeric value in the diagram is for reference.*

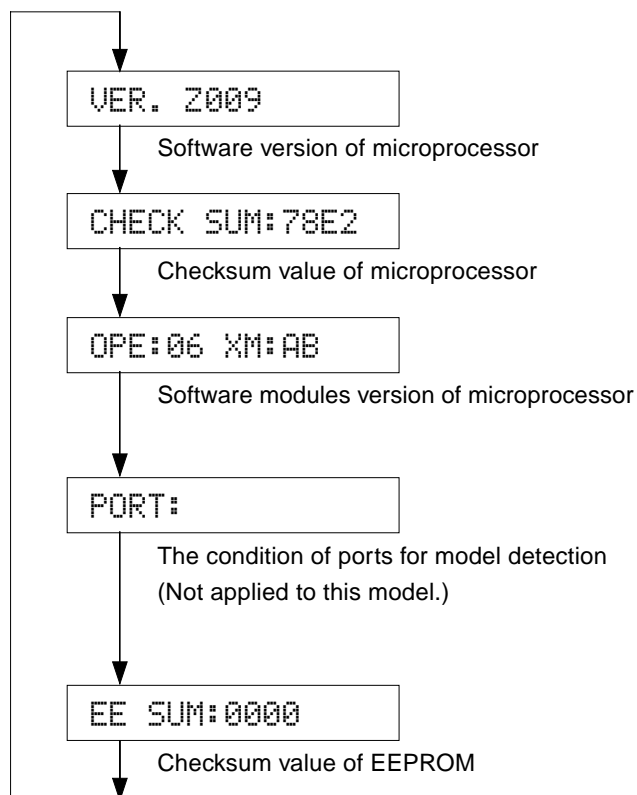


Tuner Dest	Frequency Range		Comment
	FM	AM	
UC	87.5–107.9MHz/200kHz	530–1710kHz/10kHz	The frequency range is selected with Advanced Set Up
RL	87.5–108.0MHz/50kHz	531–1611kHz/9kHz	
	87.5–108.0MHz/100kHz	530–1710kHz/10kHz	
ABG	87.5–108.0MHz/50kHz	531–1611kHz/9kHz	

## ■ AMP ADJUSTMENT


### ● CONFIRMATION OF IDLING CURRENT

1. Right after the power is turned on, confirm that the voltage across the terminals of R137 (L ch) and R138 (R ch) are between 0.1mV to 10.0mV.
2. If the measured voltage exceeds 10.0mV, open (cut off) R131 (L ch), R132 (R ch) and reconfirm the voltage.
3. Confirm that the voltage is between 0.20mV and 15.0mV after 60 minutes.

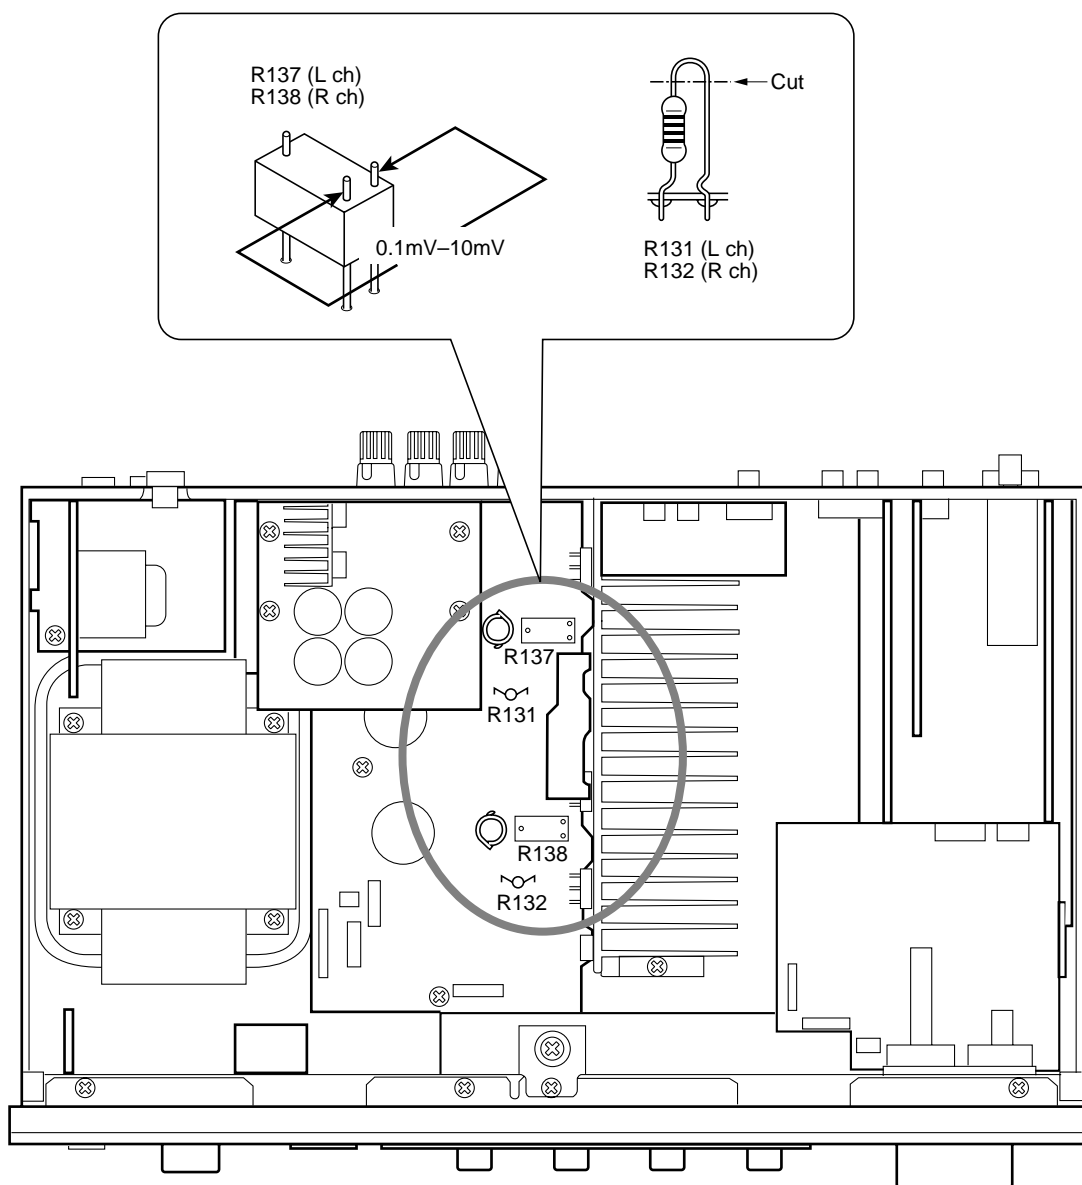



**IC602 : M30626FHPFP (FUNCTION (2) P.C.B.)**  
**16-bit Microprocessor**

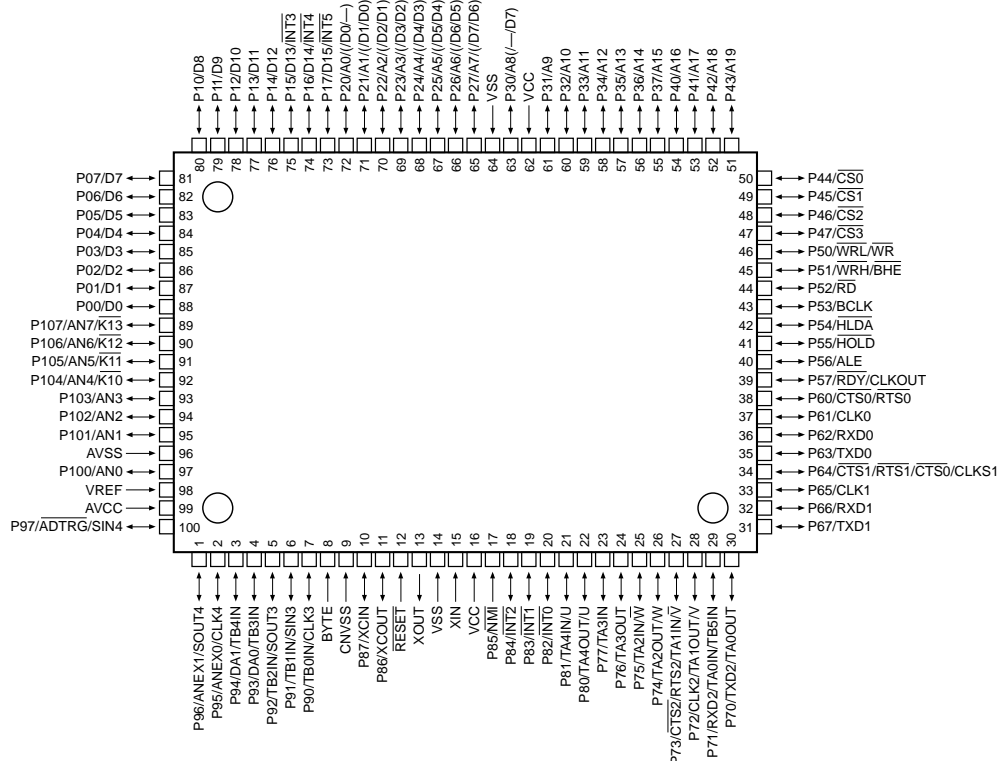


No.	Port	Name	I/O	Function
1	P96/ANEX1	DTFD	O	FL Driver Tx DATA
2	P95/ANEX0	CKFD	O	FL Driver CLOCK
3	P94		O	
4	P93	DEST1	I	Model Distinction 1
5	P92/TB2in	DEST0	I	Model Distinction 0
6	P91/TB1in	MOD1	I	Destination Distinction 1 (Reserve)
7	P90/TB0in	MOD0	I	Destination Distinction 0 (Reserve)
8	BYTE	BYTE	MCU	Vss: when single chip mode is used (Gnd)
9	CNVss	CNVss	MCU	Vss: when single chip mode is used, Vcc: when flash writing is used (PullDown)
10	P87/Xcin	/CEEEP	O	EEPROM CE
11	P86/Xcout	N.C.	O	
12	/RESET	/RESET	MCU	Reset
13	Xout	Xout	MCU	Oscillator Out
14	Vss	Vss	MCU	Ground (Gnd)
15	Xin	Xin	MCU	Oscillator In
16	Vcc1	Vcc	MCU	Power Supply, +5V (Vcc)
17	P85/NMI	NMI	I	Connect to Vcc because it is unused (PullUp)
18	P84/INT2	MPSW	IRQ	MAIN Power SW INT
19	P83/INT1	ZPSW	IRQ	Zone2 Power SW INT
20	P82/INT0	PDET	IRQ	Power Down Detect INT
21	P81	N.C.	O	(LevelConv)
22	P80	N.C.	O	(LevelConv)
23	P77	TRIG	O	Triger OUT (Unconnected)
24	P76	/POMT	O	Pre Out Mute (Unconnected)
25	P75/TA2in	/Z2MT	O	Zone2 Mute
26	P74/TA2out	N.C.	O	
27	P73/CTS2/RTS2/TA1in	XMPWR	O	XM/DT BUS POWER CONTROL
28	P72/CLK2/TA1out	/ICXM	O	DABIC IC Reset
29	P71/RXD2/SCL2/TA0in	DRXM	SI	DABIC IC RxD (LevelConv)
30	P70/TXD2/SDA2/TA0out	DTXM	SO	DABIC IC TxD (LevelConv)
31	P67/TXD1/SDA1	DTEV	SO	Zone2Volume Tx DATA(YAC526) (Unconnected)
		TXDF	SO	Data Transmit Terminal for AF220
32	P66/RXD1/SCL1	CEEV	O	Zone2Volume CE(YAC526) (Unconnected)
		RXDF	SO	Flash ROM RxD
33	P65/CLK1	CKEV	SO	Zone2Volume CLOCK(YAC526) (Unconnected)
		CLKF	SO	Clock Transmit Terminal for AF220

**IC602 : M30626FHPFP (FUNCTION (2) P.C.B.)**  
**16-bit Microprocessor**

No.	Port	Name	I/O	Function
34	P64/CTS1/RTS1/CTS0/CLKS1	BSY	O	AF220 BUSY Signal Output
35	P63/TXD0/SDA0	DTIS	SO	Input Selector Tx DATA
36	P62/RXD0/SCL0	CEIS	O	Input Selector CE
37	P61/CLK0	CKIS	SO	Input Selector CLOCK
38	P60/CTS0/RTS0	DTRZ	O	Rec/Zone2 selector DATA
39	P57/RDY/CLKout	CKRZ	O	Rec/Zone2 selector CLOCK
40	P56	N.C.	O	
41	P55	/EMP	I	For Flash Writing (LO) (PullDown)
42	P54	CER	O	RDS CE
43	P53	SCKR	O	RDS CLOCK
44	P52	SDRR	I	RDS Rx DATA
45	P51	SDTR	O	RDS Tx DATA
46	P50	/CE	I	For Flash Writing (HI) (PullUp)
47	P47	CEP	O	TUNER CE
48	P46	SCKP	O	TUNER CLOCK
49	P45	SDTP	O	TUNER Tx DATA
50	P44	/TMU	O	TUNER MUTE
51	P43	SDRP	I+	TUNER Rx DATA
52	P42	TUNED	I+	TUNER TUNED
53	P41	/ST	I+	TUNER /ST
54	P40	N.C.	O	
55	P37	VIA	O	Video Input SelectorA (PullDown)
56	P36	VIB	O	Video Input SelectorB (PullDown)
57	P35	/VR	O	Video Rec Mute (PullDown)
58	P34	VRB	O	Video Rec SelectorB (Unconnected)
59	P33	VZA	O	VIDEO Zone2 SelectorA (Unconnected)
60	P32	VZB	O	VIDEO Zone2 SelectorB (Unconnected)
61	P31	/SWMT	O	Sub Woofer Mute
62	Vcc2	Vcc	MCU	Power Supply, +5V (Vcc)
63	P30	/CDMT	O	CD Direct Mute (Unconnected)
64	Vss	Vss	MCU	Ground (Gnd)
65	P27	/MIMT	O	Main IN Mute
66	P26	PDon	I+	Pure Direct ON Detect
67	P25	CDOn	I+	Tape Monitor Key
68	P24	PLED	O	Pure Direct LED
69	P23	CLED	O	CD Direct/TapeMonitor LED
70	P22	PRY	O	Power Relay
71	P21	N.C.	O	
72	P20	HPRY	O	Head Phone Play
73	P17	PDET	IRQ	Power Down Detect INT
74	P16	SPSW	IRQ	SYSTEM Power SW INT(MasterPower)
75	P15	REM	IRQ	Remote Controler INT
76	P14	FBRY	O	Front B Speaker Relay
77	P13	FARY	O	Front A Speaker Relay
78	P12	VRup	O	Volume Up
79	P11	VRdn	O	Volume Down
80	P10	PRI	I	I Protection
81	P07	/PSV	O	Power save mode
82	P06	N.C.	O	
83	P05	/BLK	O	FL Driver /BLK
84	P04	ISA	I	Input Selector A (PullUp)
85	P03	ISB	I	Input Selector B (PullUp)
86	P02	LSBY	O	StandBy LED (Unconnected)
87	P01	N.C.	O	
88	P00	N.C.	O	
89	P107/AN7/KI3	REC	AD	Rec/Zone2 selector (Unconnected)
90	P106/AN6/KI2	PRV	AD	PS Protection (PullUp)
91	P105/AN5/KI1	PRD	AD	DC Protection (PullUp)
92	P104/AN4/KI0	THML	AD	THM L Protection (Unconnected)
93	P103/AN3	THMR	AD	THM R Protection (PullUp)
94	P102/AN2	KEY0	AD	AD Key 0
95	P101/AN1	KEY1	AD	AD Key 1
96	Avss	Avss	MCU	AD Ground (Gnd)
97	P100/AN0	DEST	AD	Destination Detect
98	Vref	Vref	MCU	AD Reference (Vcc)
99	Avcc	Avcc	MCU	AD Power Supply (Vcc)
100	P97/Adtrg	CEFD	O	FL Driver CE

■ DISPLAY DATA

V801 : 15-BT-105GNK (WF519900)

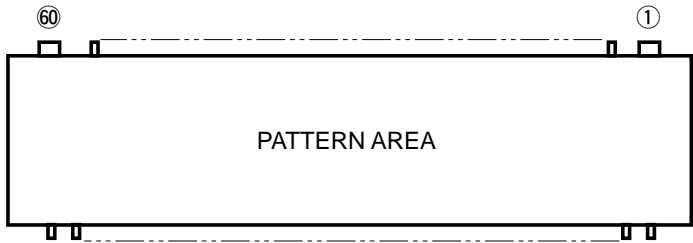


● PIN CONNECTION

PIN NO.	5	4	4	4	4	4	4	4	4	3	3	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	1	1	1	1	1	1	1	1	1	0	9	8	7	6	5	4	3	2	1
CONNECTION	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	N	N	5	4	3	2	1	0	9	8	7	6	5	4	3	2	1		
	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1

PIN NO.	6	5	5	5	5	5	5	5	5
CONNECTION	F	N	N	N	P	P	P	P	P
	2	X	P	P	1	2	3	4	5

- Note 1) F1, F2 ..... Filament  
2) NP ..... No Pin  
3) NX ..... No Extend Pin  
4) P1~P35 ..... Datum Line  
5) 1G~15G ..... Grid

● GRID ASSIGNMENT

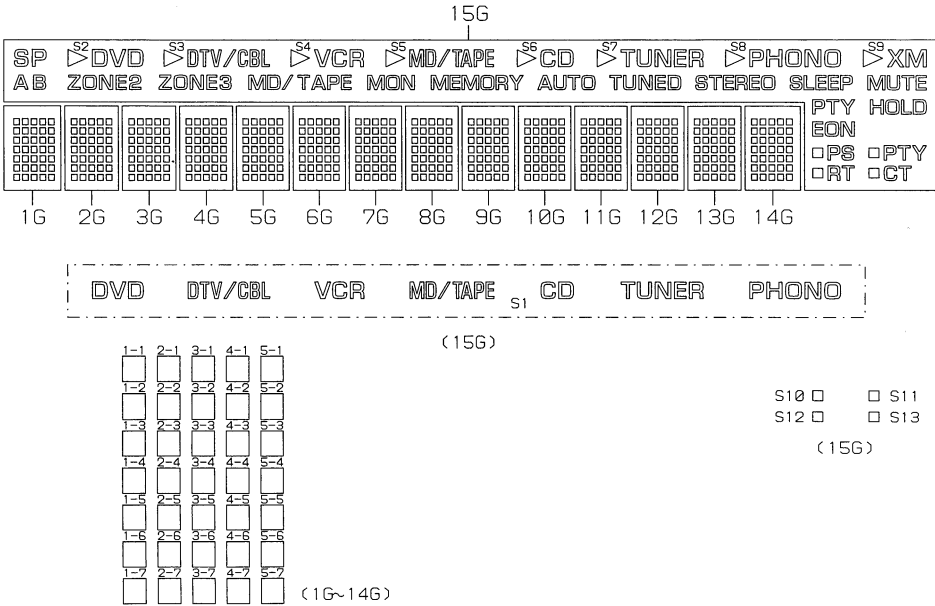


● ANODE CONNECTION

	1G~14G	15G
P1	1-1	SP
P2	2-1	A
P3	3-1	B
P4	4-1	ZONE2
P5	5-1	ZONE3
P6	1-2	MD/
P7	2-2	TAPE MON
P8	3-2	AUTO
P9	4-2	TUNED
P10	5-2	STEREO
P11	1-3	MEMORY
P12	2-3	SLEEP
P13	3-3	PTY HOLD
P14	4-3	EON
P15	5-3	S10
P16	1-4	S11
P17	2-4	S12
P18	3-4	S13
P19	4-4	PS
P20	5-4	PTY
P21	1-5	RT
P22	2-5	CT
P23	3-5	S2
P24	4-5	S3
P25	5-5	S4
P26	1-6	S5
P27	2-6	S6
P28	3-6	S7
P29	4-6	S8
P30	5-6	S9
P31	1-7	S1
P32	2-7	XM
P33	3-7	MUTE
P34	4-7	-
P35	5-7	-


## PIN CONNECTION DIAGRAM

### ICs


LM61CIZ




NJU7201L55




NJM7805FA




PQ05RD11




μPC29M33T-E1




TLP421




TC4013BP




SN74AHC1G32DCK




NE5532DR




NJM2068MD




AK4384ET




SN74LV245APWR




LC72722PM




NJU7313AM




BD3841FS




LA7956




LB1641



F2602E-01



M66003-0131FP




M30626FHPFP




### Diodes



1SS355  
1SS380  
MA8056-M  
MA8075-H  
MA8051-M  
MA8120-H  
UDZ5.1B  
UDZS3.0BTE-17  
AVRL161A1R1NTB  
RB500V-40  
UDZS22BTE-17




1SS133  
1SS270A  
1SR139  
1T2  
MTZJ16A  
MTZJ6.8B  
MTZJ10B  
MTZJ9.1B  
MTZJ6.2B  
MTZJ3.0A  
MTZJ27B



KBP103G


S1NB20  
S1NB60

S4VB20




### Transistors


2SC2412K (Q, R, S)  
2SD1938F (S, T)  
DTC144EKA  
2SA1037K (Q, R, S)




2SA1708 (S, T)  
2SC4488 (S, T)




2SC1740S (Q, R, S)  
DTC144ESA-TP




2SA1015 (Y)  
2SC1815 (Y)  
2N5401C-AT  
2N5551C-AT  
2SC2229 (O, Y)  
2SA970 (GR, BL)  
2SB647 (C, D)



2SD2375 (Q, P)




2SC4495




### Transistors

2SA1695 (O, P, Y)  
2SC4468 (O, P, Y)  
2SA2151 (O, P, Y)  
2SC6011 (O, P, Y)



### FETs


2SK30ATM  
2SK3850





PRINTED CIRCUIT BOARD

FUNCTION (2) P.C.B. (Side A)

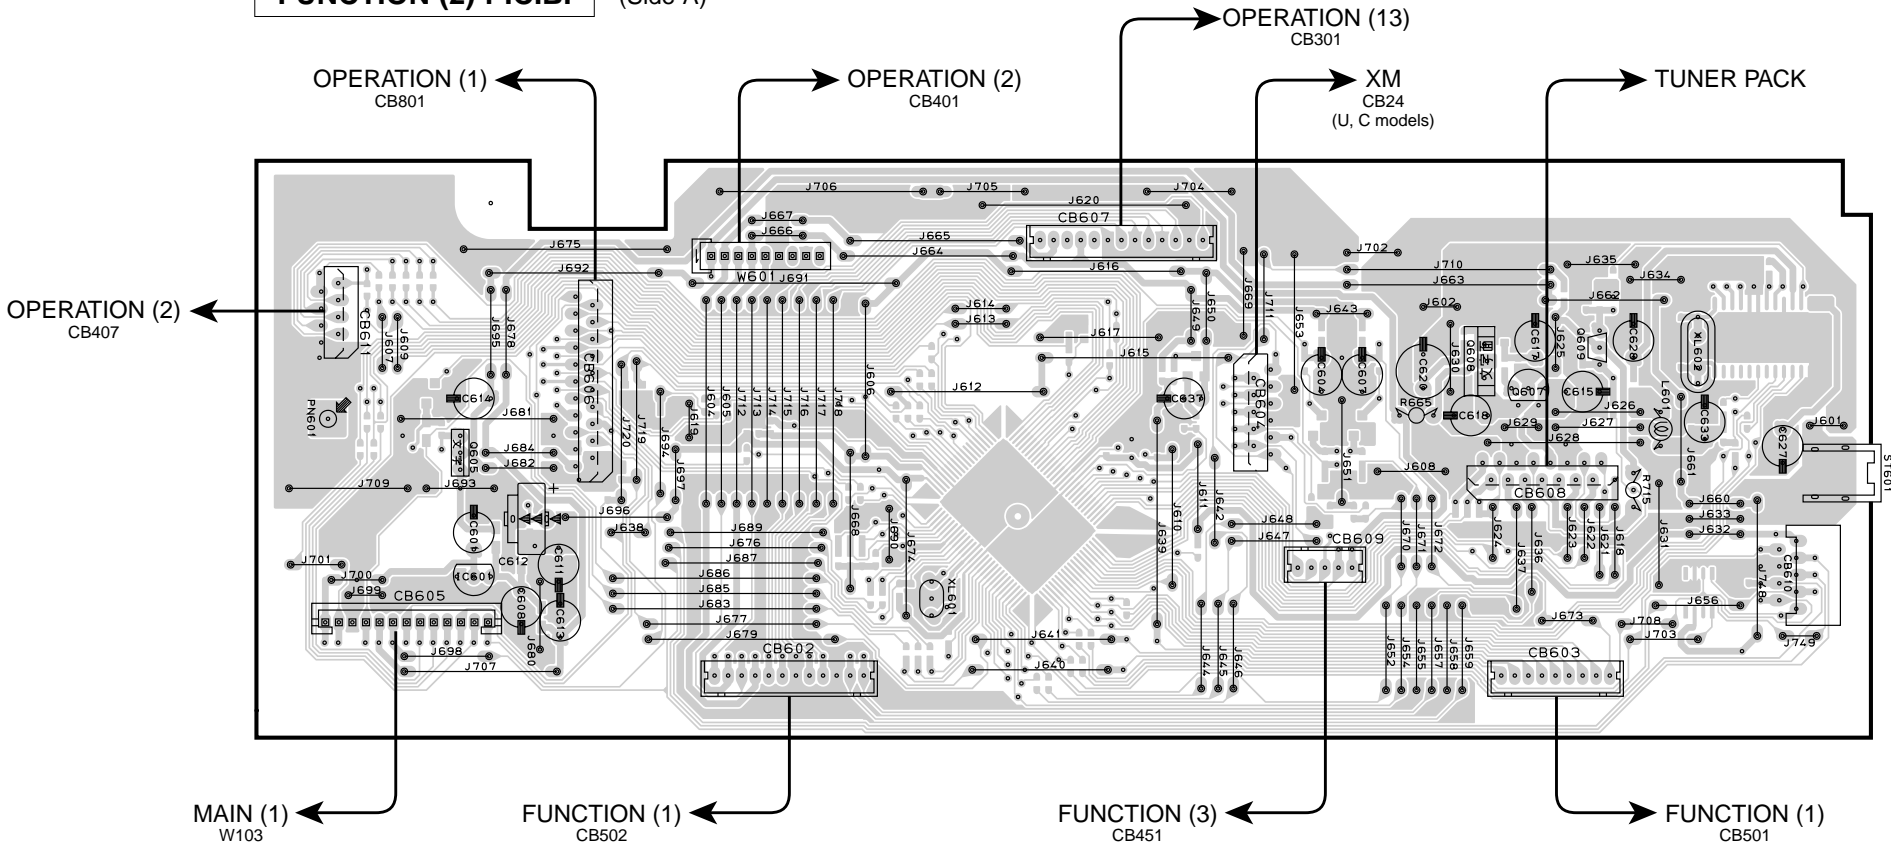


FUNCTION (2)


Circuit No.	U, C	R, L	A	G, E
CB604	O	X	X	X
R679, 681, 683, 686	O	X	X	X
R687, 688	O	X	X	X
R601	X	O	O	O
IC603	X	X	X	O
XL602	X	X	X	O
C630, 632	X	X	X	O
C622, 623	X	X	X	O
C629	X	X	X	O
C621, 631	X	X	X	O
C627, 628, 633	X	X	X	O
R698	X	X	X	O
R710, 711	X	X	X	O
R684	X	X	X	O
R714, 717	X	X	X	O
R688	X	X	X	O
R678	X	X	X	O
R677	X	X	X	O
L601	X	X	X	O
Q609	X	X	X	O

X: NOT USED  
O: USED/APPLICABLE

FUNCTION (2) P.C.B. (Side B) Lead Free Solder Used

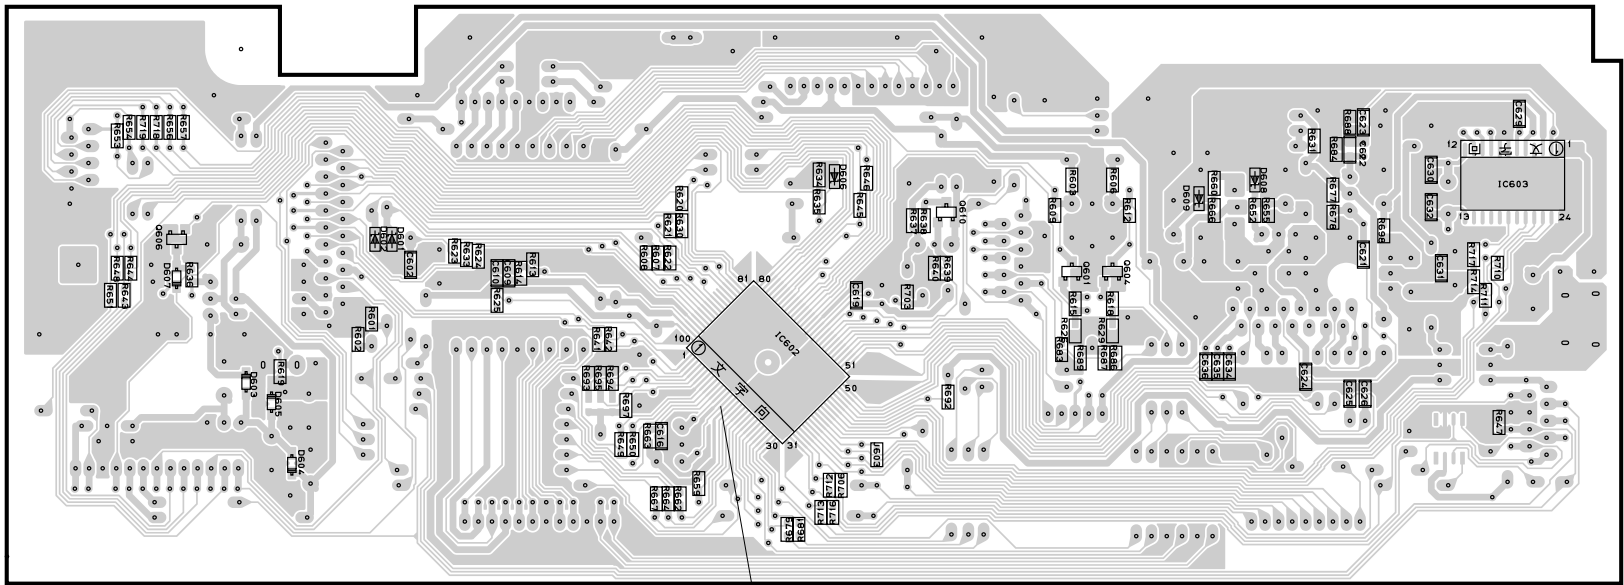

Point ① (Pin 13 of IC602)










## ■ PRINTED CIRCUIT BOARD


## OPERATION (5) P.C.B.

(Side A)

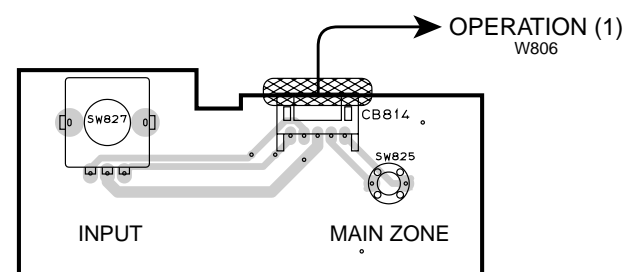


## OPERATION (7) P.C.B.

(Side A)

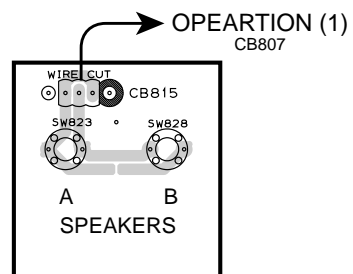


## OPERATION (8) P.C.B.

(Side A)

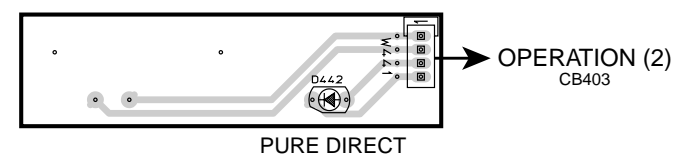


## OPERATION (9) P.C.B.

(Side A)

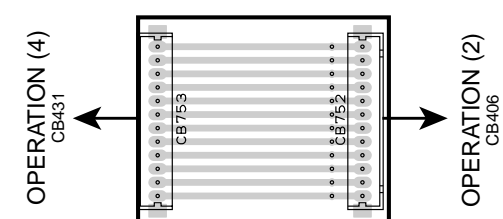


## OPERATION (6) P.C.B.

(Side A)

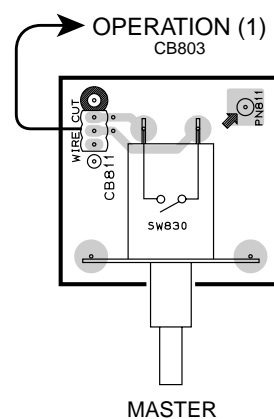


## OPERATION (7) P.C.B.

(Side B) Lead Free Solder Used



## OPERATION (13) P.C.B.

(Side A)

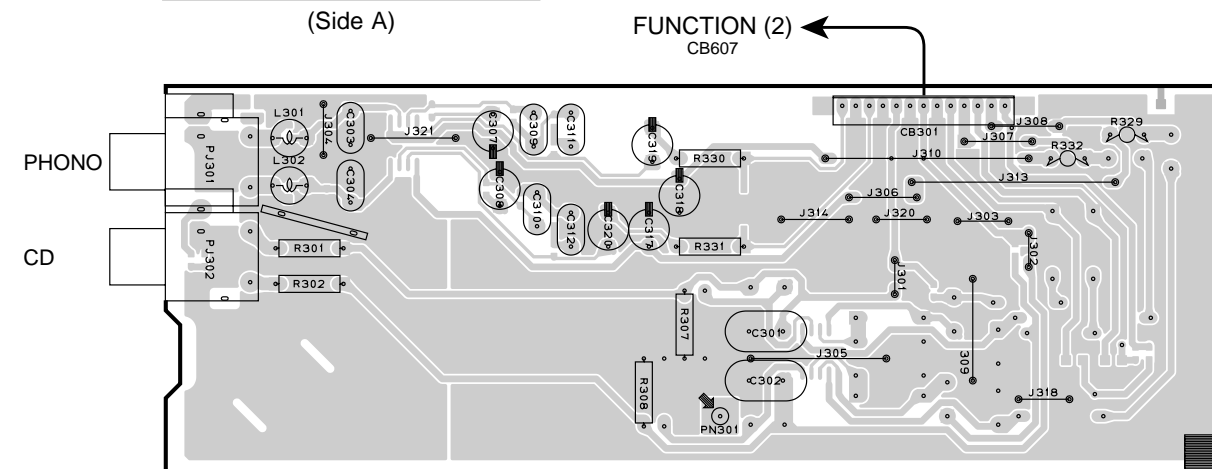

PRINTED CIRCUIT BOARD Lead Free Solder Used

MAIN (1) P.C.B.

(Side A)

MAIN (1)

Circuit No.	A, G, E, L	U, C, R
C156-159, 161, 162	O	X

X: NOT USED


O: USED/APPLICABLE

MAIN (5) P.C.B.



(Side A)

MAIN (3) P.C.B.


(Side A)

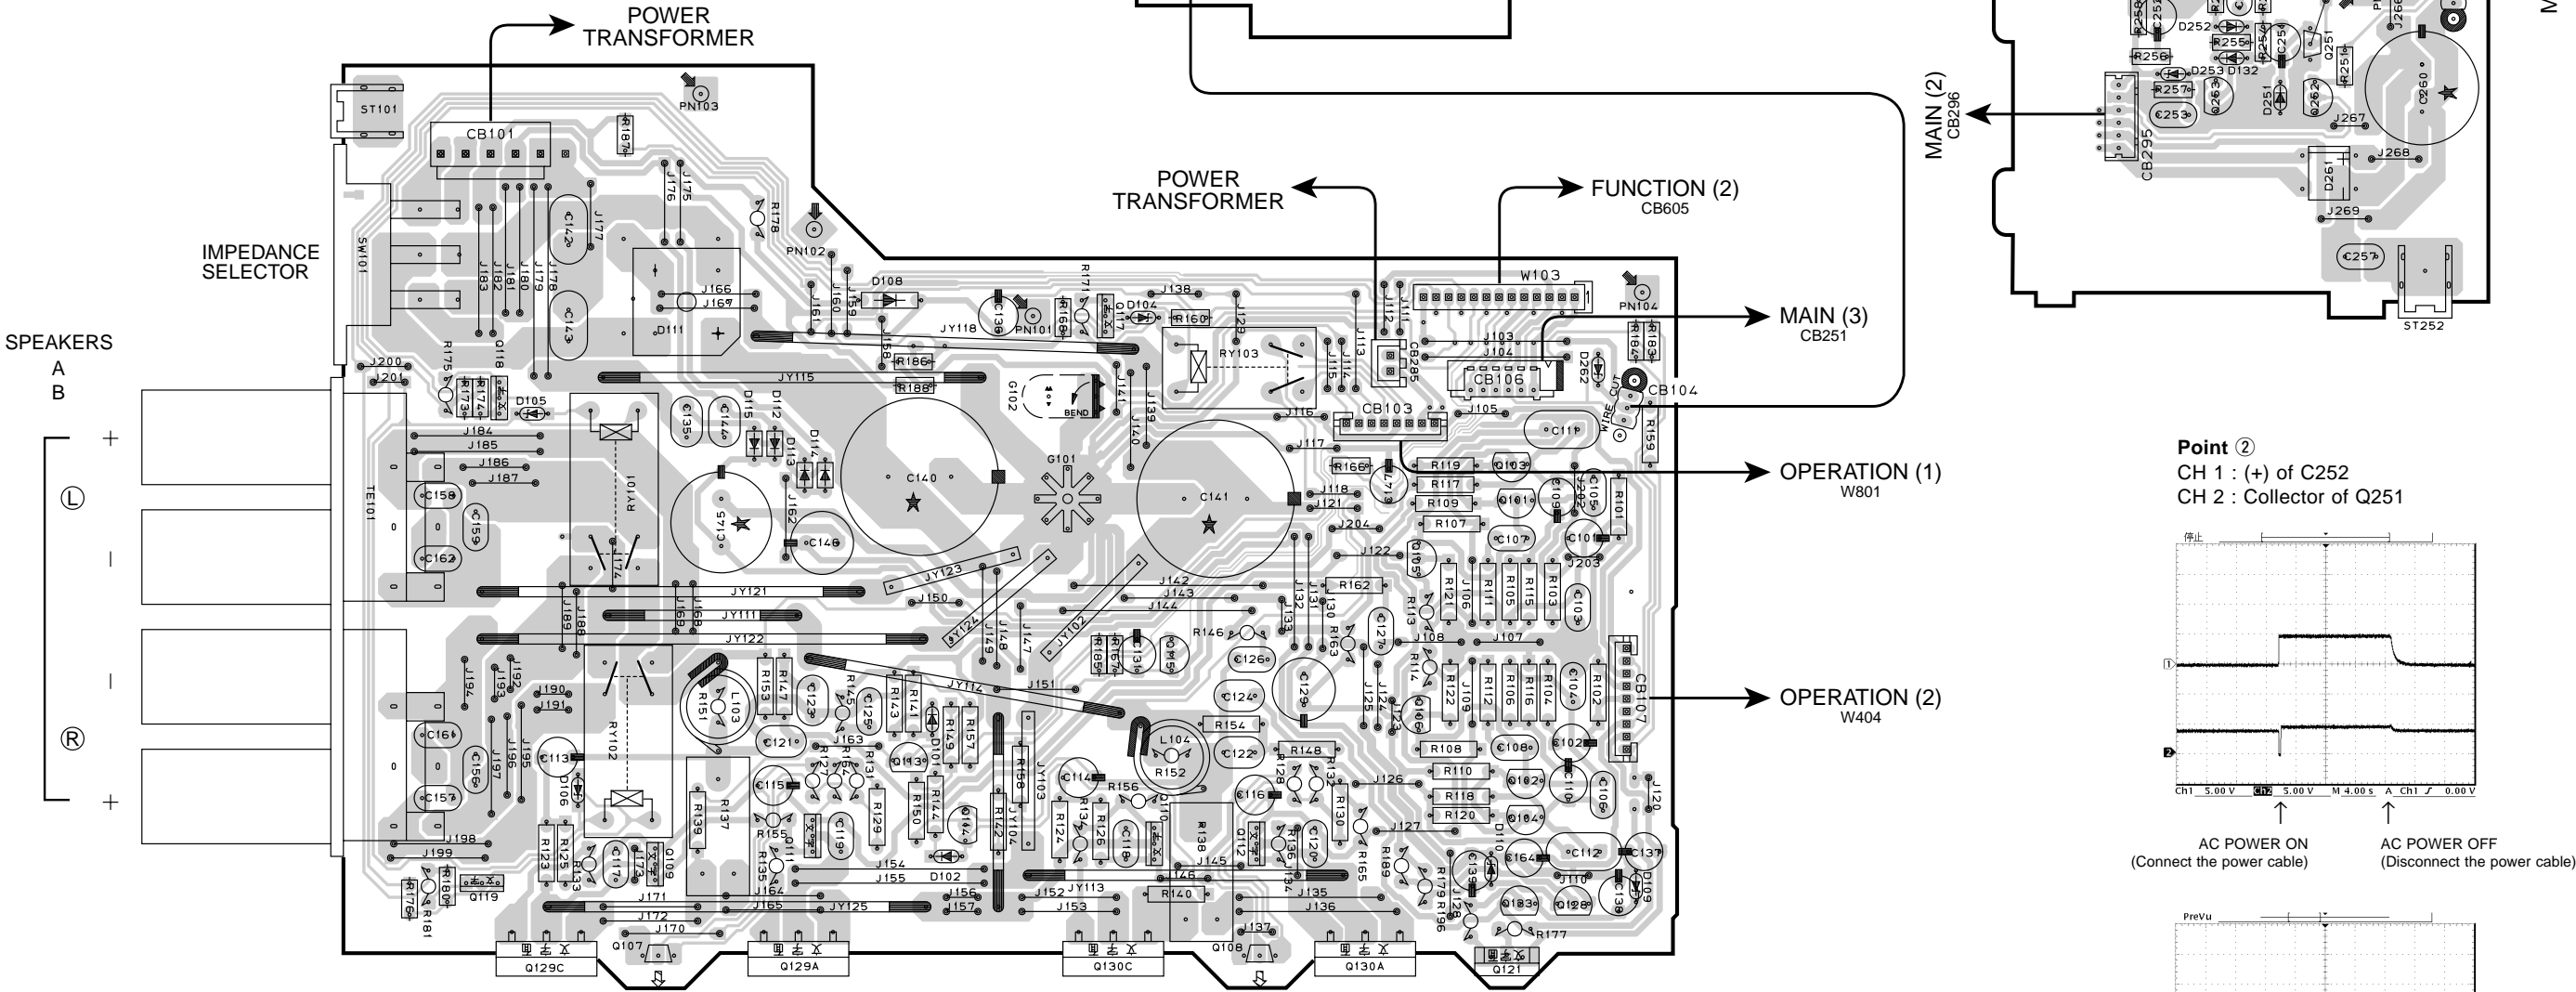

Point ②  
CH 1 : (+) of C252  
CH 2 : Collector of Q251

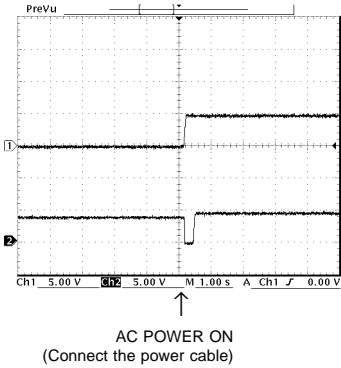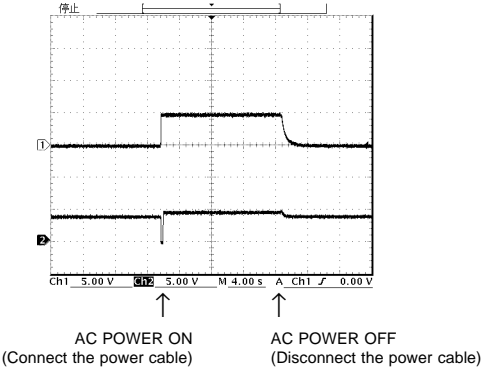

PRINTED CIRCUIT BOARD    Lead Free Solder Used


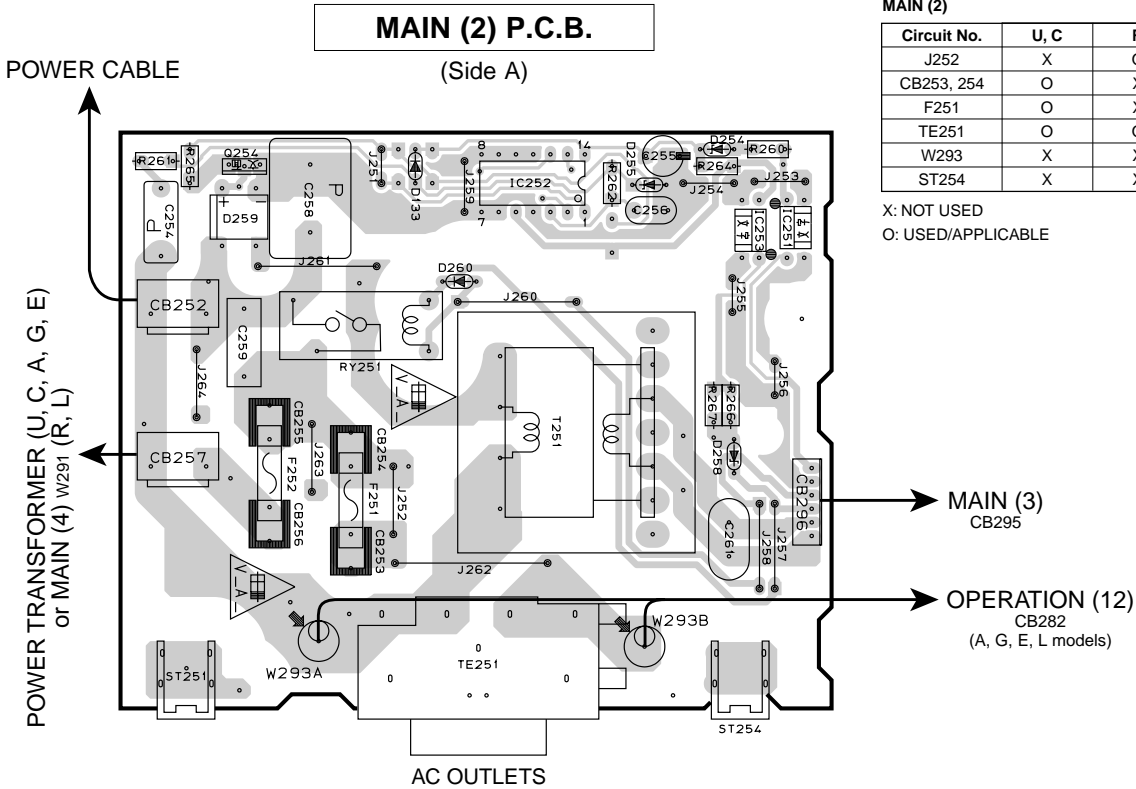


MAIN (2)

Circuit No.	U, C	R	A	G, E	L
J252	X	O	O	X	O
CB253, 254	O	X	X	O	X
F251	O	X	X	O	X
TE251	O	O	X	X	X
W293	X	X	O	O	O
ST254	X	X	O	O	O


X: NOT USED  
O: USED/APPLICABLE

**XM P.C.B.** (Side A) Lead Free Solder Used

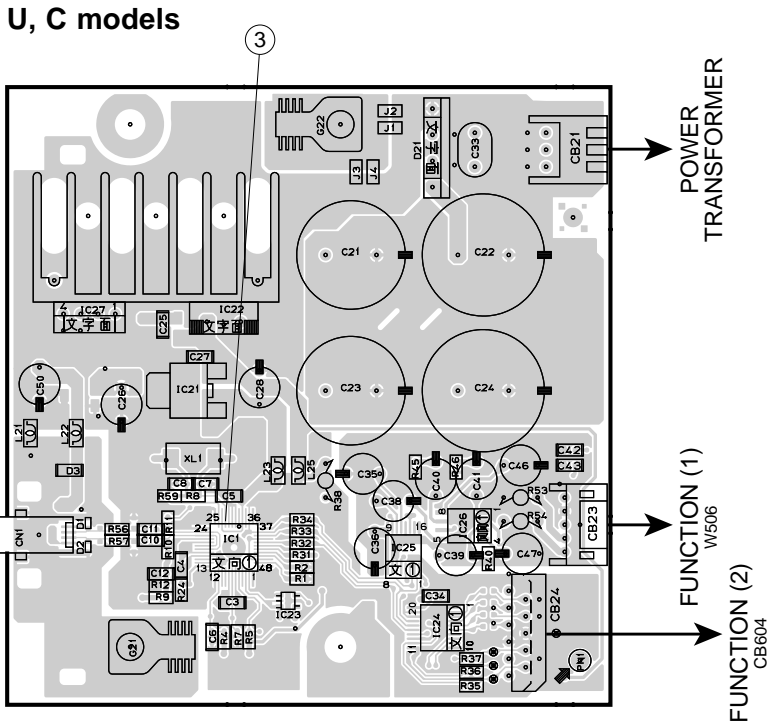

**MAIN (4) P.C.B.** (Side A)

R, L models

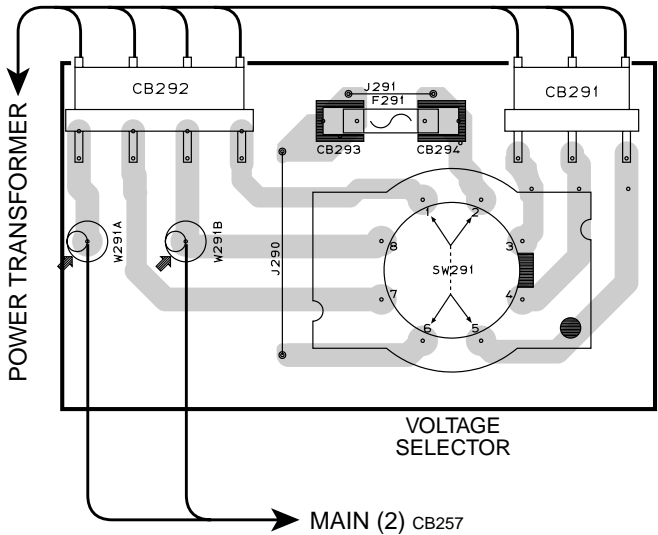

MAIN (4)

Circuit No.	R	L
CB293, 294	O	X
F291	O	X
J291	X	O


X: NOT USED  
O: USED/APPLICABLE

VOLTAGE SELECTOR SW291


240V	1-2/5-6
220V	2-3/6-7
110V	3-4/7-8
120V	4-5/8-1

**XM P.C.B.** (Side B) Lead Free Solder Used


U, C models

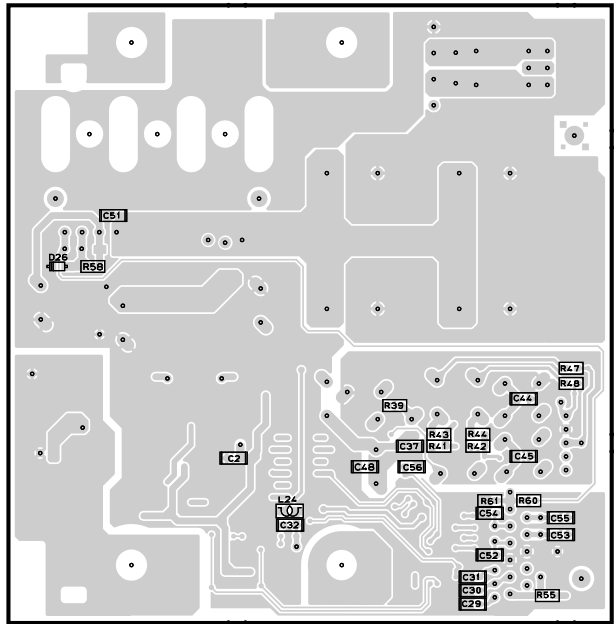

## ■ BLOCK DIAGRAM

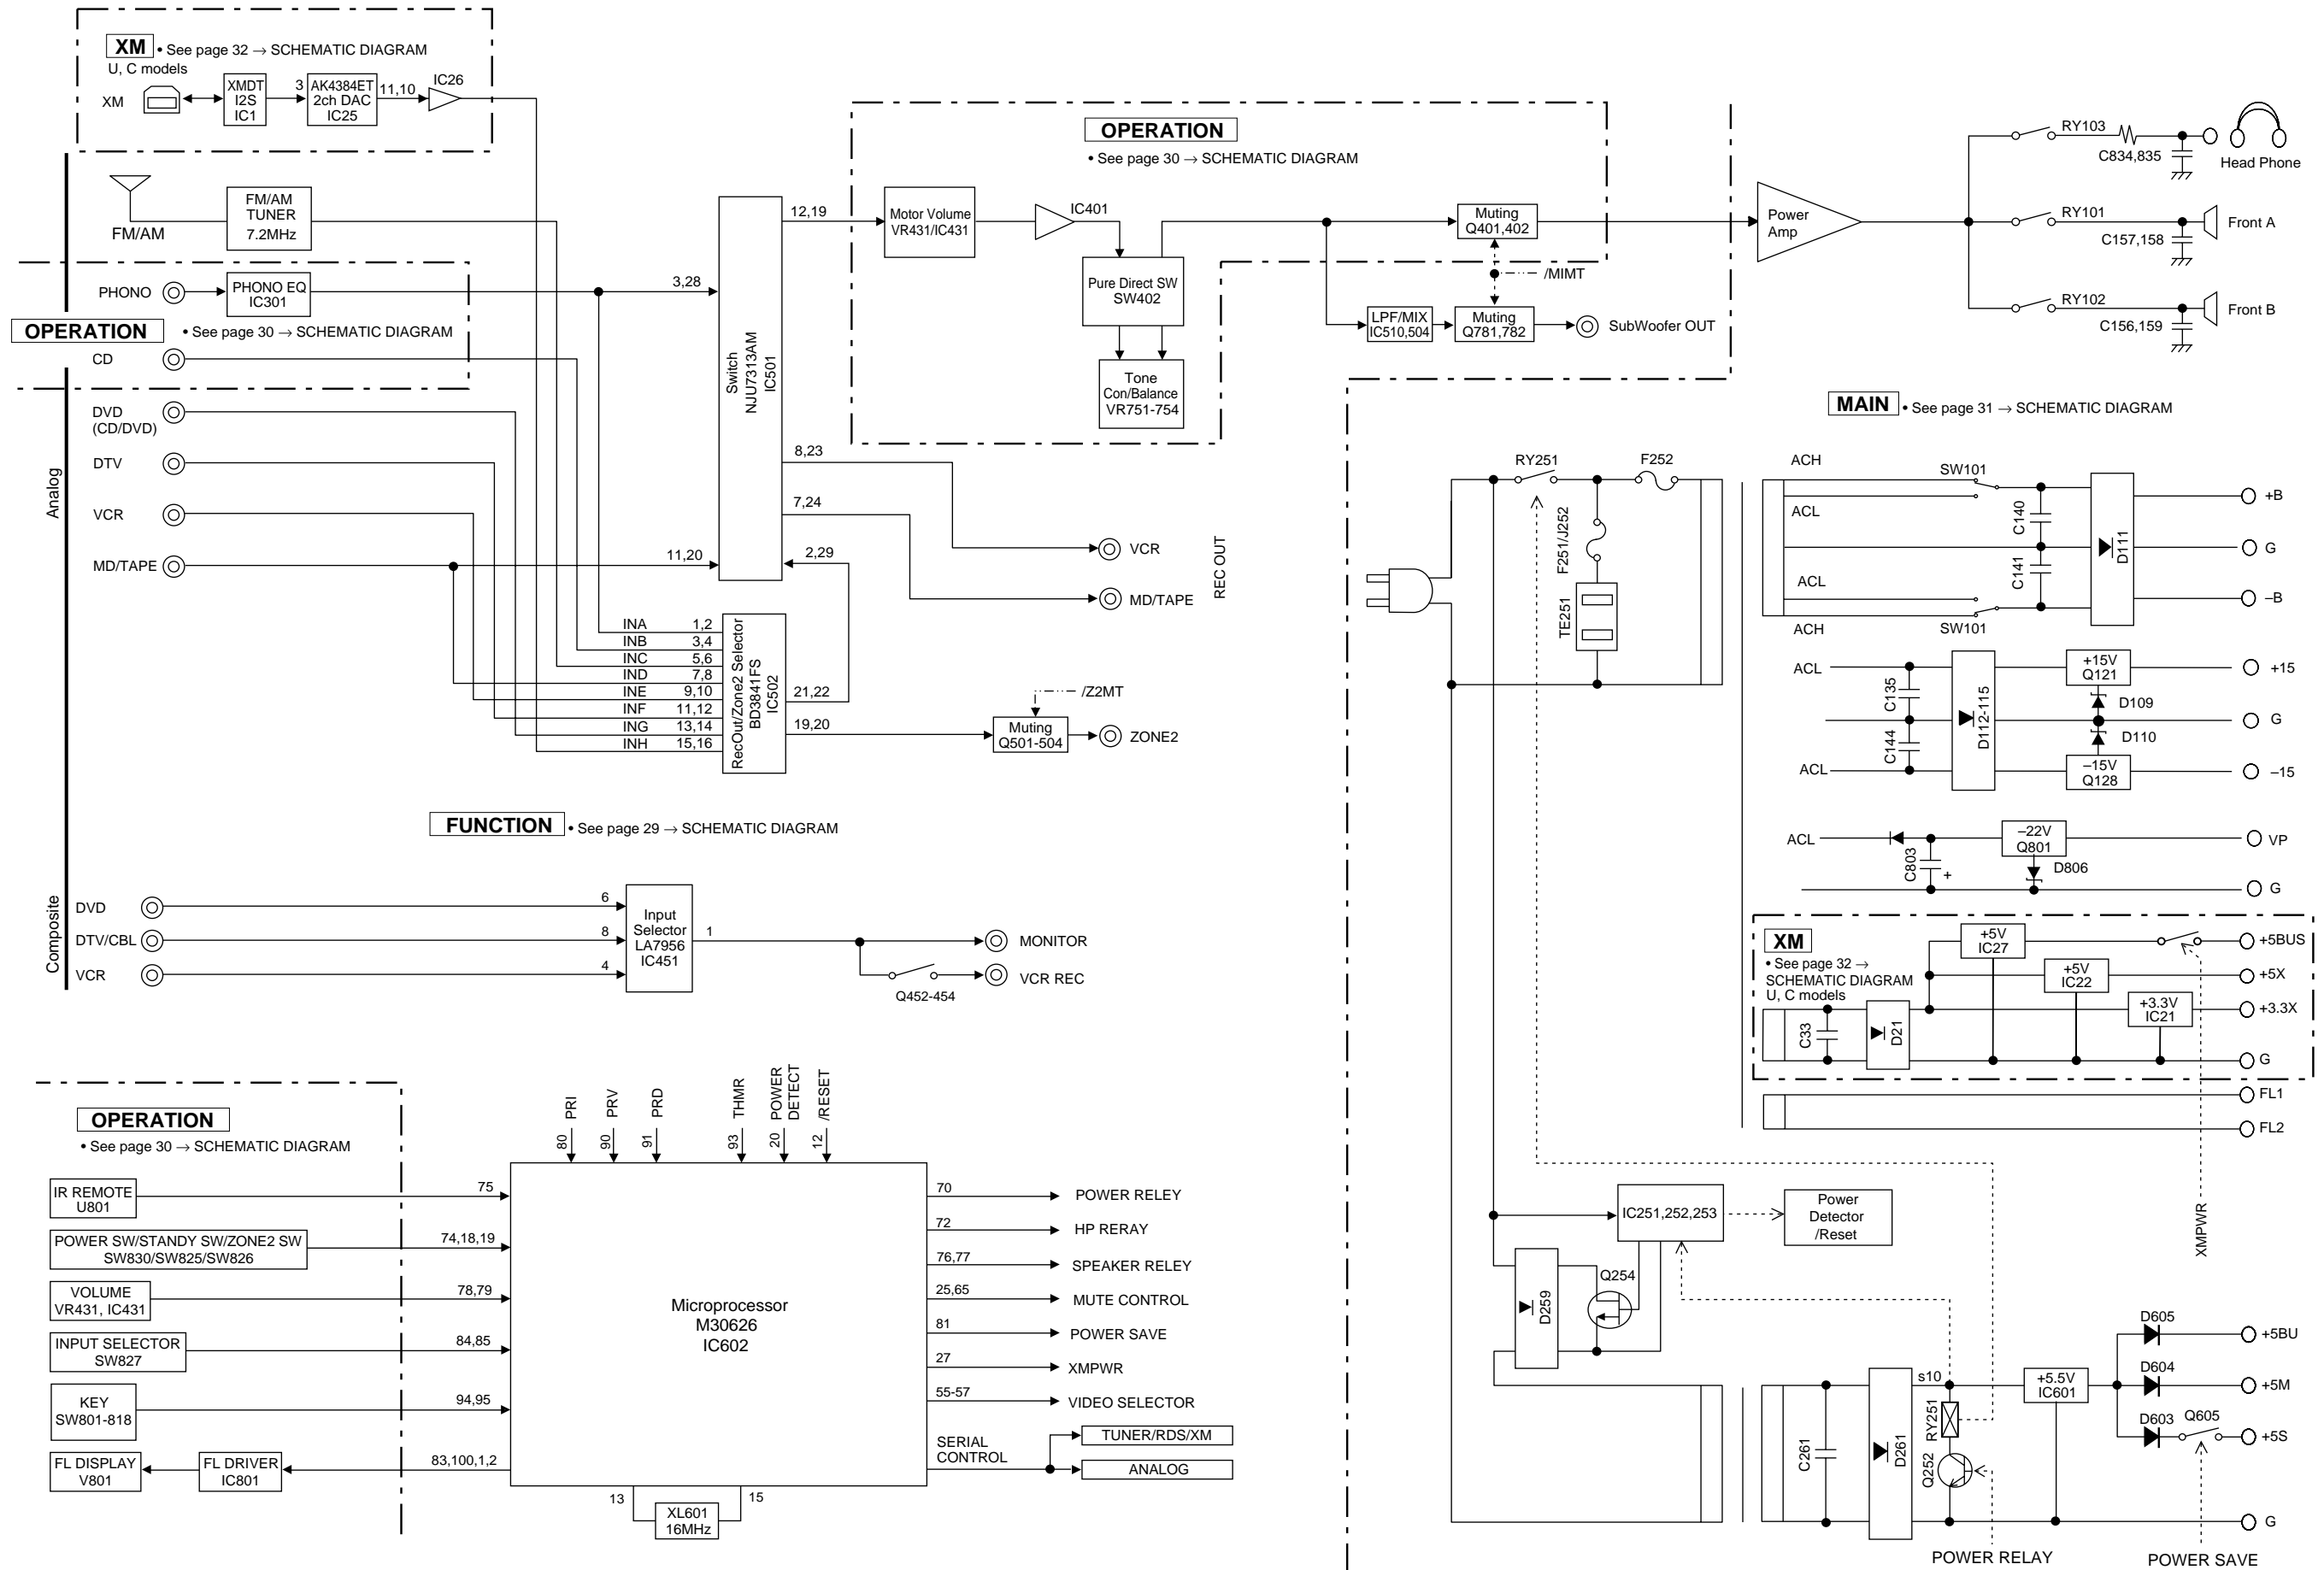

SCHEMATIC DIAGRAM (FUNCTION)

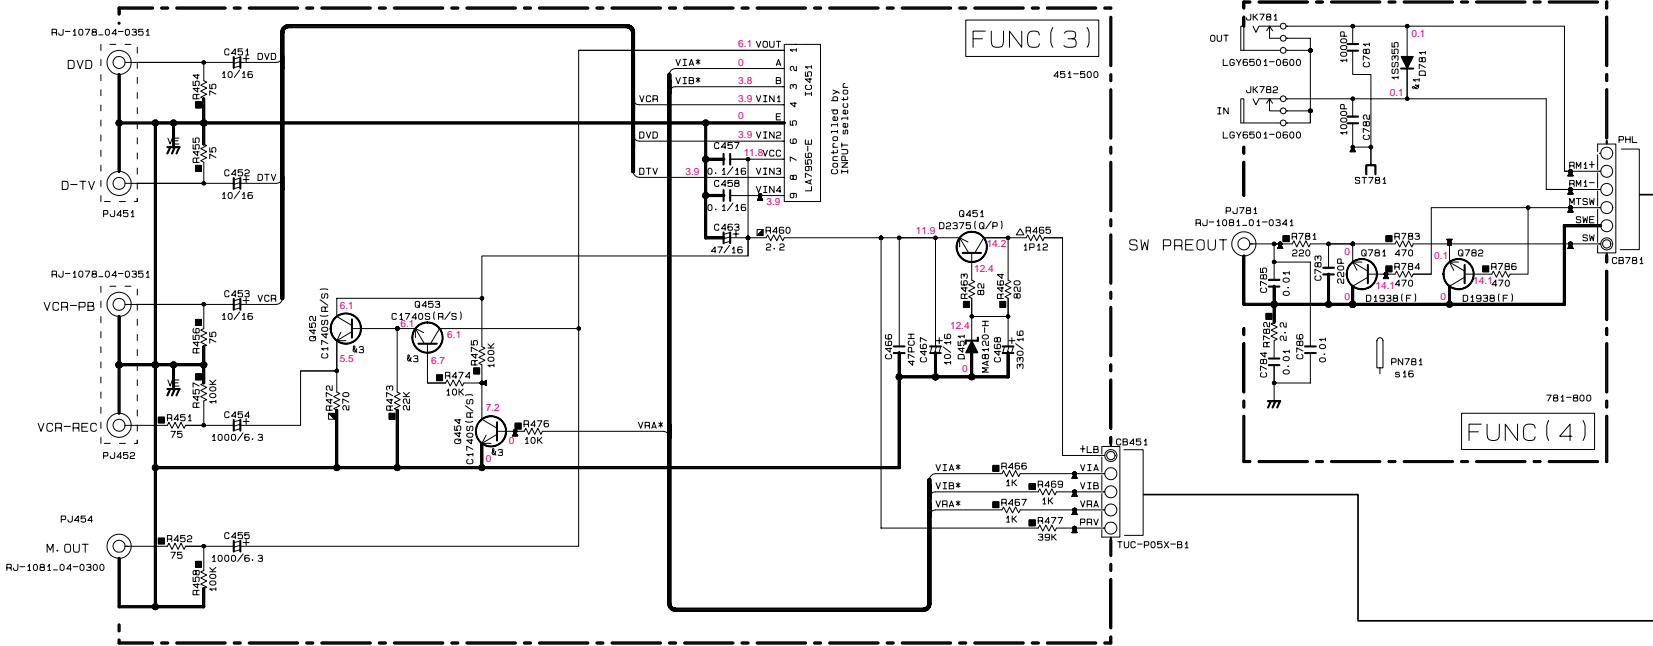

Mark	Reference Parts Number	Parts Name
A1	0603-604-607	M411
D781	0603-604-607	M411
A2	0601-604-610	25A1037AK1G/R/S
A3	0452-454-609	25S1746S1G/R/S
A4	0506	25S3311A1G/R/S
A5	0505-607	25C1815V1
A6	0506	25C1815V1
A7		KT3198
A8		KT3198
A9		KT3198
A10		KT3198
A11		KT3198
A12		KT3198
A13		KT3198
A14		KT3198


NOTICE (model)  
(J)..... JAPAN  
(U)..... U.S.A  
(C)..... CANADA  
(R)..... GENERAL  
(T)..... CHINA  
(K)..... KOREA  
(A)..... AUSTRALIA  
(B)..... BRITISH  
(G)..... EUROPE  
(L)..... SINGAPORE  
(E)..... SOUTH EUROPE  
(V)..... TAIWAN

Mark	Reference Parts Number	Parts Name
A1	0603-604-607	M411
D781	0603-604-607	M411
A2	0601-604-610	25A1037AK1G/R/S
A3	0452-454-609	25S1746S1G/R/S
A4	0506	25S3311A1G/R/S
A5	0505-607	25C1815V1
A6	0506	25C1815V1
A7		KT3198
A8		KT3198
A9		KT3198
A10		KT3198
A11		KT3198
A12		KT3198
A13		KT3198
A14		KT3198


REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
NO MARK	CARBON FILM RESISTOR (P=10)
NO MARK	METAL OXIDE FILM RESISTOR
NO MARK	METAL FILM RESISTOR
NO MARK	METAL PLATE RESISTOR
NO MARK	FIRE PROOF CARBON FILM RESISTOR
NO MARK	CEMENT MOLDED RESISTOR
NO MARK	SEMI-VARIABLE RESISTOR
NO MARK	CHIP RESISTOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
NO MARK	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
NO MARK	CERAMIC TUBULAR CAPACITOR
NO MARK	POLYESTER FILM CAPACITOR
NO MARK	POLYSTYRENE FILM CAPACITOR
NO MARK	MICA CAPACITOR
NO MARK	POLYPROPYLENE FILM CAPACITOR
NO MARK	SEMICONDUCTIVE CERAMIC CAPACITOR


IC451: LA7956 Video Switch

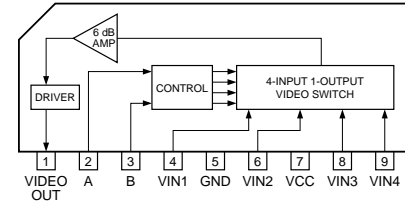


IC501: NJU7313AM Analog Function Switch

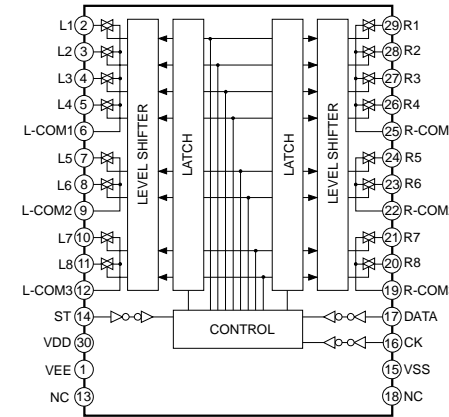


IC502 : BD3841FS Function Switch

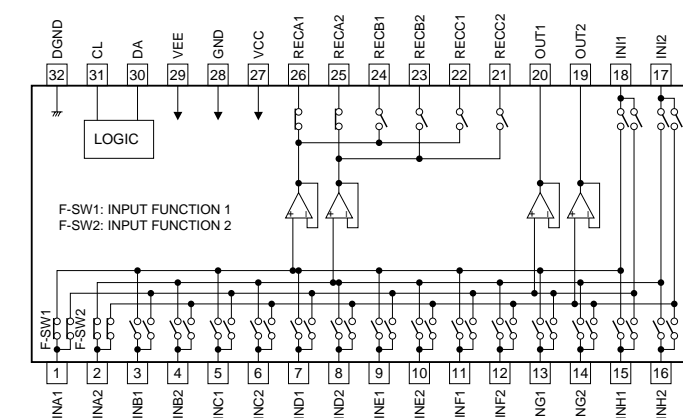


IC504, 510: NJM2068MD-TE Dual OP-Amp

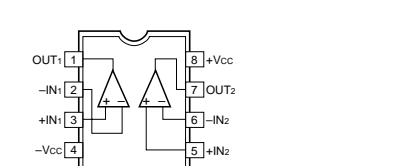

IC603 : LC72722PM RDS Decoder

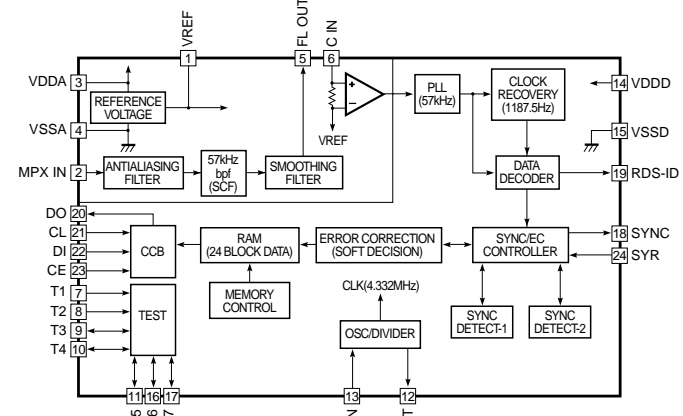

Point ① (Pin 13 of IC602)

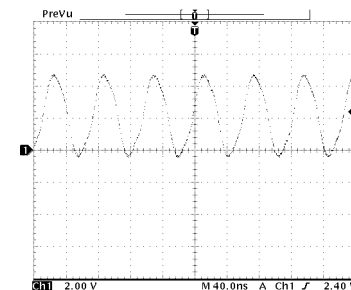

\* All voltages are measured with a 10MΩ/V DC electronic volt meter.  
\* Components having special characteristics are marked with a triangle and must be replaced with parts having specifications equal to those originally installed.  
\* Schematic diagram is subject to change without notice.










■ SCHEMATIC DIAGRAM (XM)

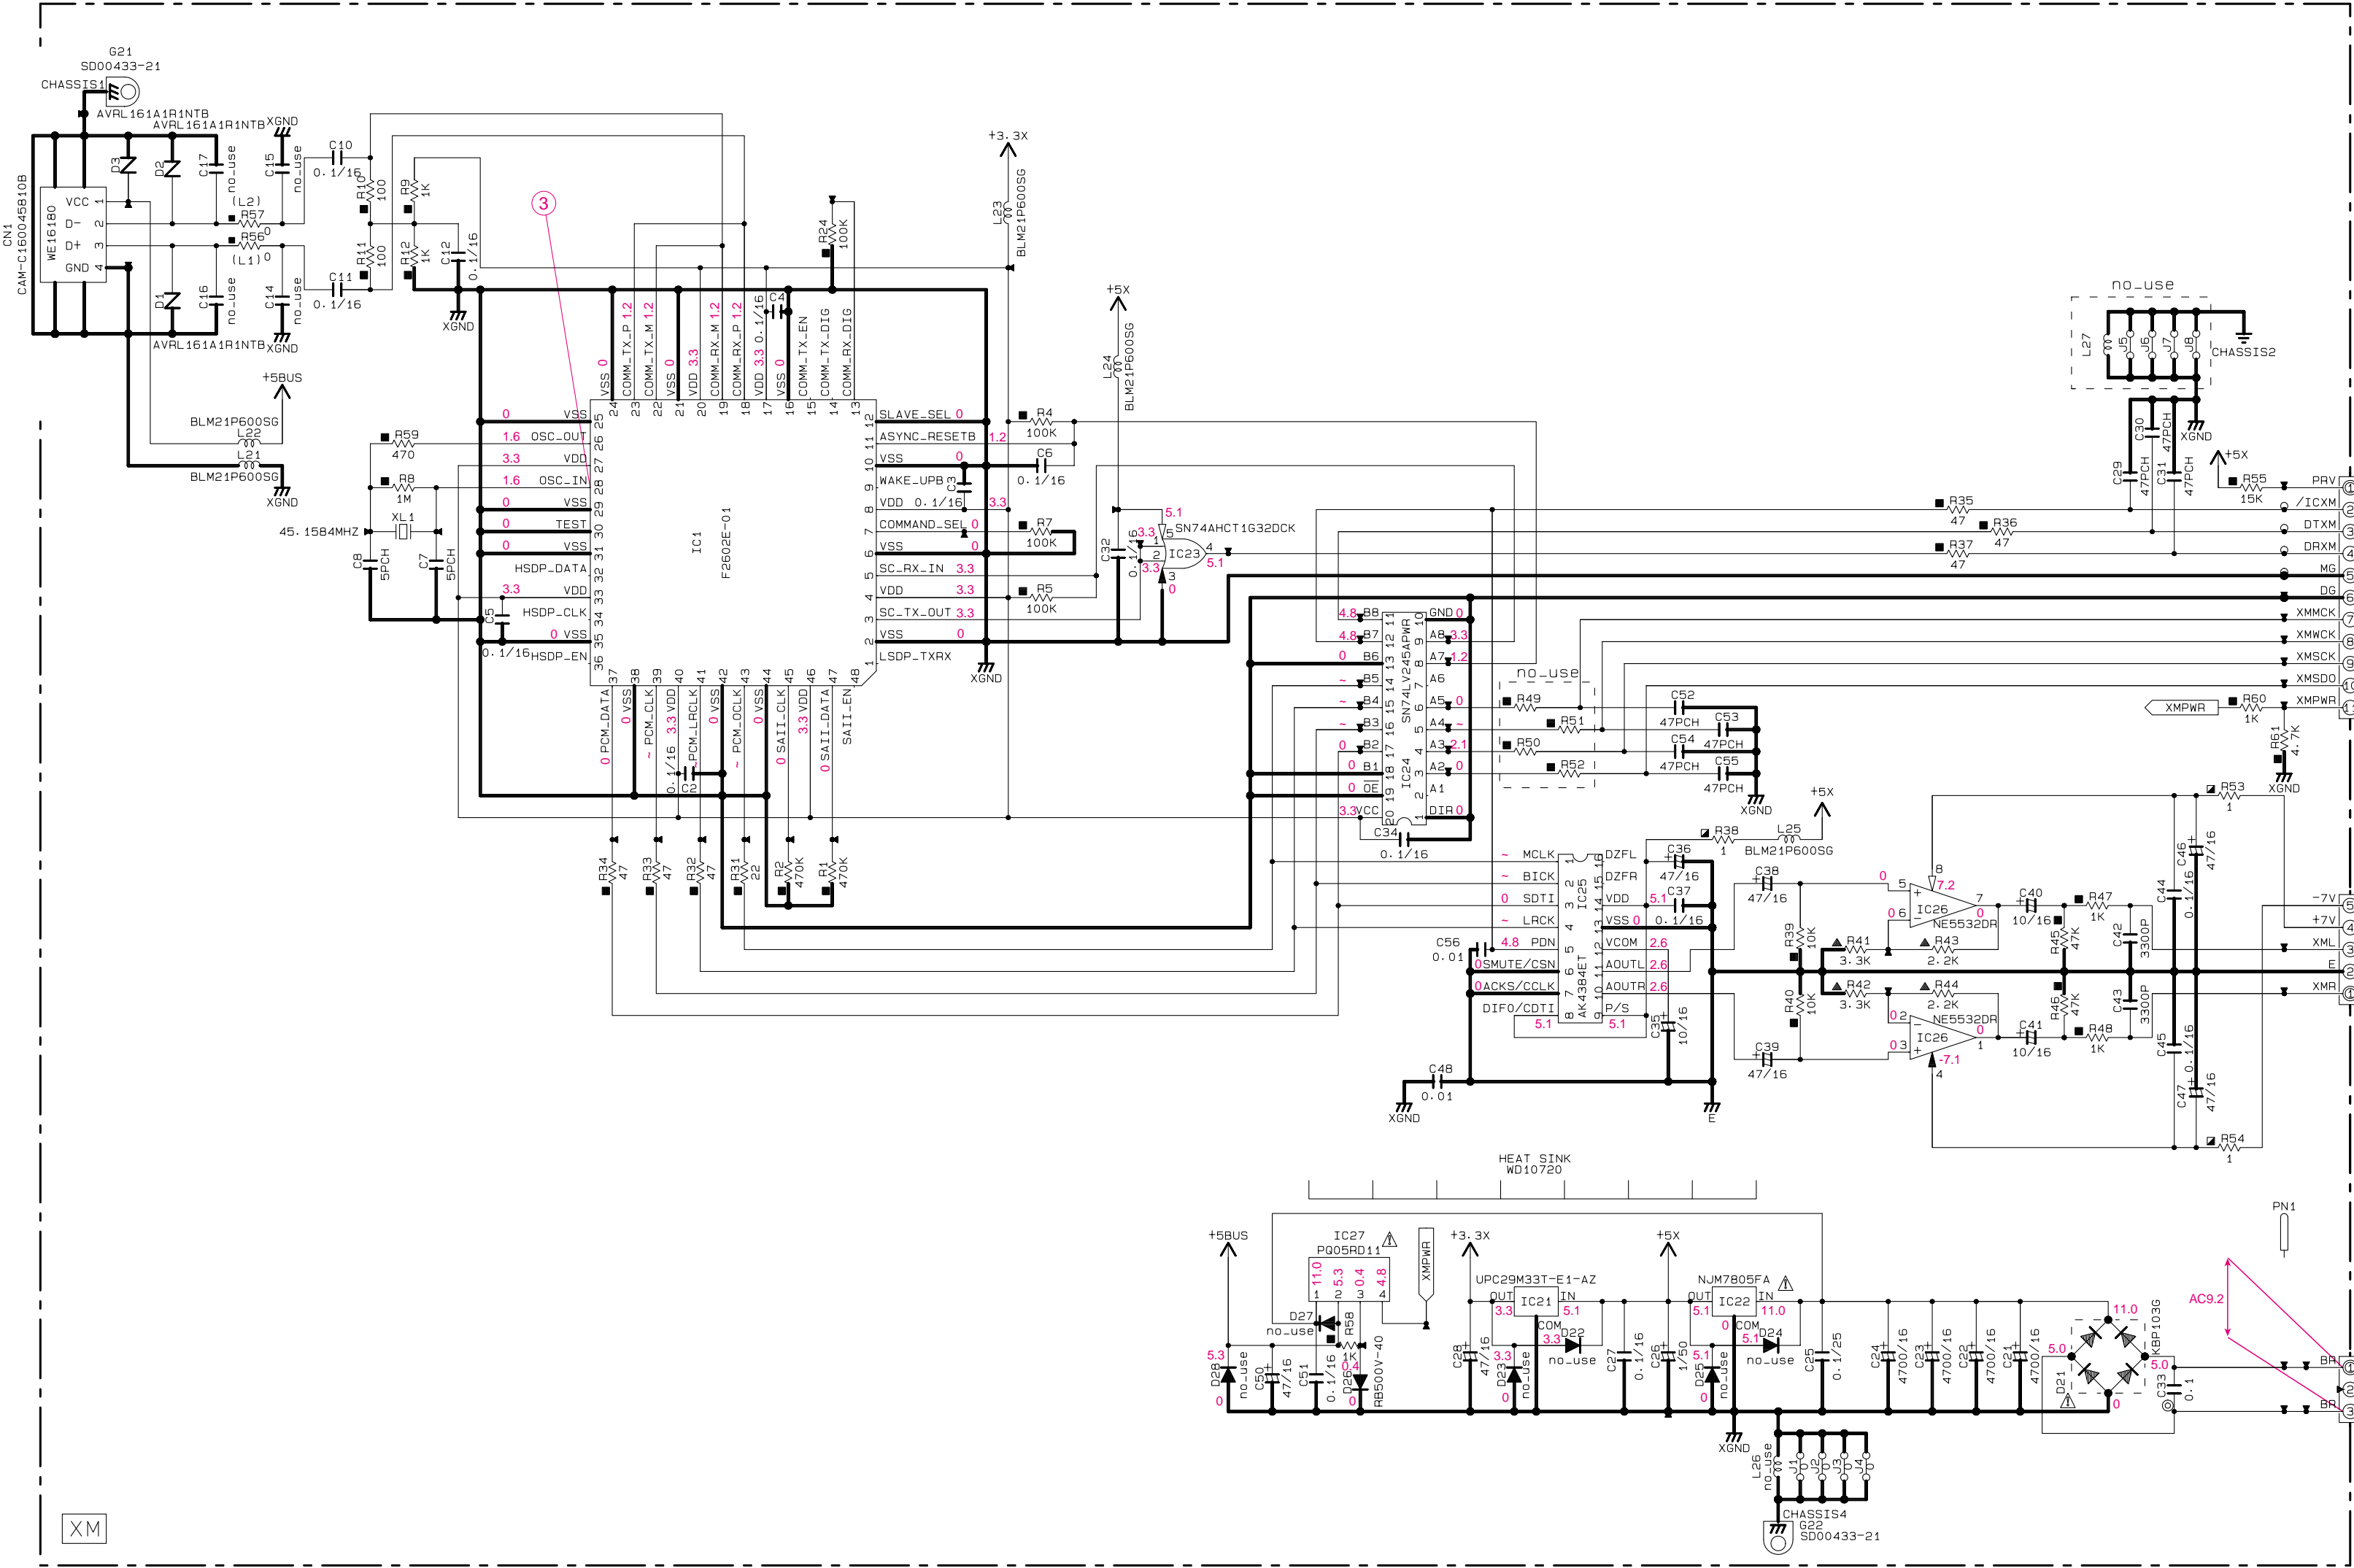

CAPACITOR		
REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	E
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	C
●	CERAMIC TUBULAR CAPACITOR	
⊙	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
⊖	MICA CAPACITOR	
⊕	POLYPROPYLENE FILM CAPACITOR	
⊗	SEMICONDUCTIVE CERAMIC CAPACITOR	
⊙	POLYPHENYLENE SULFIDE FILM CAPACITOR	

RESISTOR	
REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊠	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
⊠	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊗	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

NOTICE (model)


- (J)..... JAPAN
- (U)..... U.S.A
- (C)..... CANADA
- (R)..... GENERAL
- (T)..... CHINA
- (K)..... KOREA
- (A)..... AUSTRALIA
- (B)..... BRITISH
- (G)..... EUROPE
- (L)..... SINGAPORE
- (E)..... SOUTH EUROPE
- (V)..... TAIWAN

Page 29 E7 TO FUNCTION (2) W564


Page 29 C3 TO FUNCTION (1) W566

XM


IC24 : SN74LV245APWR  
Octal 3-State Bus Transceivers

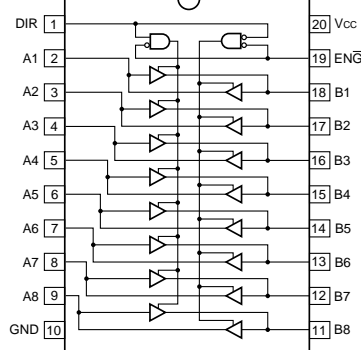


IC23 : SN74AHCT1G32DCKR  
Single 2 Input OR




IC26 : NE5532DR  
Dual OP-Amp




IC27 : PQ05RD11  
Regulator



IC25 : AK4384ET  
D/A Converter

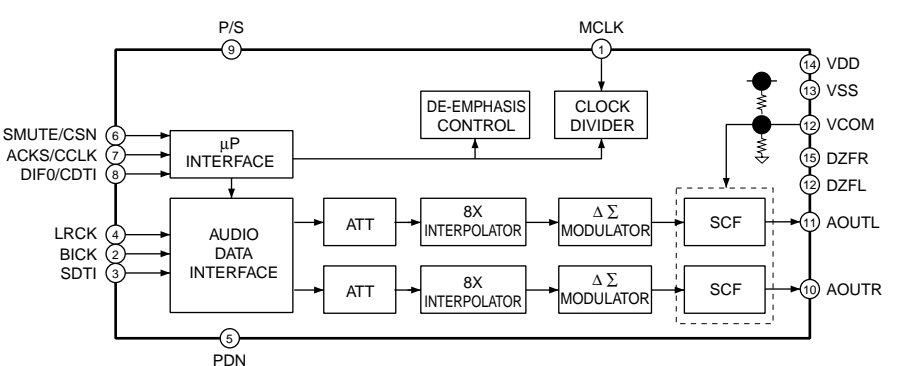

Point ③ (Pin 28 of IC1)



\* All voltages are measured with a 10MΩ/V DC electronic volt meter.  
\* Components having special characteristics are marked △ and must be replaced with parts having specifications equal to those originally installed.  
\* Schematic diagram is subject to change without notice.



# PARTS LIST

## ■ ELECTRICAL PARTS

### ■ WARNING

Components having special characteristics are marked  $\triangle$  and must be replaced with parts having specifications equal to those originally installed.

### ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS :

C.A.EL.CHP	: CHIP ALUMI. ELECTROLYTIC CAP	L.EMIT	: LIGHT EMITTING MODULE
C.CE	: CERAMIC CAP	LED.DSPLY	: LED DISPLAY
C.CE.ARRAY	: CERAMIC CAP ARRAY	LED.INFRD	: LED, INFRARED
C.CE.CHP	: CHIP CERAMIC CAP	MODUL.RF	: MODULATOR, RF
C.CE.ML	: MULTILAYER CERAMIC CAP	PHOT.CPL	: PHOTO COUPLER
C.CE.M.CHP	: CHIP MULTILAYER CERAMIC CAP	PHOT.INTR	: PHOTO INTERRUPTER
C.CE.SAFTY	: RECOGNIZED CERAMIC CAP	PHOT.RFLCT	: PHOTO REFLECTOR
C.CE.TUBLR	: CERAMIC TUBULAR CAP	PIN.TEST	: PIN, TEST POINT
C.CE.SMI	: SEMI CONDUCTIVE CERAMIC CAP	PLST.RIVET	: PLASTIC RIVET
C.EL	: ELECTROLYTIC CAP	R.ARRAY	: RESISTOR ARRAY
C.MICA	: MICA CAP	R.CAR	: CARBON RESISTOR
C.ML.FLM	: MULTILAYER FILM CAP	R.CAR.CHP	: CHIP RESISTOR
C.MP	: METALLIZED PAPER CAP	R.CAR.FP	: FLAME PROOF CARBON RESISTOR
C.MYLAR	: MYLAR FILM CAP	R.CEMENT	: CEMENT RESISTOR
C.MYLAR.ML	: MULTILAYER MYLAR FILM CAP	R.FUS	: FUSABLE RESISTOR
C.PAPER	: PAPER CAPACITOR	R.MTL.CHP	: CHIP METAL FILM RESISTOR
C.PLS	: POLYSTYRENE FILM CAP	R.MTL.FLM	: METAL FILM RESISTOR
C.POL	: POLYESTER FILM CAP	R.MTL.OXD	: METAL OXIDE FILM RESISTOR
C.POLY	: POLYETHYLENE FILM CAP	R.MTL.PLAT	: METAL PLATE RESISTOR
C.PP	: POLYPROPYLENE FILM CAP	RSNR.CE	: CERAMIC RESONATOR
C.TNTL	: TANTALUM CAP	RSNR.CRYS	: CRYSTAL RESONATOR
C.TNTL.CHP	: CHIP TANTALUM CAP	R.TW.CEM	: TWIN CEMENT FIXED RESISTOR
C.TRIM	: TRIMMER CAP	SCR.BND.HD	: BIND HEAD B-TITE SCREW
CN	: CONNECTOR	SCR.BW.HD	: BW HEAD TAPPING SCREW
CN.BS.PIN	: CONNECTOR, BASE PIN	SCR.CUP	: CUP TITE SCREW
CN.CANNON	: CONNECTOR, CANNON	SCR.TERM	: SCREW TERMINAL
CN.DIN	: CONNECTOR, DIN	SCR.TR	: SCREW, TRANSISTOR
CN.FLAT	: CONNECTOR, FLAT CABLE	SUPRT.PCB	: SUPPORT, P.C.B.
CN.POST	: CONNECTOR, BASE POST	SURG.PRTCT	: SURGE PROTECTOR
COIL.MX.AM	: COIL, AM MIX	SW.TACT	: TACT SWITCH
COIL.AT.FM	: COIL, FM ANTENNA	SW.LEAF	: LEAF SWITCH
COIL.DT.FM	: COIL, FM DETECT	SW.LEVER	: LEVER SWITCH
COIL.MX.FM	: COIL, FM MIX	SW.MICRO	: MICRO SWITCH
COIL.OUTPT	: OUTPUT COIL	SW.PUSH	: PUSH SWITCH
DIOD.ARRAY	: DIODE ARRAY	SW.RT.ENC	: ROTARY ENCODER
DIODE.BRG	: DIODE BRIDGE	SW.RT.MTR	: ROTARY SWITCH WITH MOTOR
DIODE.CHP	: CHIP DIODE	SW.RT	: ROTARY SWITCH
DIODE.SHOT	: SCHOTTKY BARRIER DIODE	SW.SLIDE	: SLIDE SWITCH
DIODE.VAR	: VARACTOR DIODE	TERM.SP	: SPEAKER TERMINAL
DIOD.Z.CHP	: CHIP ZENER DIODE	TERM.WRAP	: WRAPPING TERMINAL
DIODE.ZENR	: ZENER DIODE	THRMST.CHP	: CHIP THERMISTOR
DSCR.CE	: CERAMIC DISCRIMINATOR	TR.CHP	: CHIP TRANSISTOR
FER.BEAD	: FERRITE BEADS	TR.DGT	: DIGITAL TRANSISTOR
FER.CORE	: FERRITE CORE	TR.DGT.CHP	: CHIP DIGITAL TRANSISTOR
FET.CHP	: CHIP FET	TRANS	: TRANSFORMER
FL.DSPLY	: FLUORESCENT DISPLAY	TRANS.PULS	: PULSE TRANSFORMER
FLTR.CE	: CERAMIC FILTER	TRANS.PWR	: POWER TRANSFORMER ASS'y
FLTR.COMB	: COMB FILTER MODULE	TUNER.AM	: TUNER PACK, AM
FLTR.LC.RF	: LC FILTER, EMI	TUNER.FM	: TUNER PACK, FM
GND.MTL	: GROUND PLATE	TUNER.PK	: FRONT-END TUNER PACK
GND.TERM	: GROUND TERMINAL	VR	: ROTARY POTENTIOMETER
HOLDER.FUS	: FUSE HOLDER	VR.MTR	: POTENTIOMETER WITH MOTOR
IC.PRTCT	: IC PROTECTOR	VR.SW	: POTENTIOMETER WITH ROTARY SW
JUMPER.CN	: JUMPER CONNECTOR	VR.SLIDE	: SLIDE POTENTIOMETER
JUMPER.TST	: JUMPER, TEST POINT	VR.TRIM	: TRIMMER POTENTIOMETER
L.DTCT	: LIGHT DETECTING MODULE		

**Note)** Those parts marked with “#” are not included in the P.C.B. ass'y.

## P.C.B. FUNCTION

Ref No.	Part No.	Description	Market
* WG053700	P.C.B.	FUNNCTION	UC
* WG053800	P.C.B.	FUNNCTION	RL
* WG053900	P.C.B.	FUNNCTION	A
* WG054000	P.C.B.	FUNNCTION	GE
CB451	V7827200	SOCKET 5P TE TUC SERIES	UC
CB501	V7827600	SOCKET 9P SE TUC SERIES	
CB502	V7827900	SOCKET 12P TE TUC SERIES	
CB506	VB858200	CN.BS.PIN 3P	
CB602	V7826200	CN 12P TE TUC SERIES	
CB603	V7825900	CN 9P TE TUC SERIES	
CB604	VM859500	CN.BS.PIN 11P	
CB605	VF283100	CN.BS.PIN 13P	
CB606	VQ047600	CN.BS.PIN 21P	
CB607	V7826300	CN 13P TE TUC SERIES	
CB608	VM859600	CN.BS.PIN 15P	
CB609	V7825500	CN 5P TE TUC SERIES	
CB610	VQ044400	CN.BS.PIN 9P	
CB611	VP682200	CN.BS.PIN 8P	
CB781	VB858500	CN.BS.PIN 6P	
C451-453	UR837100	C.EL 10uF 16V	UC
C454-455	UR819100	C.EL 1000uF 6.3V	
C457-458	US135100	C.CE.CHP 0.1uF 16V	
C463	UR837470	C.EL 47uF 16V	
C466	US061470	C.CE.CHP 47pF 50V B	
C467	UR837100	C.EL 10uF 16V	
C468	UR838330	C.EL 330uF 16V	
C501-506	US062220	C.CE.CHP 220pF 50V B	
C507-508	US062100	C.CE.CHP 100pF 50V B	
C509-510	US062220	C.CE.CHP 220pF 50V B	
C511-512	US062100	C.CE.CHP 100pF 50V B	
C513-514	UR837100	C.EL 10uF 16V	
C533-536	UR837100	C.EL 10uF 16V	
C537	US064100	C.CE.CHP 0.01uF 50V B	
C538-539	US062100	C.CE.CHP 100pF 50V B	
C540-541	UR837100	C.EL 10uF 16V	
C542-543	US135100	C.CE.CHP 0.1uF 16V	UC
C550-551	UR867470	C.EL 47uF 50V	
C552-553	UR837100	C.EL 10uF 16V	
C558-559	US064100	C.CE.CHP 0.01uF 50V B	
C560-561	UR838100	C.EL 100uF 16V	
C566-567	UR837100	C.EL 10uF 16V	
C568	UA655180	C.MYLAR 0.18uF 50V J	
C569	UR837100	C.EL 10uF 16V	
C570-571	UA654220	C.MYLAR 0.022uF 50V J	
C572	UR837100	C.EL 10uF 16V	
C573-574	US064100	C.CE.CHP 0.01uF 50V B	
C575-576	UR837470	C.EL 47uF 16V	
C577	UA655180	C.MYLAR 0.18uF 50V J	
C601	UR877100	C.EL 10uF 63V	
C602	US135100	C.CE.CHP 0.1uF 16V	
C604	UR866220	C.EL 2.2uF 50V	
C607	UR866220	C.EL 2.2uF 50V	
C608	UR837100	C.EL 10uF 16V	

\* New Parts

Ref No.	Part No.	Description	Market
C609-610	US135100	C.CE.CHP 0.1uF 16V	UC
C611	UR818220	C.EL 220uF 6.3V	
C612	WB165500	C.EL 0.33F 5.5V	
C613	UR818220	C.EL 220uF 6.3V	
C614	UR818100	C.EL 100uF 6.3V	
C615	UR837470	C.EL 47uF 16V	
C616	US135100	C.CE.CHP 0.1uF 16V	
C617	UR837470	C.EL 47uF 16V	
C618	UR837100	C.EL 10uF 16V	
C619	US135100	C.CE.CHP 0.1uF 16V	
C620	UR838330	C.EL 330uF 16V	
C621	US135100	C.CE.CHP 0.1uF 16V	
C622-623	US062330	C.CE.CHP 330pF 50V B	
C624	US064100	C.CE.CHP 0.01uF 50V B	
C625	US063100	C.CE.CHP 1000pF 50V B	
C626	US062100	C.CE.CHP 100pF 50V B	
C627-628	UR837470	C.EL 47uF 16V	UC
C629	US062560	C.CE.CHP 560pF 50V B	
C630	US061270	C.CE.CHP 27pF 50V B	
C631	US135100	C.CE.CHP 0.1uF 16V	
C632	US061270	C.CE.CHP 27pF 50V B	
C633	UR837470	C.EL 47uF 16V	
C634-636	US062100	C.CE.CHP 100pF 50V B	
C637	UR866220	C.EL 2.2uF 50V	
C781-782	US063100	C.CE.CHP 1000pF 50V B	
C783	US062220	C.CE.CHP 220pF 50V B	
C784-786	US064100	C.CE.CHP 0.01uF 50V B	
D451	VU996300	DIODE.ZENR MA8120-H 12.3V	
D503-504	VU994300	DIODE.ZENR MA8075-H 7.7V	
D601-602	VU992600	DIODE.ZENR MA8051-M 5.1V	
D603-604	VT332900	DIODE 1SS355	
D605	VV833200	DIODE 1SS380	UC
D606	VU992600	DIODE.ZENR MA8051-M 5.1V	
D607	VT332900	DIODE 1SS355	
D608	VU993000	DIODE.ZENR MA8056-M 5.6V	
D609	VU996300	DIODE.ZENR MA8120-H 12.3V	
D781	VT332900	DIODE 1SS355	
IC451	XH436A00	IC LA7956	
IC501	X5043A00	IC NJU7313AM	
IC502	X3547A00	IC BD3841FS	
IC504	X3505A00	IC NJM2068MD-TE2	
IC510	X3505A00	IC NJM2068MD-TE2	
IC601	X5041A00	IC NJU7201L55 5.5V	
* IC602	X7092A00	IC.CPU CPU MASK ROM	
IC603	X0082A00	IC LC72722PM	
JK781-782	VJ726800	JACK.MNI LGY6501-0600C	
PJ451-452	WD195500	JACK.PIN RJ-1078_04-0351A	UC
* PJ454	WD195700	JACK.PIN 1P	
* PJ501	WD195400	JACK.PIN 6P	
PJ502-503	WD195200	JACK.PIN 4P	
* PJ781	WD195600	JACK.PIN 1P	
PN501	V9637500	PIN L=70 #18	
PN601	V9637500	PIN L=70 #18	

\* New Parts

## P.C.B. FUNCTION & OPERATION

\*  
\*  
\*

\* New Parts

\*

\* New Parts

<b>P.C.B. OPERATION &amp; MAIN</b>
------------------------------------

Ref No.	Part No.	Description	Market
C833	US064100	C.CE.CHP 0.01uF 50V B	
C834-836	UA654100	C.MYLAR 0.01uF 50V J	
D431	VU171900	DIODE.ZENR UDZ5.1B 5.1V	
D442	VR711500	LED(or) SLR-325DC	
D802	V2598200	LED SIR-505ST	
* D803-804	VU171300	DIODE.ZENR UDZS3.0BTE-17 3.0V	
D805	VS997800	DIODE 1T2	
* D806	VU173400	DIODE.ZENR UDZS22B TE-17 22V	
IC301	X3505A00	IC NJM2068MD-TE2	
IC401	X3505A00	IC NJM2068MD-TE2	
IC431	XF494A00	IC LB1641	
IC751	X3505A00	IC NJM2068MD-TE2	
IC801	X6386A00	IC M66003-0131FP	
JK801	V4478300	JACK.PHONE JY-6317Y-03-030	
* PJ301-302	WD195100	JACK.PIN 2P	
PN301	V9637500	PIN L=70 #18	
PN751-753	V9637500	PIN L=70 #18	
Q401-402	VZ725900	TR 2SD1938F S,T	
Q404	VV655700	TR.DGT DTC144EKA	
Q801	iA101510	TR 2SA1015 Y	
Q802	VV556400	TR 2SC2412K Q,R,S	
R329	VP940800	R.MTL.OXD 470 1W	
* R330-331	HC653220	R.CAR 2.2 1/4 J AX TP	
R332	VP940800	R.MTL.OXD 470 1W	
R401-402	VP940800	R.MTL.OXD 470 1W	
R422-423	HV755100	R.CAR.FP 100 1/4W	
R431	VS267200	R.MTL.OXD 82 1W	
R434	HV754100	R.CAR.FP 10 1/4W	
R803	HV754100	R.CAR.FP 10 1/4W	
R829	HV756220	R.CAR.FP 2.2K 1/4W	
R830	HV755100	R.CAR.FP 100 1/4W	
R867-868	VP944500	R.MTL.OXD 390 1W	
ST801	V4040500	SCR.TERM M3	
SW402	VV399800	SW.PUSH SPUN12	
SW801-814	WD483100	SW.TACT SKRGAAD010	
SW816	WD483100	SW.TACT SKRGAAD010	
SW818	WD483100	SW.TACT SKRGAAD010	
SW823	WD483100	SW.TACT SKRGAAD010	
SW825-826	WD483100	SW.TACT SKRGAAD010	
SW827	V9266400	SW.RT.ENC XREB12105PVB25F	
SW828	WD483100	SW.TACT SKRGAAD010	
SW830	V4466400	SW.PUSH SDKLA1-AP1 TV-5	
SW831	V3573100	SW.PUSH SPUN120200	
TE250	VT915000	OUTLET.AC 1P	A
TE250	VU543400	OUTLET.AC 2P	GEL
U801	V8210200	L.DTCT GP1UD271XK	
* V801	WF519900	FL.DSPLY	
VR431	VR710500	VR.MTR A100K	
VR751	VP741800	VR B20K	
VR752	VP741900	VR G25K	
VR753	VP742000	VR MN100K	
VR754	WF774500	VR A100K	
*	WG083700	SHEET	

\* New Parts

Ref No.	Part No.	Description	Market
	VR380100	SPACER FL-T6	
*	WG052200	P.C.B. MAIN	UC
*	WG052300	P.C.B. MAIN	R
*	WG052400	P.C.B. MAIN	A
*	WG052500	P.C.B. MAIN	GE
*	WG052600	P.C.B. MAIN	L
CB101	LB932050	CN.BS.PIN 5P	
CB103	VB390400	CN.BS.PIN 8P	
CB106	VF728300	CN 6P	
CB107	VB390500	CN.BS.PIN 9P	
CB252	VG879900	CN.BS.PIN 2P	
CB253-254	WC050700	CLIP.FUSE EYF-52BCY	UCGE
CB255-256	WC050700	CLIP.FUSE EYF-52BCY	
CB257	VG879900	CN.BS.PIN 2P	
CB285	LB918020	CN.BS.PIN 2P	
* CB291	V9377800	CN.BS.PIN 3P SE VH SERIES	RL
* CB292	V9377900	CN.BS.PIN 4P SE VH SERIES	RL
CB293-294	WC050700	CLIP.FUSE EYF-52BCY	R
CB295	V7825600	CN 6P TE TUC SERIES	
CB296	V7827300	SOCKET 6P TE TUC SERIES	
C101-102	UR866470	C.EL 4.7uF 50V	
C103-106	UA652100	C.MYLAR 100pF 50V J	
C107-108	UA653100	C.MYLAR 1000pF 50V J	
C109-110	UR837470	C.EL 47uF 16V	
C111-112	WE100100	C.PP 15pF 630V	
C113-114	UR867470	C.EL 47uF 50V	
C115-116	UU367470	C.EL 47uF 50V	
C117-120	VR325000	C.MYLAR 100pF 100V	
C121-122	UA654820	C.MYLAR 0.082uF 50V J	
C123-124	UA655100	C.MYLAR 0.1uF 50V J	
C125-126	UA654220	C.MYLAR 0.022uF 50V J	
C127	UA652100	C.MYLAR 100pF 50V J	
C129	UR778330	C.EL 330uF 63V	
C131	UR866470	C.EL 4.7uF 50V	
C134	VJ599100	C.CE.TUBLR 0.1uF 50V	
C135	UA655100	C.MYLAR 0.1uF 50V J	
C136	UR867470	C.EL 47uF 50V	
C137	UR866470	C.EL 4.7uF 50V	
C138-139	UR867470	C.EL 47uF 50V	
C140-141	WG399600	C.EL 6800uF 63V	
C142-143	VR324900	C.MYLAR 0.1uF 100V	
C144	UA655100	C.MYLAR 0.1uF 50V J	
C145	UR769220	C.EL 2200uF 50V	
C146	UR868330	C.EL 330uF 50V	
C147	UR818100	C.EL 100uF 6.3V	
C156-159	UA654100	C.MYLAR 0.01uF 50V J	AGEL
C161-162	UA654100	C.MYLAR 0.01uF 50V J	AGEL
C164	UR866470	C.EL 4.7uF 50V	
C251-252	UR866220	C.EL 2.2uF 50V	
C253	UA654100	C.MYLAR 0.01uF 50V J	

\* New Parts

## P.C.B. MAIN

Ref No.	Part No.	Description	Market
* C254	WD054200	C.POL.MTL 0.047uF 630V	UC
C254	WC041600	C.PP 0.022uF 630V	RAGEL
C255	UM416100	C.EL 1uF 50V	
C256	UA653470	C.MYLAR 4700pF 50V J	
C257	UA653100	C.MYLAR 1000pF 50V J	
C258	WB696300	C.POL.MTL 0.1uF 400V	UC
C258	WF081500	C.PP 0.047uF 630V J	RAGEL
C258	WF081500	C.PP 0.047uF 630V J	
△ C259	V6185300	C.CE.SAFETY 0.01uF 275V	
C260	UR039330	C.EL 3300uF 16V	UCRAGEL
C261	WE102900	C.PP 0.01uF 100V	
C265	UA654100	C.MYLAR 0.01uF 50V J	
D101-102	VN008700	DIODE 1SS270A	
D104-106	VG442900	DIODE.ZENR MTZJ27B 27V	
D108	VS997800	DIODE 1T2	
D109-110	VG441000	DIODE.ZENR MTZJ16A 16V	
△ D111	iH001090	DIODE.BRG S4VB20 2.6A 200V	
△ D112-115	VU264100	DIODE 1SR139,400	
D132-133	VD631600	DIODE 1SS133,176	
D251-252	VD631600	DIODE 1SS133,176	
D253	VG435800	DIODE.ZENR MTZJ3.0A 3.0V	
D254	VG438300	DIODE.ZENR MTZJ6.8B 6.8V	
D255	VG439500	DIODE.ZENR MTZJ10B 10V	
D258	VG439200	DIODE.ZENR MTZJ9.1B 9.1V	
△ D259	V4756800	DIODE S1NB60 1.0A 600V	
D260	VD631600	DIODE 1SS133,176	
D261	VR253700	DIODE.BRG S1NB20 1A 200V	
D262	VG438000	DIODE.ZENR MTZJ6.2B 6.2V	
△ F251	WG410700	FUSE 8A 125V	UC
△ F251	VT942900	FUSE T2.5A 250V	GE
△ F252	WG410700	FUSE 8A 125V	UCR
△ F252	KB000790	FUSE T4A 250V	AGEL
△ F291	KB000790	FUSE T4A 250V	RL
G101	V5995800	PLATE.GND	
IC102	X0515A00	IC LM61CIZ THERMAL	
△ IC251	V8100500	PHOT.CPL TLP421 GR	
△ IC252	iG001180	IC TC4013BP FF	
△ IC253	V8100500	PHOT.CPL TLP421 GR	
PN101-104	V9637500	PIN L=70 #18	
PN251	V9637500	PIN L=70 #18	
△ Q101-104	iA097030	TR 2SA970 GR,BL	
△ Q105-106	VR325600	TR 2SC2229 O,Y	
△ Q107-108	iC174020	TR 2SC1740S QRS	
△ Q109-110	VP872700	TR 2SC4488 S,T	
△ Q111-112	VP872600	TR 2SA1708 S,T	
Q113-114	WC398400	TR 2SC2N5551C-AT	
Q115	WC397700	TR 2SA2N5401C-AT	
Q117-119	VP872700	TR 2SC4488 S,T	
△ Q121	VN996900	TR 2SC4495	
△ Q128	VR402300	TR 2SB647 C,D	
△ Q129A	iX630850	TR 2SA1695 O,P,Y	UCRAGE
△ Q129C	iX630860	TR 2SC4468 O,P,Y	UCRAGE
△ Q129A	WD281000	TR 2SA2151 O,P,Y	L

\* New Parts

Ref No.	Part No.	Description	Market
△ Q129C	WD281100	TR 2SC6011 O,P,Y	L
△ Q130A	iX630850	TR 2SA1695 O,P,Y	UCRAGE
△ Q130C	iX630860	TR 2SC4468 O,P,Y	UCRAGE
△ Q130A	WD281000	TR 2SA2151 O,P,Y	L
△ Q130C	WD281100	TR 2SC6011 O,P,Y	L
* Q133	WF730900	FET 2SK30ATM GR TP	
Q251	VV912300	TR.DGT DTC144ESA-TP	
Q252-253	iC181510	TR 2SC1815 Y	
Q254	WC741200	FET 2SK3850	
△ R113-114	HV754470	R.CAR.FP 47 1/4W	
△ R127-128	HV756270	R.CAR.FP 2.7K 1/4W	
R131-132	HV756100	R.CAR.FP 1K 1/4W	
R133-136	HV753470	R.CAR.FP 4.7 1/4W	
△ R137-138	V3873200	R.CEMENT 0.22 3W	
△ R145-146	VP939800	R.MTL.OXD 10 1W	
R151-152	HV754100	R.CAR.FP 10 1/4W	
△ R155-156	HV755330	R.CAR.FP 330 1/4W	
△ R163	VP940200	R.MTL.OXD 47 1W	
R164-165	HL006100	R.MTL.OXD 1K 1/2W	
R171	HV755180	R.CAR.FP 180 1/4W	
R175	HV755180	R.CAR.FP 180 1/4W	
△ R177	HV753100	R.CAR.FP 1 1/4W	
△ R178	HV754100	R.CAR.FP 10 1/4W	
R179	HV757100	R.CAR.FP 10K 1/4W	
R181	HV755180	R.CAR.FP 180 1/4W	
R189	VP944500	R.MTL.OXD 390 1W	
R196	HV755100	R.CAR.FP 100 1/4W	
△ RY101-102	V6322600	RELAY DC DH24D2-OT(M)-SL	
RY103	V5966300	RELAY DS24D2-OS(M)	
△ RY251	WE513800	RELAY DC HRM3H-DC12V	
ST101	V4040500	SCR.TERM M3	
ST251-253	V4040500	SCR.TERM M3	
ST254	V4040500	SCR.TERM M3	AGEL
SW101	V4104200	SW.SLIDE SL13B-022-AMCS	
△ * SW291	WB493700	VOLT.SELCT R8140246	R
△ SW291	WD073700	VOLT.SELCT R8140254	L
△ * T251	XW606A00	TRANS.PWR	UC
△ T251	X6351A00	TRANS.PWR	R
△ * T251	XW608A00	TRANS.PWR	AGEL
△ TE101	VC313700	TERM.SP 8P	UCRA
△ TE101	V4811400	TERM.SP 8P	GEL
△ TE251	VU543100	OUTLET.AC 2P	UC
△ TE251	V5867400	OUTLET.AC 2P AC-182-GB-11V	R
* WE998100	SCR.BND.HD 3x12	MFZN2B3	

\* New Parts

## P.C.B. XM &amp; CHIP RESISTORS

Ref No.	Part No.	Description	Market
*	WG055200	P.C.B.	XM
			UC
CB21	LB919030	CN.BS.PIN	3P
CB23	VB858400	CN.BS.PIN	5P
CB24	VM859500	CN.BS.PIN	11P
C2-6	US035100	C.CE.CHP	0.1uF 16V B
C7-8	US060500	C.CE.CHP	5pF 50V B
C10-12	US035100	C.CE.CHP	0.1uF 16V B
C21-24	UR739470	C.EL	4700uF 16V
C25	US145100	C.CE.CHP	0.1uF 25V
C26	UR866100	C.EL	1uF 50V
C27	US035100	C.CE.CHP	0.1uF 16V B
C28	UR837470	C.EL	47uF 16V
C29-31	US061470	C.CE.CHP	47pF 50V B
C32	US035100	C.CE.CHP	0.1uF 16V B
C33	VE326000	C.MYLAR	0.1uF 50V
C34	US035100	C.CE.CHP	0.1uF 16V B
C35	UR837100	C.EL	10uF 16V
C36	UR837470	C.EL	47uF 16V
C37	US135100	C.CE.CHP	0.1uF 16V
C38-39	UR837470	C.EL	47uF 16V
C40-41	UR837100	C.EL	10uF 16V
C42-43	US063330	C.CE.CHP	3300pF 50V B
C44-45	US135100	C.CE.CHP	0.1uF 16V
C46-47	UR837470	C.EL	47uF 16V
C48	US064100	C.CE.CHP	0.01uF 50V B
C50	UR837470	C.EL	47uF 16V
C51	US035100	C.CE.CHP	0.1uF 16V B
C52-55	US061470	C.CE.CHP	47pF 50V B
C56	US064100	C.CE.CHP	0.01uF 50V B
* CN1	WE161800	CN	CAM-C16 4P SE
D1-3	WE674800	DIODE	AVRL161A1R1NTB
⚠ D21	WA653100	DIODE.BRG	KBP103G 1.0A 200V
D26	V2376600	DIODE.SHOT	RB500V-40
G21-22	WB438000	TERM.GND	M4 SD00433-21
* IC1	X6227B00	IC	F2602E-01
IC21	X6051A00	IC	UPC29M33T-E1-AZ
⚠ IC22	XJ607A00	IC	NJM7805FA 5V
IC23	X2080A00	IC	SN74AHCT1G32DCKR
IC24	X3693A00	IC	SN74LV245APWR TRAN
* IC25	X6231A00	IC	AK4384ET
IC26	X5482A00	IC	NE5532DR OP AMP
⚠ IC27	XU814A00	IC	PQ05RD11 +5V 1.0A
PN1	V9637500	PIN	L=70 #18
R38	HV753100	R.CAR.FP	1 1/4W
R53-54	HV753100	R.CAR.FP	1 1/4W
* XL1	WE436500	RSNR.CRYS	45.1584M DSX840GA
	WE774200	SCR.BND.HD	3x10 MFZN2W3

\* New Parts

Ref No.	Part No.	Description	Market
		R.CHP	0 1/16W J
		R.CHP	2.2 1/16W J
		R.CHP	22 1/16W J
		R.CHP	47 1/16W J
		R.CHP	75 1/16W J
		R.CHP	82 1/16W J
		R.CHP	100 1/16W J
		R.CHP	220 1/16W J
		R.CHP	270 1/16W J
		R.CHP	330 1/16W J
		R.CHP	390 1/16W J
		R.CHP	470 1/16W J
		R.CHP	820 1/16W J
		R.CHP	1K 1/16W J
		R.CHP	1.5K 1/16W J
		R.CHP	2.2K 1/16W J
		R.CHP	2.7K 1/16W J
		R.CHP	3.3K 1/16W J
		R.CHP	4.7K 1/16W J
		R.CHP	6.8K 1/16W J
		R.CHP	8.2K 1/16W J
		R.CHP	10K 1/16W J
		R.CHP	12K 1/16W J
		R.CHP	15K 1/16W J
		R.CHP	22K 1/16W J
		R.CHP	27K 1/16W J
		R.CHP	33K 1/16W J
		R.CHP	39K 1/16W J
		R.CHP	47K 1/16W J
		R.CHP	82K 1/16W J
		R.CHP	100K 1/16W J
		R.CHP	220K 1/16W J
		R.CHP	470K 1/16W J
		R.CHP	1M 1/16W J
		R.MTL.CHP	82 1/16W D
		R.MTL.CHP	180 1/16W D
		R.MTL.CHP	750 1/16W D
		R.MTL.CHP	1.0K 1/16W D
		R.MTL.CHP	1.8K 1/16W D
		R.MTL.CHP	2.2K 1/16W D
		R.MTL.CHP	3.3K 1/16W D
		R.MTL.CHP	8.2K 1/16W D
		R.MTL.CHP	15K 1/16W D
		R.MTL.CHP	56K 1/16W D
		R.MTL.CHP	100K 1/16W D

## ■ NOTE

- The chip resistor is not supplied as a replacement part.
- When a chip resistor is necessary, use the following part.  
AAX60720: CHIP RESISTOR SAMPLE BOOK

\* New Parts

# Parts List for Carbon Resistors

Value	1/4W Type Part No.	1/6W Type Part No.	Value	1/4W Type Part No.	1/6W Type Part No.
1.0 $\Omega$	HJ35 3100	HF85 3100	10 k $\Omega$	HF45 7100	HF45 7100
1.8 $\Omega$	HJ35 3180	*	11 k $\Omega$	HF45 7110	HF45 7110
2.2 $\Omega$	HJ35 3220	HF85 3220	12 k $\Omega$	HJ35 7120	HF85 7120
3.3 $\Omega$	HJ35 3330	HF85 3330	13 k $\Omega$	HF45 7130	HF45 7130
4.7 $\Omega$	HJ35 3470	HF85 3470	15 k $\Omega$	HF45 7150	HF45 7150
5.6 $\Omega$	HJ35 3560	HF85 3560	18 k $\Omega$	HF45 7180	HF45 7180
10 $\Omega$	HF45 4100	HF45 4100	22 k $\Omega$	HF45 7220	HF45 7220
15 $\Omega$	HJ35 4150	HF85 4150	24 k $\Omega$	HF45 7240	HF45 7240
22 $\Omega$	HF45 4220	HF45 4220	27 k $\Omega$	HJ35 7270	HF85 7270
27 $\Omega$	HJ35 4270	HF85 4270	30 k $\Omega$	HF45 7300	HF45 7300
33 $\Omega$	HF45 4330	HF45 4330	33 k $\Omega$	HF45 7330	HF45 7330
39 $\Omega$	HJ35 4470	HF85 4390	36 k $\Omega$	HF45 7360	HF45 7360
47 $\Omega$	HF45 4470	HF45 4470	39 k $\Omega$	HF45 7390	HF45 7390
56 $\Omega$	HF45 4560	HF45 4560	47 k $\Omega$	HF45 7470	HF45 7470
68 $\Omega$	HF45 4680	HF45 4680	51 k $\Omega$	HF45 7510	HF45 7510
75 $\Omega$	HF45 4750	HF45 4750	56 k $\Omega$	HF45 7560	HF45 7560
82 $\Omega$	HF45 4820	HF45 4820	62 k $\Omega$	HF45 7620	HF45 7620
91 $\Omega$	HF45 4910	HF45 4910	68 k $\Omega$	HF45 7680	HF45 7680
100 $\Omega$	HF45 5100	HF45 5100	82 k $\Omega$	HF45 7820	HF45 7820
110 $\Omega$	HJ35 5110	HF85 5110	91 k $\Omega$	HF45 7910	HF45 7910
120 $\Omega$	HF45 5120	HF45 5120	100 k $\Omega$	HF45 8100	HF45 8100
150 $\Omega$	HF45 5150	HF45 5150	110 k $\Omega$	HF45 8110	HF45 8110
160 $\Omega$	HJ35 5160	*	120 k $\Omega$	HF45 8120	HF45 8120
180 $\Omega$	HF45 5180	HF45 5180	150 k $\Omega$	HF45 8150	HF45 8150
200 $\Omega$	HF45 5200	HF45 5200	180 k $\Omega$	HF45 8180	HF45 8180
220 $\Omega$	HF45 5220	HF45 5220	220 k $\Omega$	HJ35 8220	HF85 8220
270 $\Omega$	HF45 5270	HF45 5270	270 k $\Omega$	HF45 8270	HF45 8270
330 $\Omega$	HF45 5330	HF45 5330	300 k $\Omega$	HF45 8300	HF45 8300
390 $\Omega$	HF45 5390	HF45 5390	330 k $\Omega$	HF45 8330	HF45 8330
430 $\Omega$	HF45 5430	HF45 5430	390 k $\Omega$	HJ35 8390	HF85 8390
470 $\Omega$	HF45 5470	HF45 5470	470 k $\Omega$	HF45 8470	HF45 8470
510 $\Omega$	HF45 5510	HF45 5510	560 k $\Omega$	HJ35 8560	HF85 8560
560 $\Omega$	HF45 5560	HF45 5560	680 k $\Omega$	HJ35 8680	HF85 8680
680 $\Omega$	HF45 5680	HF45 5680	820 k $\Omega$	HJ35 8820	HF85 8820
820 $\Omega$	HF45 5820	HF45 5820	1.0 M $\Omega$	HF45 9100	HF45 9100
910 $\Omega$	HF45 5910	HF45 5910	1.2 M $\Omega$	HJ35 9120	*
1.0 k $\Omega$	HF45 6100	HF45 6100	1.5 M $\Omega$	HJ35 9150	HF85 9150
1.2 k $\Omega$	HF45 6120	HF45 6120	1.8 M $\Omega$	HJ35 9180	HF85 9180
1.5 k $\Omega$	HF45 6150	HF45 6150	2.2 M $\Omega$	HJ35 9220	HF85 9220
1.8 k $\Omega$	HF45 6180	HF45 6180	3.3 M $\Omega$	HJ35 9330	HF85 9330
2.0 k $\Omega$	HJ35 6200	HF85 6200	3.9 M $\Omega$	HJ35 9390	*
2.2 k $\Omega$	HF45 6220	HF45 6220	4.7 M $\Omega$	HJ35 9470	HF85 9470
2.4 k $\Omega$	HJ35 6240	HF85 6240			
2.7 k $\Omega$	HF45 6270	HF45 6270			
3.0 k $\Omega$	HF45 6300	HF45 6300			
3.3 k $\Omega$	HF45 6330	HF45 6330			
3.6 k $\Omega$	HJ35 6360	HF85 6360			
3.9 k $\Omega$	HF45 6390	HF45 6390			
4.7 k $\Omega$	HF45 6470	HF45 6470			
5.1 k $\Omega$	HF45 6510	HF45 6510			
5.6 k $\Omega$	HF45 6560	HF45 6560			
6.8 k $\Omega$	HF45 6680	HF45 6680			
8.2 k $\Omega$	HF45 6820	HF45 6820			
9.1 k $\Omega$	HF45 6910	HF45 6910			

**1/4W Type**

HJ35 ○○○○

10mm

**1/6W Type**


HF45 ○○○○

HF85 ○○○○

5mm

RX-497

# EXPLODED VIEW

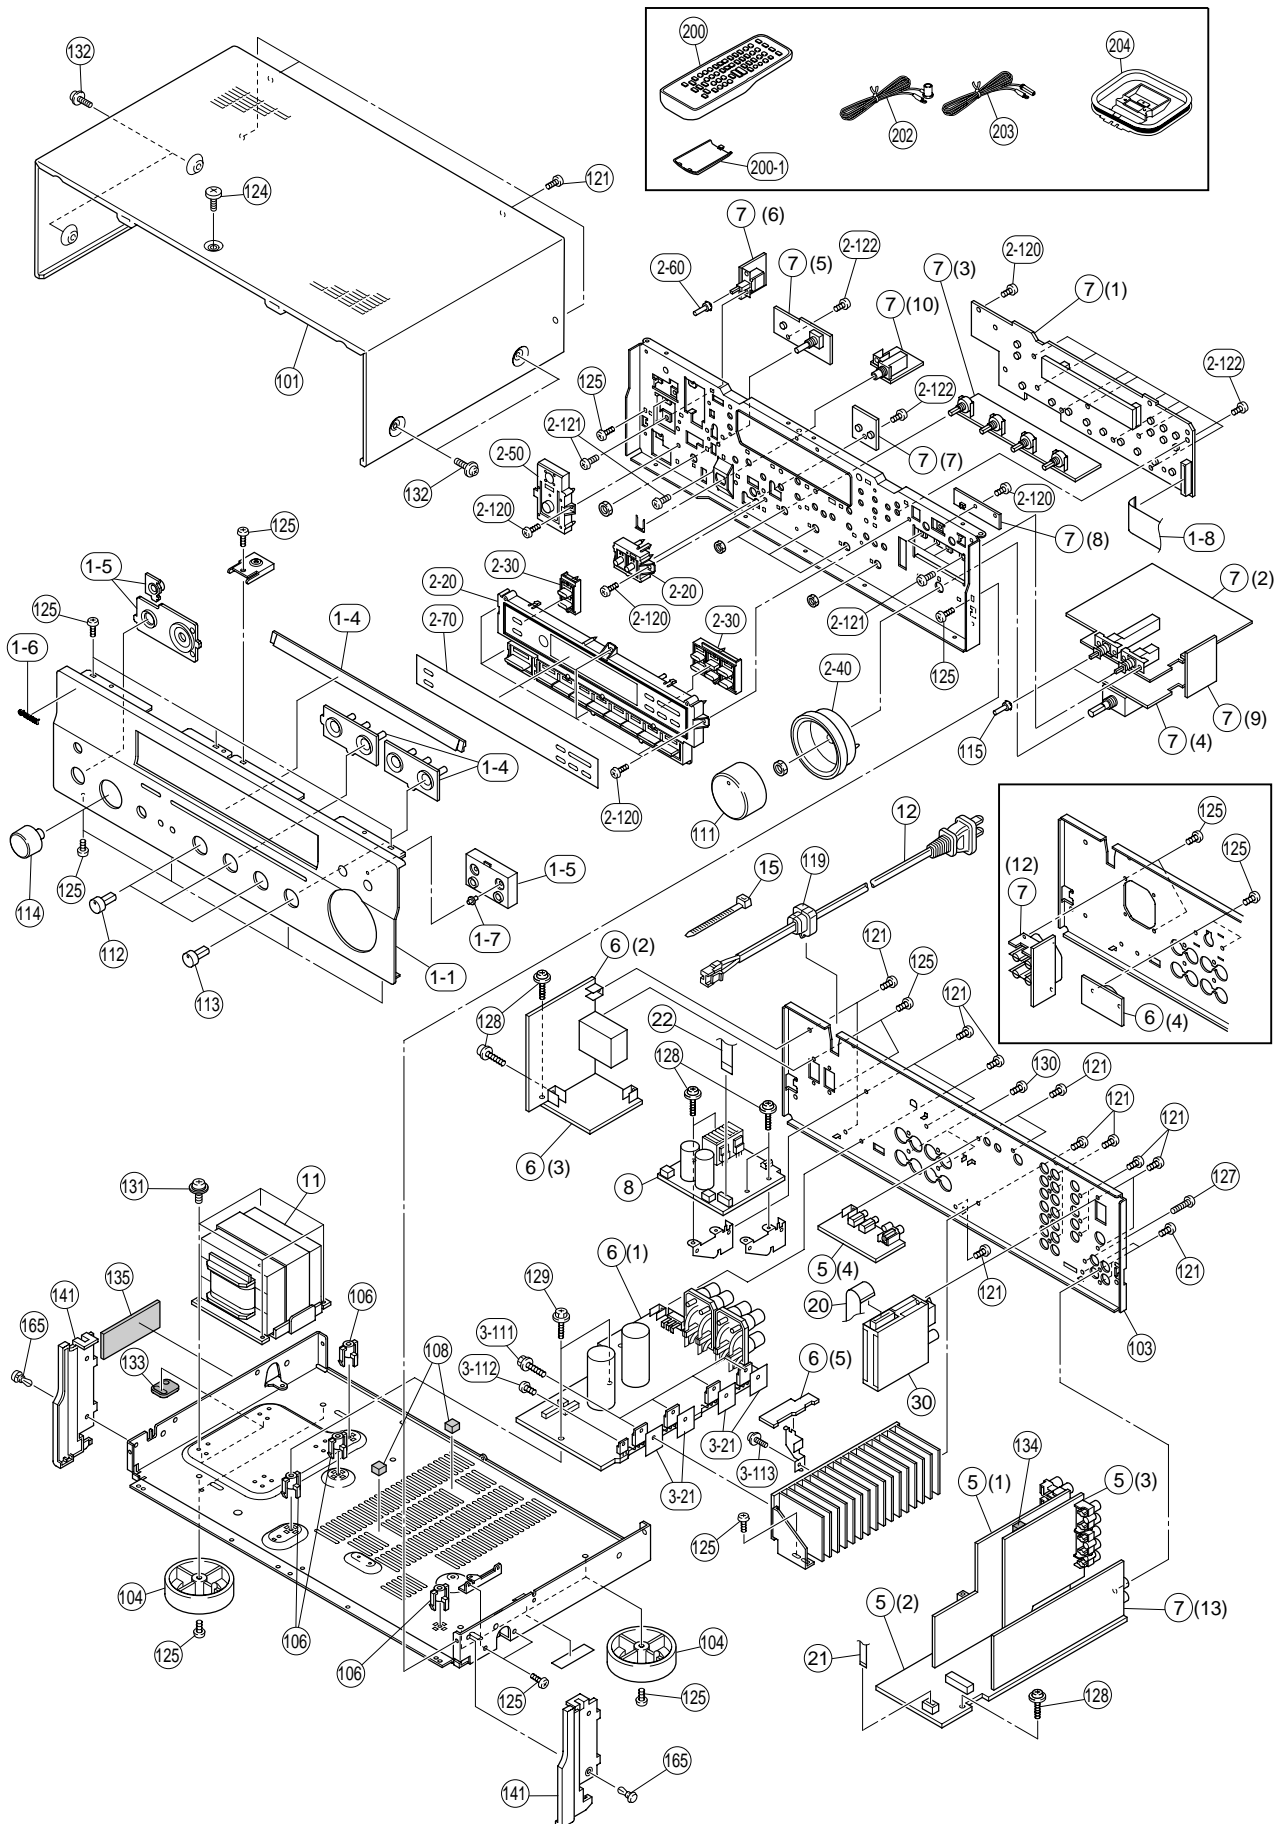



# MECHANICAL PARTS

Ref. No.	Part No.	Description	Remarks	Markets
* 1-1	WF478800	FRONT PANEL	GD	UC RAGEL
* 1-1	WF784200	FRONT PANEL	BL	
* 1-1	WF478700	FRONT PANEL	BL	
* 1-1	WF478900	FRONT PANEL	TI	
* 1-4	WF486900	ESCUTCHEON R	GD	
* 1-4	WF486800	ESCUTCHEON R	BL	
* 1-4	WF487000	ESCUTCHEON R	TI	
1-5	WF629000	ESCUTCHEON	GD	
1-5	WF628900	ESCUTCHEON	BL	
1-5	WF629100	ESCUTCHEON	TI	
1-6	V6034200	EMBLEM	GD	
1-6	V6034100	EMBLEM	BL, TI	
1-7	V4598900	LENS, 1P		
* 1-8	MF121250	FLEXIBLE FLAT CABLE	21P 250mm P=1.25	
* 2-20	WF484200	BUTTON CASE	GD	UC RAGEL
* 2-20	WF484100	BUTTON CASE	BL	
* 2-20	WF484300	BUTTON CASE	TI	
* 2-30	WF485000	BUTTON TUNER		
2-40	WF486600	ESCUTCHEON VOL	GD	
2-40	WF486500	ESCUTCHEON VOL	BL	
2-40	WF486700	ESCUTCHEON VOL	TI	
* 2-50	WF588200	BUTTON MAIN	GD	
* 2-50	WF588000	BUTTON MAIN	BL	
* 2-50	WF588300	BUTTON MAIN	TI	
2-60	V6876200	BUTTON/D5	GD	
2-60	V6876100	BUTTON/D5	BL	
2-60	V8540300	BUTTON/D5	TI	
* 2-70	WF488100	SHEET WINDOW R		
* 2-70	WF488000	SHEET WINDOW R		
2-120	WE774300	BIND HEAD B-TIGHT SCREW	3x8 MFZN2W3	UC RL A GE UC R A GE L UCR A GEL UC UC RL A GE
2-121	WE774000	BIND HEAD SCREW	3x6 MFZN2W3	
2-122	WE774800	BIND HEAD P-TIGHT SCREW	3x8 MFZN2W3	
3-21	VV849300	RADIATION SHEET	19x24	
3-111	VK173200	SCREW, TRANSISTOR	3x15 SP MFC2	
3-112	WE774300	BIND HEAD B-TIGHT SCREW	3x8 MFZN2W3	
3-113	VT669300	PW HEAD B-TIGHT SCREW	3x8-8 MFC2	
* 5	WG053700	P.C.B. ASS'Y	FUNNCTION	
* 5	WG053800	P.C.B. ASS'Y	FUNNCTION	
* 5	WG053900	P.C.B. ASS'Y	FUNNCTION	
* 5	WG054000	P.C.B. ASS'Y	FUNNCTION	
* 6	WG052200	P.C.B. ASS'Y	MAIN	
* 6	WG052300	P.C.B. ASS'Y	MAIN	
* 6	WG052400	P.C.B. ASS'Y	MAIN	
* 6	WG052500	P.C.B. ASS'Y	MAIN	
* 6	WG052600	P.C.B. ASS'Y	MAIN	
* 7	WG054600	P.C.B. ASS'Y	OPERATION	
* 7	WG054700	P.C.B. ASS'Y	OPERATION	
* 7	WG054800	P.C.B. ASS'Y	OPERATION	
* 8	WG055200	P.C.B. ASS'Y	XM	
△* 11	X7065A00	POWER TRANSFORMER		UC
△* 11	X7066A00	POWER TRANSFORMER		RL
△* 11	X7067A00	POWER TRANSFORMER		A
△* 11	X7068A00	POWER TRANSFORMER		GE

\* New Parts

Ref. No.	Part No.	Description	Remarks	Markets
△ *	12	V2727500 POWER CABLE	2m	UC
△ *	12	VN363600 POWER CABLE	2m	GEL
△ *	12	WC743700 POWER CABLE	2m	A
△ *	12	WC992700 POWER CABLE	2m	R
	15	VU590000 BINDING TIE	CBTD001B	
	20	MF115140 FLEXIBLE FLAT CABLE	15P 140mm P=1.25	
*	21	MF108160 FLEXIBLE FLAT CABLE	8P 160mm P=1.25	
	22	MF111400 FLEXIBLE FLAT CABLE	11P 400mm P=1.25	UC
	30	V6782300 AM/FM TUNER	TFCE1U115A	UCRL
*	30	V6782400 AM/FM TUNER	TFCE1E317A	AGE
*	101	WF480600 TOP COVER		GD
*	101	WF480500 TOP COVER		BL
*	101	WF480700 TOP COVER		TI
*	103	WF483000 REAR PANEL		UC
*	103	WF483100 REAR PANEL		R
*	103	WF483400 REAR PANEL		A
*	103	WF483500 REAR PANEL		L
*	103	WF483700 REAR PANEL		GE
	104	V0042500 LEG	D60xH21	GD
	104	VS025000 LEG	D60xH21	BL, TI
	106	VR264400 SPACER	H8	
	108	VQ366100 DAMPER, PCB		
	111	WF817500 KNOB D48		GD
	111	WF817400 KNOB D48		BL
	111	WF817600 KNOB D48		TI
*	112	WF485700 KNOB		GD
*	112	WF485600 KNOB		BL
*	112	WF485800 KNOB		TI
*	113	WF486000 KNOB D14L		GD
*	113	WF485900 KNOB D14L		BL
*	113	WF486100 KNOB D14L		TI
	114	WC560600 KNOB D23		GD
	114	WC560500 KNOB D23		BL
	114	WC560700 KNOB D23		TI
	115	V6876200 BUTTON/D5		GD
	115	V6876100 BUTTON/D5		BL
	115	V8540300 BUTTON/D5		TI
	119	V2438700 CORD STOPPER	10P1	
	121	WE774100 BIND HEAD BONDING B-T. SCREW	3x8 MFZN2B3	
	124	WE200400 DISH HEAD B-TIGHT SCREW	3x6 MFN133	GD, TI
	124	WE200500 DISH HEAD B-TIGHT SCREW	3x6 MFN13BL	BL
	125	WE774300 BIND HEAD B-TIGHT SCREW	3x8 MFZN2W3	
	127	VS997700 BIND HEAD S-TIGHT SCREW	3x10 MFN133	
	128	VT669300 PW HEAD B-TIGHT SCREW	3x8-8 MFC2	
	129	WE774600 SCREW IC	3x18 MFZN2W3	
	130	VY731200 BONDING HEAD TAPPING SCREW	3x10 MFN133	
	131	WE774700 BIND HEAD S-TIGHT SCREW	4x10 MFZN2W3	
	132	VD069600 PW HEAD S-TIGHT SCREW	4x8-10 MFN133	GD, TI
	132	VH313200 PW HEAD S-TIGHT SCREW	4x8-10 MFN13BL	BL
	133	VY731400 DAMPER	HOLE	
	134	VZ679700 DAMPER	T8/PCB	
	135	V4780900 DAMPER	4x30x50	RAGEL
	141	WF487700 PLATE SIDE		GD

\* New Parts


Ref. No.	Part No.	Description		Remarks	Markets
141	WF487600	PLATE SIDE		BL	
141	WF487800	PLATE SIDE		TI	
165	VQ368600	PUSH RIVET	P3555-B		
		ACCESSORIES			
* 200	WF688700	REMOTE CONTROL	RAX100		UC
* 200	WF688800	REMOTE CONTROL	RAX101		RAGEL
200-1	AAX46580	BATTERY COVER		103RRC-244-01G	
202	V6267000	INDOOR FM ANTENNA	1.4m 1pc		UCRL
203	VQ147100	INDOOR FM ANTENNA	1.4m 1pc		AGE
204	VQ307400	AM LOOP ANTENNA	81-653-645-110		
		BATTERY, MANGANESE DRY	SUM-3M 2pcs		

\* New Parts

RX-497

# REMOTE CONTROL TRANSMITTER (RAX100/RAX101)




### ■ SCHEMATIC DIAGRAM

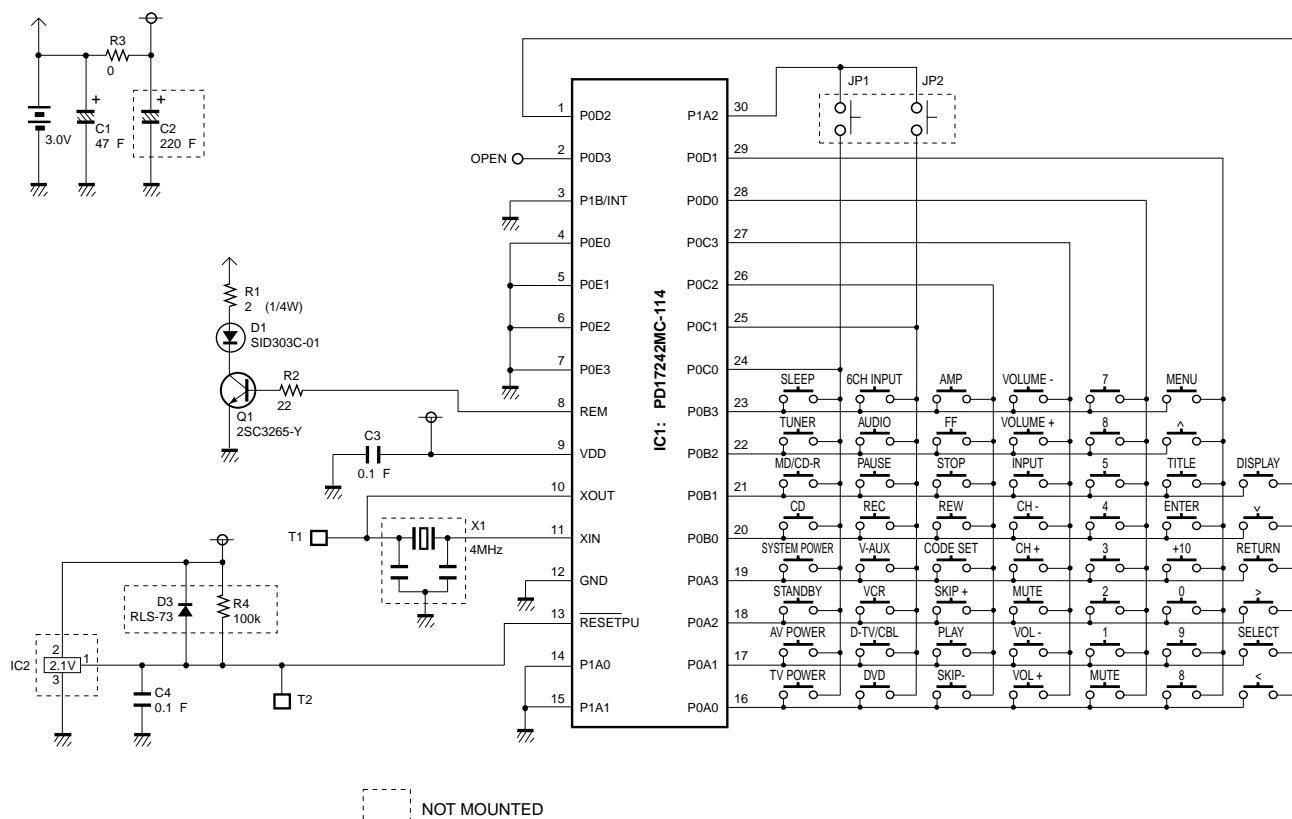

### ▼ RAX100 (U, C models)

▼ RAX101 (R, A, G, E, L models)

## KEY NO. LAYOUT

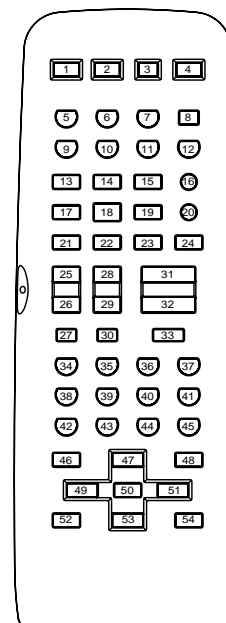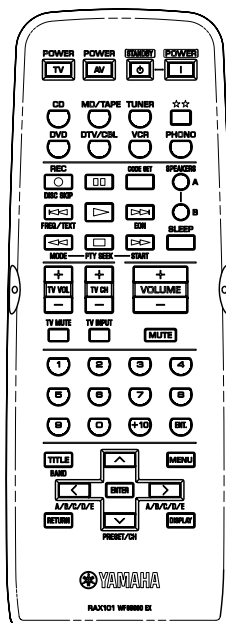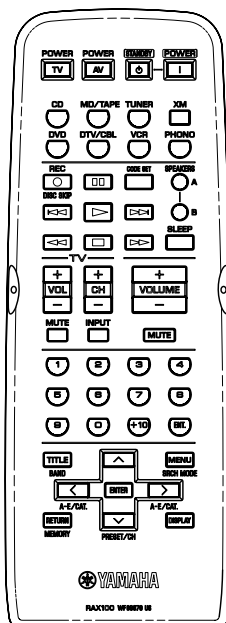

## DATA CODE LIST

Key No.	Function	CODE							XM
		COMMON	CD	TAPE	MD	CD-R	DVD	TUNER	
1	TV POWER	-	-	-	-	-	-	-	-
2	AV POWER	-	-	-	-	7F-80	7C-80	-	-
3	STANDBY	7E-7F	-	-	-	-	-	-	-
4	SYSTEM POWER	7E-7E	-	-	-	-	-	-	-
5	CD	7A-15	-	-	-	-	-	-	-
6	MD/TAPE	7A-18	-	-	-	-	-	-	-
7	TUNER	7A-16	-	-	-	-	-	-	-
8	XM ☆☆	7A-B4	-	-	-	-	-	-	-
9	DVD	7A-C1	-	-	-	-	-	-	-
10	DTV/CBL	7A-54	-	-	-	-	-	-	-
11	VCR	7A-0F	-	-	-	-	-	-	-
12	PHONO	7A-14	-	-	-	-	-	-	-
13	REC/DISC SKIP	-	7A-4F	7A-04	79-AF	-	7C-8B	-	-
14	PAUSE	-	7A-09	7A-06	79-A9	7F-83	7C-83	-	-
15	CODE SET	-	-	-	-	-	-	-	-
16	SPEAKERS A	7A-9A	-	-	-	-	-	-	-
17	SKIP -	-	7A-0B	7A-07	A9-AB	7F-86	7C-B9	7A-A4	-
18	PLAY	-	7A-08	7A-00	79-A8	7F-82	7C-82	-	-
19	SKIP +	-	7A-0A	7A-40	79-AE	7F-87	7C-BA	7A-A5	-
20	SPEAKERS B	7A-9B	-	-	-	-	-	-	-
21	REW	-	7A-0D	7A-01	79-AC	7F-88	7C-86	7A-A6	-
22	STOP	-	7A-09	7A-03	79-AA	7F-84	7C-85	-	-
23	FF	-	7A-0C	7A-02	79-AD	7F-89	7C-87	7A-A7	-
24	SLEEP	7A-57	-	-	-	-	-	-	-
25	TV VOL +	-	-	-	-	-	-	-	-
26	TV VOL -	-	-	-	-	-	-	-	-
27	TV MUTE	-	-	-	-	-	-	-	-
28	TV VH +	-	-	-	-	-	-	-	-
29	TV CH -	-	-	-	-	-	-	-	-
30	TV INPUT	-	-	-	-	-	-	-	-
31	VOL up	7A-1A	-	-	-	-	-	-	-
32	VOL down	7A-1B	-	-	-	-	-	-	-
33	MUTE	7A-1C	-	-	-	-	-	-	-
34	1	-	79-11	-	79-85	7F-91	7C-94	7A-E5	7A-61
35	2	-	79-12	-	79-86	7F-92	7C-95	7A-E6	7A-62
36	3	-	79-13	-	79-87	7F-93	7C-96	7A-E7	7A-63
37	4	-	79-14	-	79-88	7F-94	7C-97	7A-E8	7A-64
38	5	-	79-15	-	79-89	7F-95	7C-98	7A-E9	7A-65
39	6	-	79-16	-	79-8A	7F-96	7C-99	7A-EA	7A-66
40	7	-	79-17	-	79-8B	7F-97	7C-9A	7A-EB	7A-67
41	8	-	79-18	-	79-8C	7F-98	7C-9B	7A-EC	7A-68
42	9	-	79-19	-	79-8D	7F-99	7C-9C	7A-B1	7A-69
43	0	-	79-10	-	79-8E	7F-90	7C-93	7A-B2	7A-60
44	+10	-	9-1A	-	79-8F	7F-9A	7C-9D	-	-
45	ENT	-	79-0B	-	-	7F-8A	7C-9E	7A-B3	7A-8F
46	TITLE	-	-	-	-	-	7C-B1	7A-AE	7A-70
47	UP	-	-	-	-	-	7C-B4	7A-10	7A-6A
48	MENU	-	-	-	-	-	7C-B2	7A-AB	7A-6D
49	LEFT	-	-	-	-	-	7C-B5	7A-AC	7A-6E
50	SELECT	-	-	-	-	-	7C-B8	7A-AD	7A-6F
51	RIGHT	-	-	-	-	-	7C-B6	7A-12	7A-6C
52	RETURN	-	-	-	-	-	7C-B7	7A-AF	7A-71
53	DOWN	-	-	-	-	-	7C-B3	7A-11	7A-6B
54	DISPLAY	-	79-0A	-	79-A5	7F-9E	7C-A6	7A-B0	7A-72

# RX-497

---

